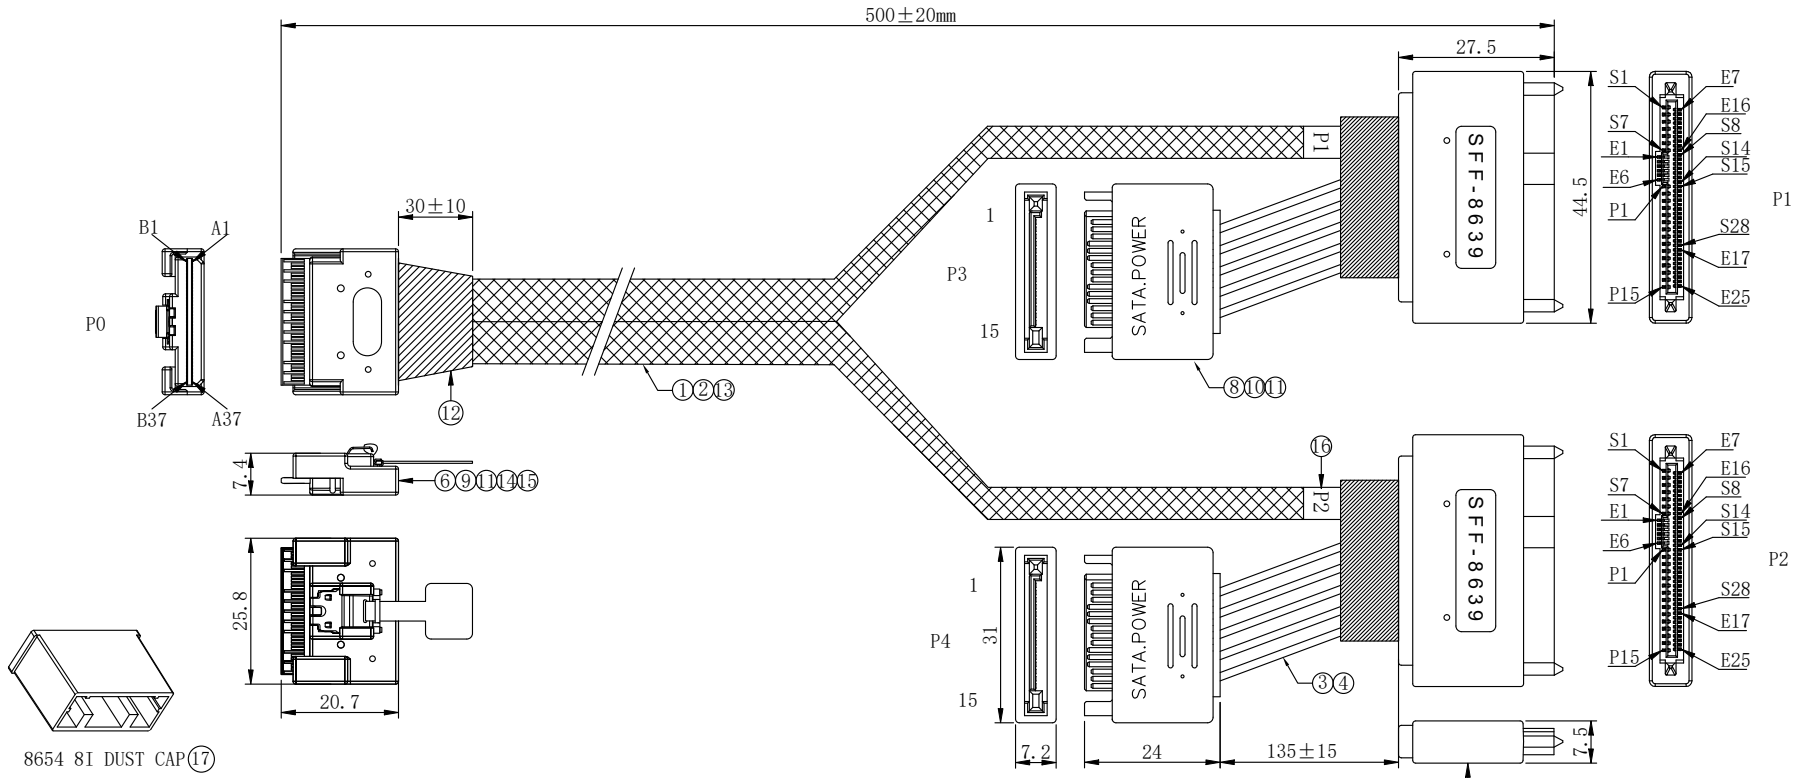


NO.	PART NAME	SPEC DESCRIPTION	Q'TY	UNIT
17	DUST CAP	8654 8I DUST CAP	1	PCS
16	LABEL	WHITE SYNTHETIC PAPER LABEL WITH BLACK TEXT "P1/P2"	2	PCS
15	PULL TAB	PULL TAB	1	PCS
14	LATCH	STAINLESS STEEL	1	PCS
13	BRAIDED SLEEVING	PET OD: 14mm BLACK	A/R	M
12	ACETATE TAPE	W=25±5mm, BLACK	A/R	M
11	MOLDING	LDPE,NATURAL	A/R	G
10	MOLDING	45P PVC BLACK	A/R	G
9	MOLDING	PBT+20G%F, BLACK	A/R	G
8	CONNECTOR	SATA 15P/M G/F BLACK	2	PCS
7	CONNECTOR	SAS 68P/F WELDED 180° BLACK	2	PCS
6	PCB	SLIMSAS 8654 8I PCB,PIN:Au 15U" 88±8 ohm	1	PCS
5	PCB	MINISAS 8639 PCB, PIN:Au 1U", 88±8 ohm	2	PCS
4	CABLE	24AWG CABLE(RED/BLACK)	A/R	M
3	CABLE	20AWG CABLE(BLACK/RED/YELLOW)	A/R	M
2	CABLE	30AWG CABLE(RED/WHITE/BLUE)(WHITE/GREEN)(BLUE)	A/R	M
1	CABLE	32AWG*1P+32AWG*2C, OD0.65*1.54mm,85±5 ohm	A/R	M

ELECTRICAL CHARACTER:
a. 100% OPEN&SHORT TESTING;
b. WITHSTANDING VOLTAGE:DC 300V 0.01Sec;
c. INSULATION RESISTANCE:10M Ohm(Min);
d. CONDUCTIVE RESISTANCE:2 Ohm (Max).

REV	DESCRIPTION OF CHANGE	DATE
A	INITIAL RELEASE	26/08/04

TOLERANCE	INCHES	MM
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05


DRAWN BY	WXF
CHECK BY	
APPD BY	
CUSTOMER P/N:	

OIKWAN® 东莞市蔻群实业有限公司
DONGGUAN AIQUN INDUSTRIAL CO.,LTD

SCALE	NONE	REV	A
UNIT	MM		
SHEET	1/2	CUSTUMER:	
DATE	26/08/04	DWG NO:	

TITLE:SLIMSAS 8654 8I-2*8639+15P

P/N:1.AMSA7FE10001

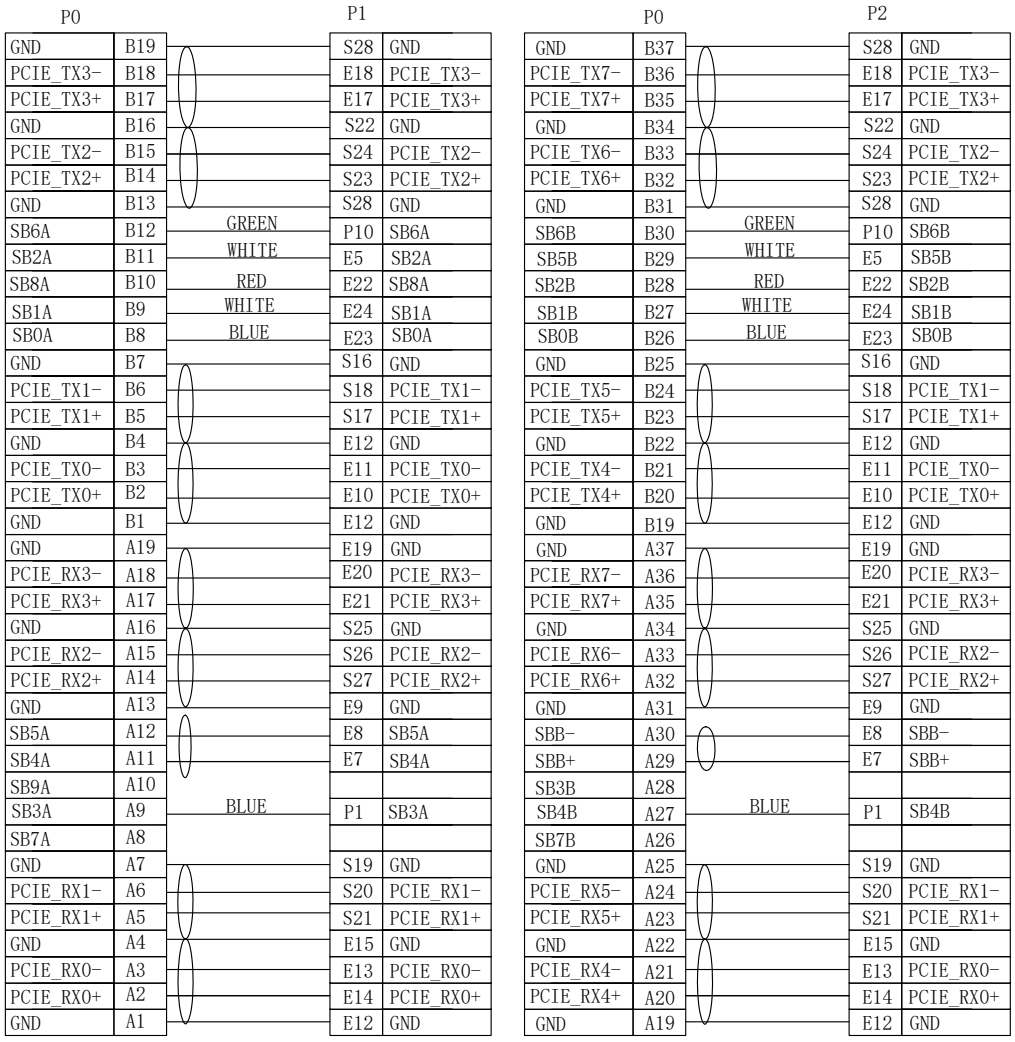

P1/P2	E3	P1	P2	P3	P4	P5	P6	P7	P8	P9	P12	P13	P14	P15
P3/P4	P1P2P3	----				P4P5P6		P7P8P9			P10P11P12	P13P14P15		
SYMBOL	3.3V	----				GND		5V			GND	12V		
WIRE AWG	24AWG RED	----				20AWG BLACK		20AWG RED			24AWG BLACK	20AWG YELLOW		

REV	DESCRIPTION OF CHANGE	DATE
A	INITIAL RELEASE	26/08/04

TOLERANCE	INCHES	MM
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05

DIKWAN® 东莞市蔻群实业有限公司
DONGGUAN AIQUN INDUSTRIAL CO.,LTD

SCALE	NONE	REV	A
UNIT	MM		
SHEET	2/2	CUSTUMER:	
DATE	26/08/04	DWG NO:	
DRAWN BY	WXF		
CHECK BY			
APPD BY		TITLE:SLIMSAS 8654 8I-2*8639+15P	
CUSTOMER P/N:		P/N:1.AMSA7FE10001	