



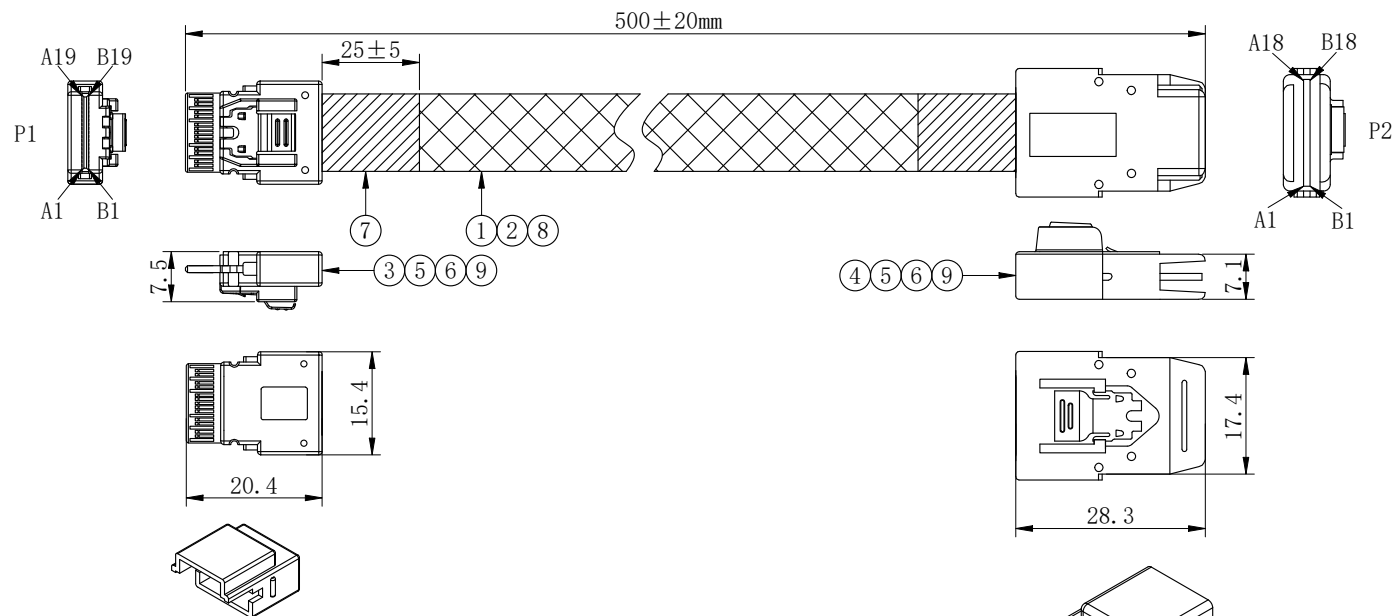

8654 4I 防尘帽⑩

电气特性:

1. 100%开路、短路、断路测试。
2. 绝缘阻抗: 10M Ohm Min
3. 导通阻抗: 2 Ohm MAX
4. 耐压: DC 300V, 0.01/Sec



8087防尘帽⑪

P1		P2	
B19	GND	A18	GND
B18	TX3-	A17	RX3-
B17	TX3+	A16	RX3+
B16	GND	A15	GND
B15	TX2-	A14	RX2-
B14	TX2+	A13	RX2+
B13	GND	A12	GND
B12	SIDEBAND	A11	SIDEBAND
B11	SIDEBAND	A10	SIDEBAND
B10	SIDEBAND		
B9	SIDEBAND	A9	SIDEBAND
B8	SIDEBAND	A8	SIDEBAND
B7	GND	A7	GND
B6	TX1-	A6	RX1-
B5	TX1+	A5	RX1+
B4	GND	A4	GND
B3	TX0-	A3	RX0-
B2	TX0+	A2	RX0+
B1	GND	A1	GND
A19	GND	B18	GND
A18	RX3-	B17	TX3-
A17	RX3+	B16	TX3+
A16	GND	B15	GND
A15	RX2-	B14	TX2-
A14	RX2+	B13	TX2+
A13	GND	B12	GND
A12	SIDEBAND	B11	SIDEBAND
A11	SIDEBAND	B10	SIDEBAND
A10	SIDEBAND		
A9	SIDEBAND	B9	SIDEBAND
A8	SIDEBAND	B8	SIDEBAND
A7	GND	B7	GND
A6	RX1-	B6	TX1-
A5	RX1+	B5	TX1+
A4	GND	B4	GND
A3	RX0-	B3	TX0-
A2	RX0+	B2	TX0+
A1	GND	B1	GND

11	防尘盖	8087 防尘盖	1	PCS	<table><tr><td>A3</td><td>RX0-</td><td rowspan="3"></td><td>B3</td><td>TX0-</td></tr><tr><td>A2</td><td>RX0+</td><td>B2</td><td>TX0+</td></tr><tr><td>A1</td><td>GND</td><td>B1</td><td>GND</td></tr></table>										A3	RX0-		B3	TX0-	A2	RX0+	B2	TX0+	A1	GND	B1	GND										
A3	RX0-		B3	TX0-																																	
A2	RX0+		B2	TX0+																																	
A1	GND		B1	GND																																	
10	防尘盖	8654 4I 防尘盖	1	PCS																																	
9	弹片	不锈钢弹片	2	PCS																																	
8	网管	PET OD:10mm, 黑色	A/R	M	A		INITIAL RELEASE					26/06/27																									
7	醋酸胶布	W=25±5mm, 黑色	A/R	M	REV		DESCRIPTION OF CHANGE					DATE																									
6	胶料	PBT+20%GF, 黑色	A/R	G	<table><tr><td colspan="3">TOLERANCE</td><td colspan="3" rowspan="4">DIKWAN® 东莞市谿群实业有限公司 DONGGUAN AIQUN INDUSTRIAL CO.,LTD</td></tr><tr><td colspan="3">INCHES MM</td></tr><tr><td>. X</td><td>.015</td><td>.30</td></tr><tr><td>. XX</td><td>.010</td><td>.10</td></tr><tr><td>. XXX</td><td>.005</td><td>.05</td><td>SCALE</td><td>NONE</td><td></td><td>REV</td><td>A</td></tr></table>										TOLERANCE			DIKWAN® 东莞市谿群实业有限公司 DONGGUAN AIQUN INDUSTRIAL CO.,LTD			INCHES MM			. X	.015	.30	. XX	.010	.10	. XXX	.005	.05	SCALE	NONE		REV	A
TOLERANCE			DIKWAN® 东莞市谿群实业有限公司 DONGGUAN AIQUN INDUSTRIAL CO.,LTD																																		
INCHES MM																																					
. X	.015	.30																																			
. XX	.010	.10																																			
. XXX	.005	.05	SCALE	NONE		REV	A																														
5	胶料	LDPE, NATURAL	A/R	G																																	
4	PCB	SAS 8087 PCB, PIN: Au 15U" 100±10 ohm	1	PCS																																	
3	PCB	SLIMSAS 8654 4I PCB, PIN: Au 15U" 88±8 ohm	1	PCS	DRAWN BY		WXF			UNIT		MM				REV		A																			
2	线材	30AWG 电子线 (白/橙/红/白/蓝)	A/R	M	CHECK BY					SHEET		1/1		CUSTOMER:																							
1	线材	30AWG*1P+32AWG*2C, OD:0.95*2.25MM, 100±5 ohm	A/R	M	APPD BY					DATE		26/06/27		DWG NO:																							
NO.	PART NAME	SPEC DESCRIPTION	Q' TY	UNITS	CUSTOMER P/N:						TITLE: SLIMSAS 8654 4i-8087																										
											P/N: 1. AMS910010001																										

DIKWAN® 东莞市莞群实业有限公司
DONGGUAN AIQUN INDUSTRIAL CO.,LTD