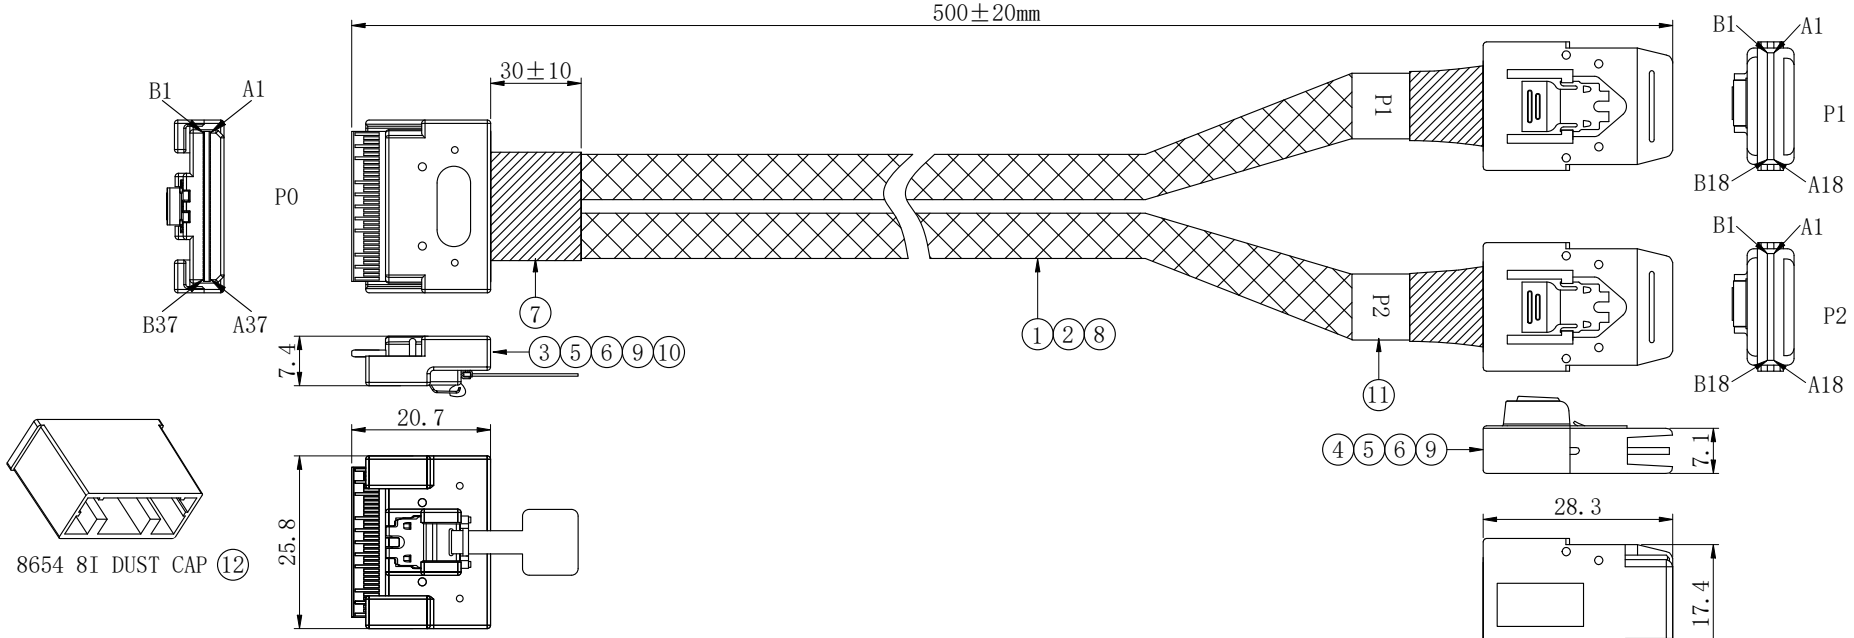


8654 8I DUST CAP (12)

ELECTRICAL CHARACTER:

a. 100% OPEN&SHORT TESTING;

b. WITHSTANDING VOLTAGE:DC 300V 0.01Sec;

c. INSULATION RESISTANCE:10M Ohm(Min);

d. CONDUCTIVE RESISTANCE:2 Ohm (Max).

NO.	PART NAME	SPEC DESCRIPTION	Q'TY	UNITS
13	DUST CAP	8087 DUST CAP	2	PCS
12	DUST CAP	8654 8I DUST CAP	1	PCS
11	LABEL	WHITE SYNTHETIC PAPER LABEL WITH BLACK TEXT "P1/P2"	2	PCS
10	PULL TAB	PULL TAB	1	PCS
9	LATCH	STAINLESS STEEL	3	PCS
8	EXPANDO	PET OD: 10mm, BLACK	A/R	M
7	ACETATE TAPE	W=25±5mm,BLACK	A/R	M
6	MOLDING	PBT+20%GF, BLACK	A/R	G
5	MOLDING	LDPE,NATURAL	A/R	G
4	PCB	SAS 8087 PCB, PIN:Au 15U" 100±10 ohm	2	PCS
3	PCB	SLIMSAS 8654 8I PCB,PIN:Au 15U" 88±8 ohm	1	PCS
2	CABLE	30AWG CABLE(WHITE/ORANGE/RED/WHITE/BLUE)	A/R	M
1	CABLE	32AWG*1P+32AWG*2C, OD0.65*1.54mm,85±5 ohm	A/R	M

8087 DUST CAP (13)

REV	DESCRIPTION OF CHANGE	DATE
A	INITIAL RELEASE	26/08/03

TOLERANCE	INCHES	MM
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05


DRAWN BY	WXF
CHECK BY	
APPD BY	
CUSTOMER P/N:	

OIKWAN® 东莞市蔼群实业有限公司
DONGGUAN AIQUN INDUSTRIAL CO.,LTD

SCALE	NONE	REV	A
UNIT	MM		
SHEET	1/2	CUSTUMER:	
DATE	26/08/03	DWG NO:	

TITLE: SLIMSAS 8654 8I-2*8087

P/N: 1.AMSA1F010001

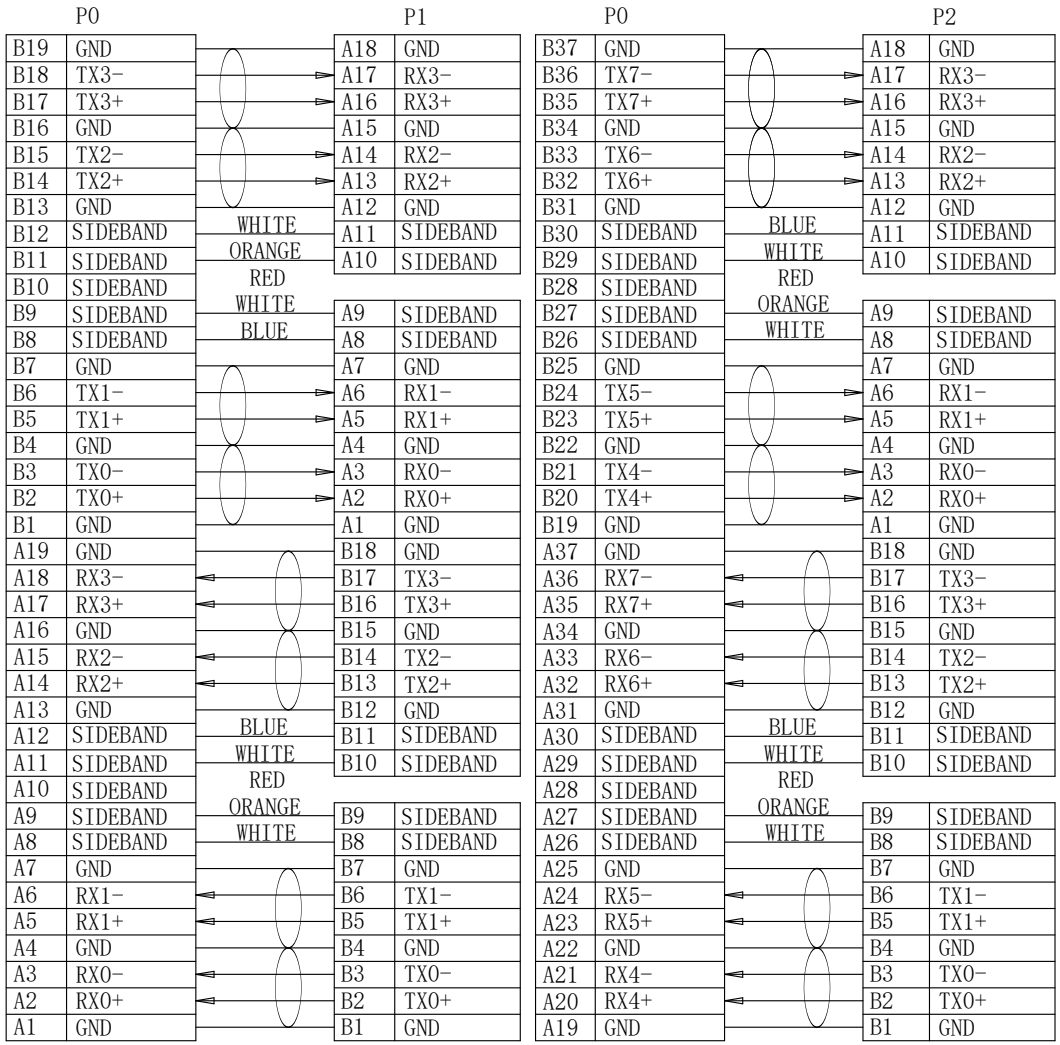

REV	DESCRIPTION OF CHANGE	DATE
A	INITIAL RELEASE	26/08/03

TOLERANCE	INCHES	MM
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05

DRAWN BY	WXF
CHECK BY	
APPD BY	
CUSTOMER P/N:	

OIKWAN® 东莞市蔼群实业有限公司
DONGGUAN AIQUN INDUSTRIAL CO.,LTD

SCALE	NONE	REV	A
UNIT	MM		
SHEET	2/2	CUSTUMER:	
DATE	26/08/03	DWG NO:	

TITLE: SLIMSAS 8654 8I-2*8087

P/N:1.AMSA1F010001