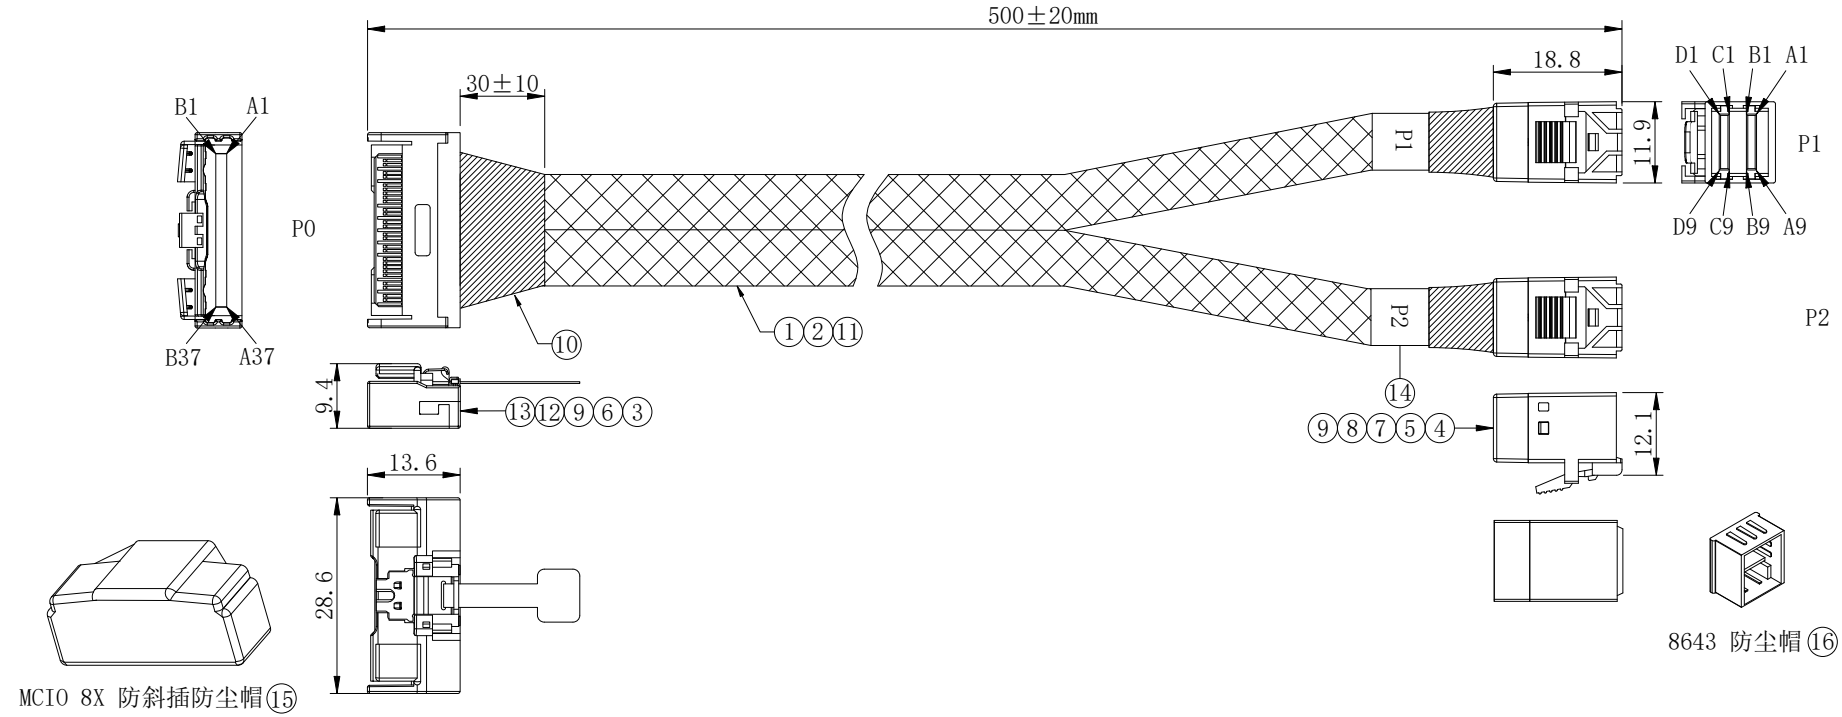


NO.	PART NAME	SPEC DESCRIPTION	Q'TY	UNITS
16	防尘帽	8643 防尘帽	2	PCS
15	防尘帽	MCIO 8X 防斜插防尘帽	1	PCS
14	标签	白底黑字“P1/P2”合成纸	2	PCS
13	拉环	拉环	1	PCS
12	弹片	不锈钢弹片	1	PCS
11	网管	PET OD：10mm,黑色	A/R	M
10	醋酸胶布	W=25±5mm,黑色	A/R	M
9	胶料	PA,黑色	A/R	G
8	外壳	MINISAS HD 4I PC 黑色 后塞壳	2	PCS
7	外壳	MINISAS HD 4I PC 黑色 主体外壳	2	PCS
6	外壳	MCIO 8X PA66+20%GF 黑色防斜插外壳	1	PCS
5	PCB	MINISAS HD 4I PCB(C/D), PIN:Au 15U″ 100±10 ohm	2	PCS
4	PCB	MINISAS HD 4I PCB(A/B), PIN:Au 15U″ 100±10 ohm	2	PCS
3	PCB	MCIO 8X PCB, PIN:Au 15U″, 88±8 ohm	1	PCS
2	线材	30AWG 电子线(白/橙/红/白/蓝)(棕/黄/灰/紫/绿)	A/R	M
1	线材	30AWG*1P+34AWG*2C OD:0.8*1.76, 85±5 ohm	A/R	M

电气特性：
1.100%开路、短路、断路测试。
2.绝缘阻抗：10M Ohm Min
3.导通阻抗：2 Ohm MAX
4.耐压：DC 300V,0.01/Sec


REV	DESCRIPTION OF CHANGE	DATE
A	INITIAL RELEASE	26/08/06

TOLERANCE	INCHES	MM
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05

OIKWAN® 东莞市蔼群实业有限公司
DONGGUAN AIQUN INDUSTRIAL CO.,LTD

DRAWN BY	WXF	SCALE	NONE
CHECK BY		UNIT	MM
APPD BY		SHEET	1/2
CUSTOMER P/N:		DATE	26/08/06

REV A
CUSTUMER:
DWG NO:
TITLE:MCIO 8X 防斜插-2*8643
P/N:1.AMSE3F010002

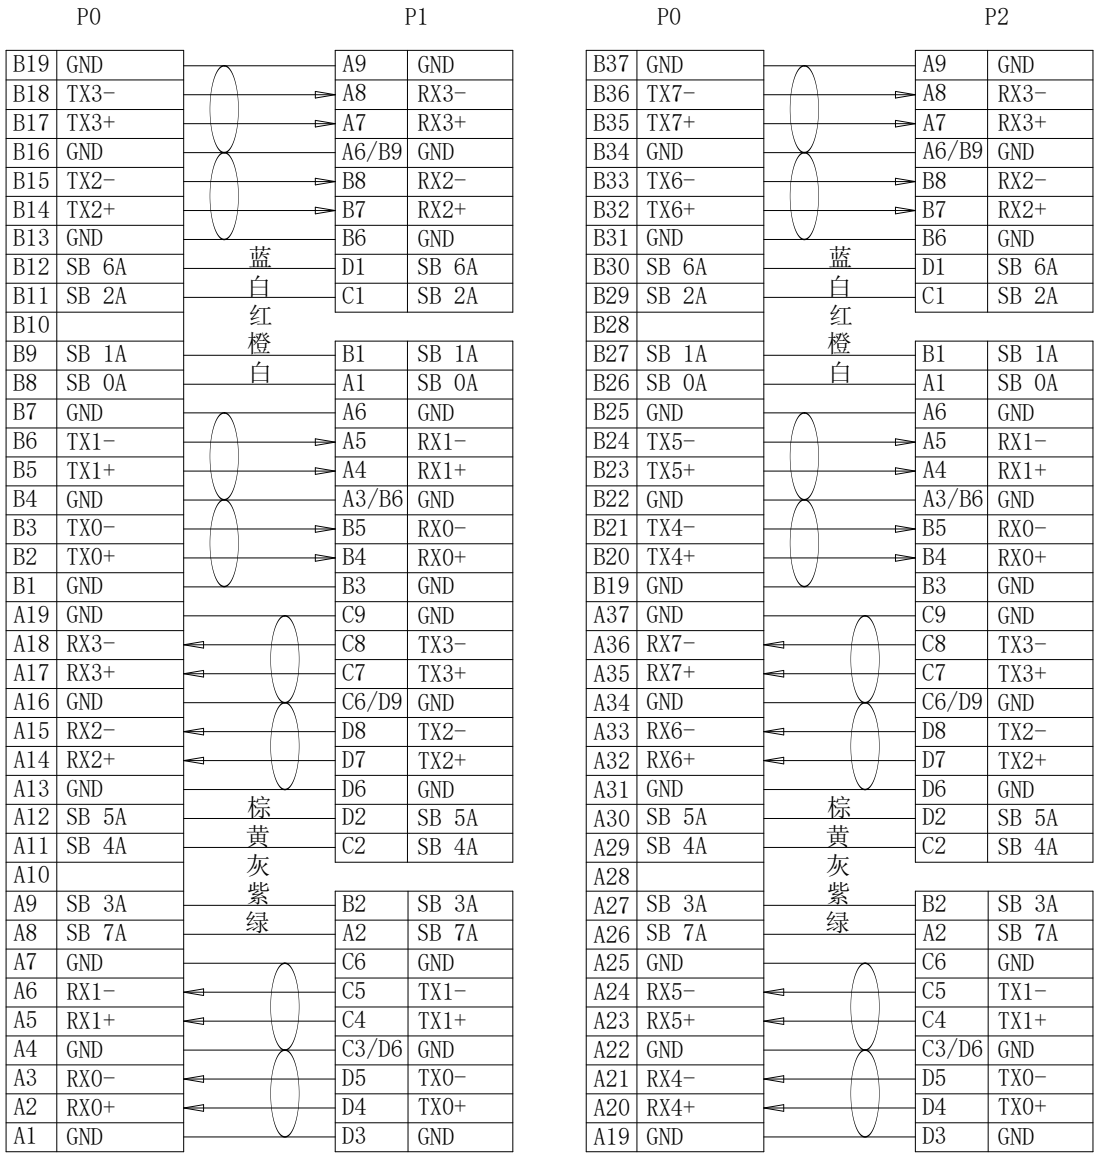

REV	DESCRIPTION OF CHANGE	DATE
A	INITIAL RELEASE	26/08/06

TOLERANCE	INCHES	MM
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05

DRAWN BY	WXF
CHECK BY	
APPD BY	
CUSTOMER P/N:	

OIKWAN® 东莞市蔼群实业有限公司
DONGGUAN AIQUN INDUSTRIAL CO.,LTD

SCALE	NONE	REV	A
UNIT	MM		
SHEET	2/2	CUSTUMER:	
DATE	26/08/06	DWG NO:	

TITLE:MCIO 8X防斜插-2*8643

P/N:1.AMSE3F010002