

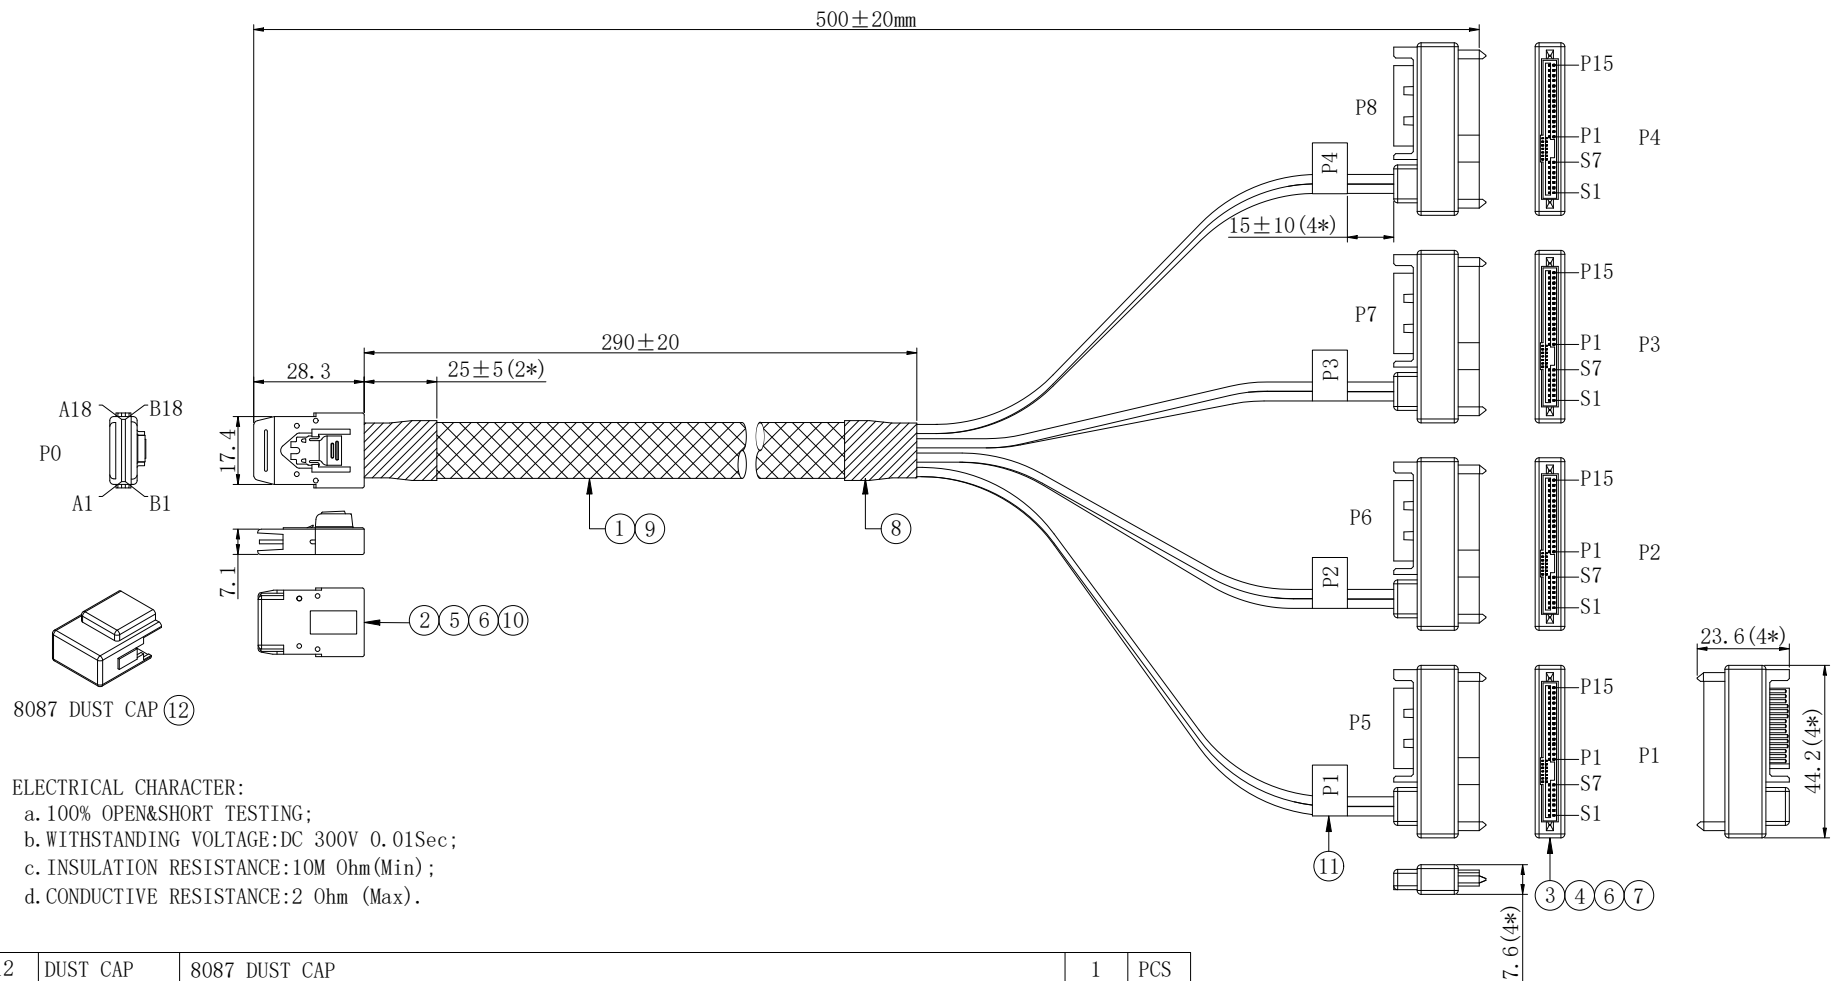




ELECTRICAL CHARACTER:
a. 100% OPEN&SHORT TESTING;
b. WITHSTANDING VOLTAGE:DC 300V 0.01Sec;
c. INSULATION RESISTANCE:10M Ohm (Min);
d. CONDUCTIVE RESISTANCE:2 Ohm (Max).

12	DUST CAP	8087 DUST CAP	1	PCS	7.6											
11	LABEL	WHITE SYNTHETIC PAPER LABEL WITH BLACK TEXT“P1&P2&P3&P4”	4	PCS												
10	LATCH	STAINLESS STEEL	1	PCS												
9	EXPANDO	PET OD: 10mm, BLACK	A/R	M		A	INITIAL RELEASE					26/06/11				
8	ACETATE TAPE	W=25±5mm, BLACK	A/R	M		REV	DESCRIPTION OF CHANGE					DATE				
7	MOLDING	45P PVC BLACK	A/R	G		TOLERANCE			DIKWAN® 东莞市莞群实业有限公司 DONGGUAN AIQUN INDUSTRIAL CO.,LTD							
6	MOLDING	LDPE, NATURAL	A/R	G		INCHES										
						MM										
5	MOLDING	PBT+20%GF, BLACK	A/R	G		.X	.015	.30	SCALE		NONE			REV	A	
4	CONNECTOR	SATA 15P/M G/F BLACK	4	PCS		.XX	.010	.10	UNIT	MM						
3	CONNECTOR	SAS 29P/F, PIN:G/F	4	PCS		.XXX	.005	.05	DRAWN BY		WXF		CUSTOMER:			
2	PCB	SAS 8087 PCB, PIN: Au 15U” 100±10 ohm	1	PCS					CHECK BY				DWG NO:			
1	CABLE	30AWG*1P+32AWG*2C, OD:0.95*2.25MM, 100±5 ohm	A/R	M					APPD BY				TITLE:MINISAS 8087-4*8482+15P ALL-IN-ONE			
NO.	PART NAME	SPEC DESCRIPTION	QT'Y	UNIT		CUSTOMER P/N:			P/N: 1. AMS150Y10001							

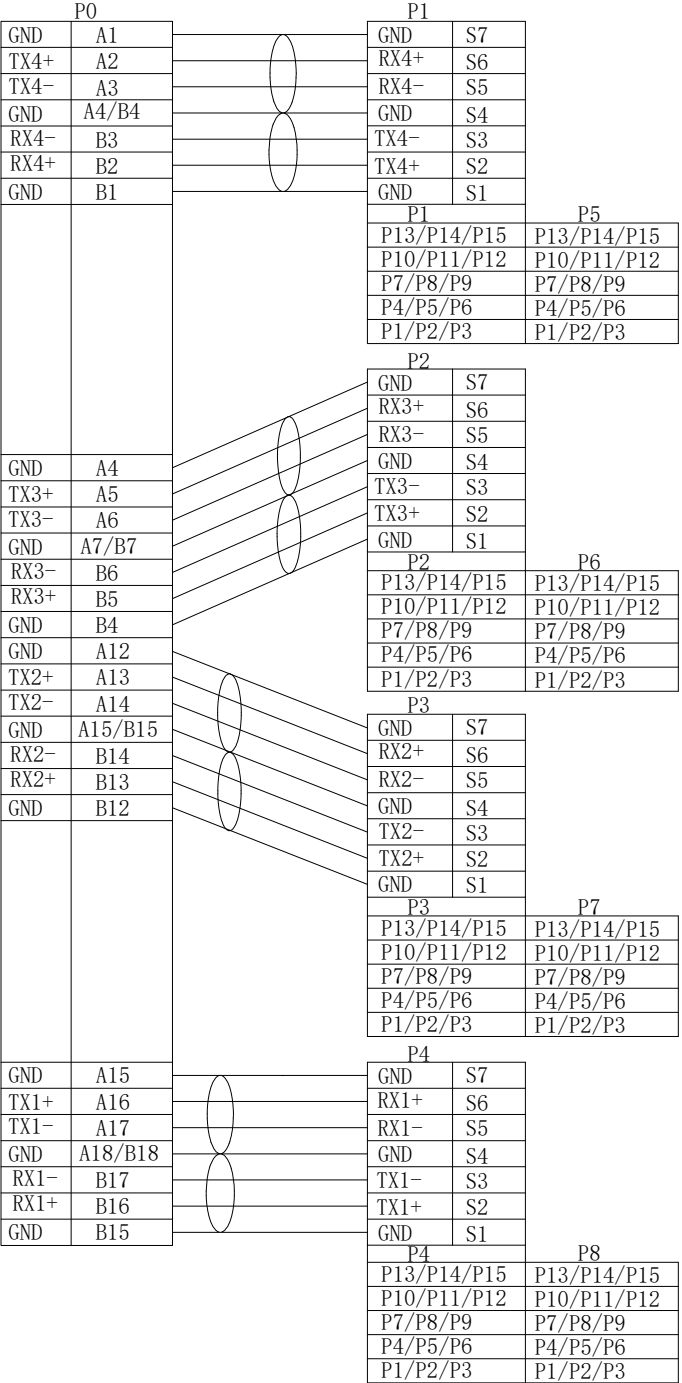

A	INITIAL RELEASE					26/06/11			
REV	DESCRIPTION OF CHANGE					DATE			
TOLERANCE			DIKWAN® 东莞市蔼群实业有限公司 DONGGUAN AIQUN INDUSTRIAL CO.,LTD						
INCHES		MM							
. X	. 015	. 30							
. XX	. 010	. 10							
. XXX	. 005	. 05	SCALE	NONE		REV	A		
DRAWN BY		WXF	UNIT	MM					
CHECK BY			SHEET	2/2	CUSTOMER:				
APPD BY			DATE	26/06/11	DWG NO:				
			TITLE:MINISAS 8087-4*8482+15P ALL-IN-ONE						
CUSTOMER P/N:			P/N: 1. AMS150Y10001						