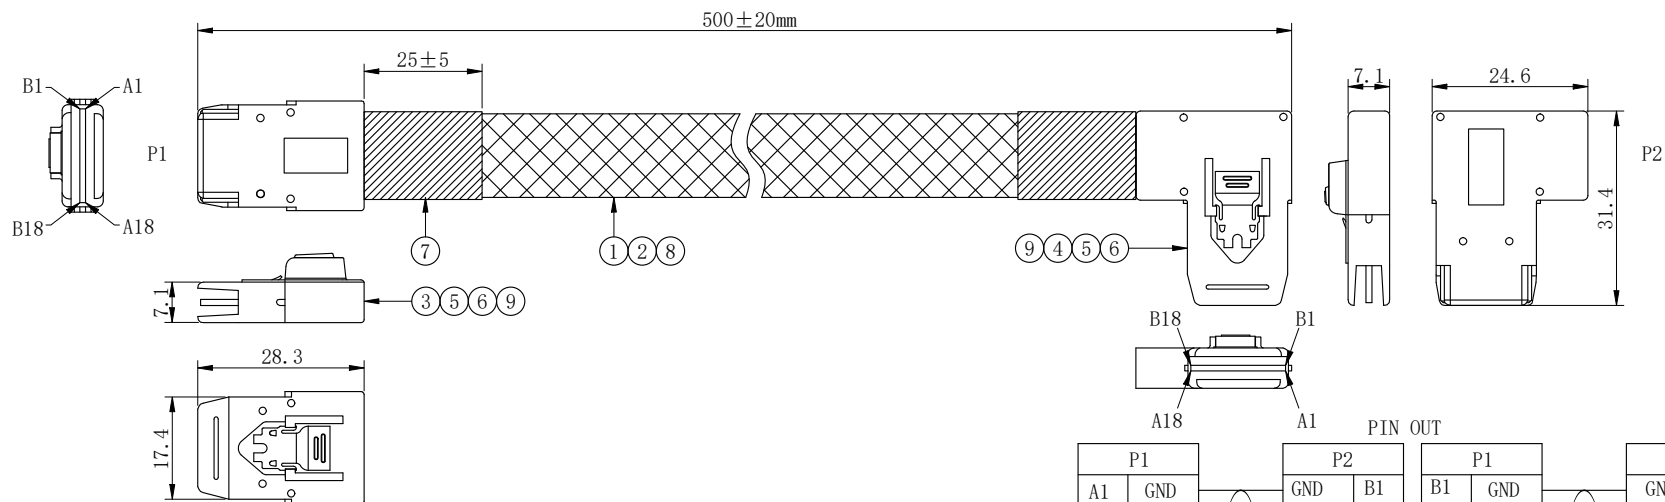



8087 DUST CAP ⑩

ELECTRICAL CHARACTER:

- 100% OPEN&SHORT TESTING;
- WITHSTANDING VOLTAGE:DC 300V 0.01Sec;
- INSULATION RESISTANCE:10M Ohm(Min);
- CONDUCTIVE RESISTANCE:2 Ohm (Max).

10	DUST CAP	8087 DUST CAP	2	PCS
9	LATCH	STAINLESS STEEL	2	PCS
8	EXPANDO	PET OD: 10mm, BLACK	A/R	M
7	ACETATE TAPE	W=25±5mm, BALCK	A/R	M
6	MOLDING	LDPE, NATURAL	A/R	G
5	MOLDING	PBT+20%GF, BALCK	A/R	G
4	PCB	SAS 8087 SIDE EXIT PCB, PIN: Au 15U" 100±10 ohm	1	PCS
3	PCB	SAS 8087 PCB, PIN: Au 15U" 100±10 ohm	1	PCS
2	CABLE	30AWG CABLE (WHITE/ORANGE/WHITE/BLUE)	A/R	M
1	CABLE	30AWG*1P+32AWG*2C, OD: 0.95*2.25MM, 100±5 ohm	A/R	M
NO.	PART NAME	SPEC DESCRIPTION	QT'Y	UNIT

P1		P2		P1		P2	
A1	GND	GND	B1	B1	GND	GND	A1
A2	RX1+	TX1+	B2	B2	RX1+	TX1+	A2
A3	RX1-	TX1-	B3	B3	RX1-	TX1-	A3
A4	GND	GND	B4	B4	GND	GND	A4
A5	RX2+	TX2+	B5	B5	RX2+	TX2+	A5
A6	RX2-	TX2-	B6	B6	RX2-	TX2-	A6
A7	GND	GND	B7	B7	GND	GND	A7
A8	SB	BLUE	B8	B8	SB	WHITE	A8
A9	SB	WHITE	B9	B9	SB	ORANGE	A9
A10	SB	ORANGE	B10	B10	SB	WHITE	A10
A11	SB	WHITE	B11	B11	SB	BLUE	A11
A12	GND	GND	B12	B12	GND	GND	A12
A13	RX3+	TX3+	B13	B13	RX3+	TX3+	A13
A14	RX3-	TX3-	B14	B14	RX3-	TX3-	A14
A15	GND	GND	B15	B15	GND	GND	A15
A16	RX4+	TX4+	B16	B16	RX4+	TX4+	A16
A17	RX4-	TX4-	B17	B17	RX4-	TX4-	A17
A18	GND	GND	B18	B18	GND	GND	A18

A	INITIAL RELEASE				26/06/25		
REV	DESCRIPTION OF CHANGE				DATE		
TOLERANCE			DIKWAN® 东莞市莞群实业有限公司 DONGGUAN AIQUN INDUSTRIAL CO.,LTD				
INCHES		MM					
. X	. 015	. 30					
. XX	. 010	. 10					
. XXX	. 005	. 05					
DRAWN BY	WXF		SCALE	NONE		REV	A
			UNIT	MM			
CHECK BY			SHEET	1/1	CUSTOMER:		
APPD BY			DATE	26/06/25	DWG NO:		
			TITLE: 8087-8087 LEFT TURN				
CUSTOMER P/N:			P/N: 1.AMS110310005				