



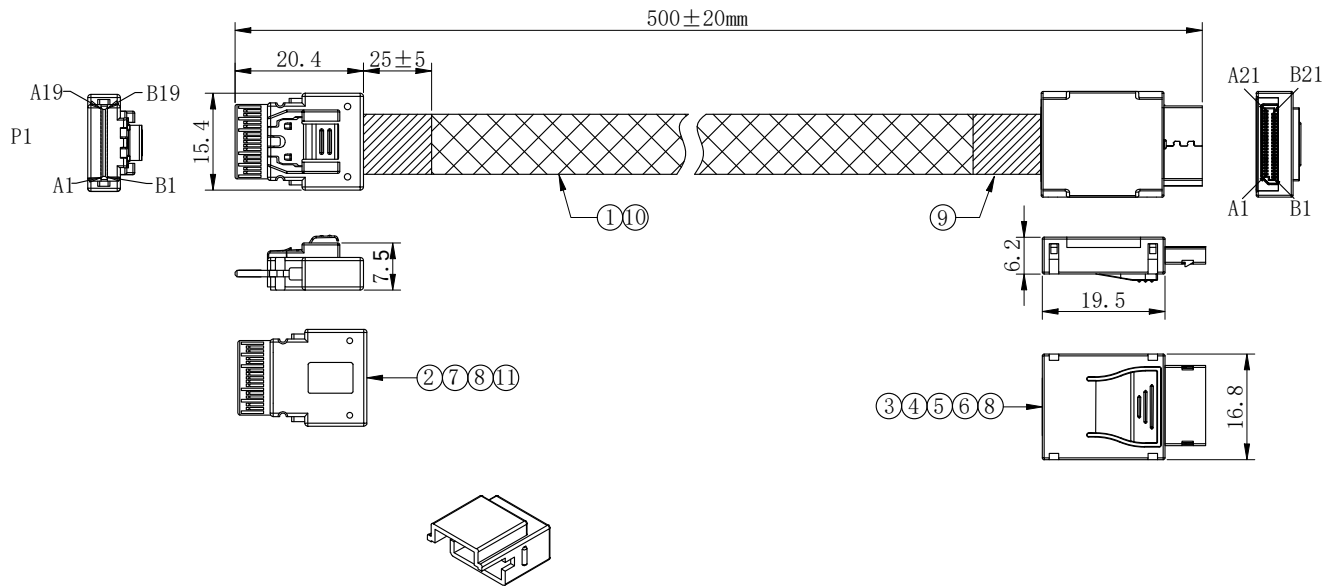

电气特性:
1. 100%开路、短路、断路测试。
2. 绝缘阻抗: 10M Ohm Min
3. 导通阻抗: 2 Ohm MAX
4. 耐压: DC 300V, 0.01/Sec

8654 4I 防尘帽⑫

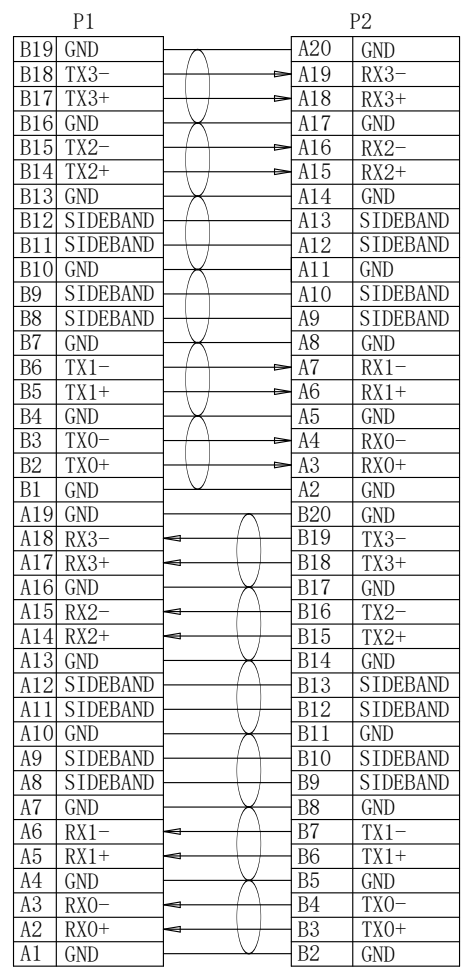

12	防尘帽	8654 4I 防尘帽	1	PCS
11	弹片	不锈钢弹片	1	PCS
10	网管	PET OD: 10mm, 黑色	A/R	M
9	醋酸胶布	W=25±5mm, 黑色	A/R	M
8	胶料	LDPE, NATURAL	A/R	G
7	胶料	PBT+20%GF, 黑色	A/R	G
6	外壳	OCULINK 4I 顶盖 PA66, 黑色	1	PCS
5	外壳	OCULINK 4I 下盖 PA66, 黑色	1	PCS
4	连接器	OCULINK 4I CONN	1	PCS
3	PCB	OCULINK 4I PCB 88±8 ohm	1	PCS
2	PCB	SLIMSAS 8654 4I PCB, PIN: Au 15U" 88±8 ohm	1	PCS
1	线材	32AWG*1P+32AWG*2C, OD0.65*1.54mm, 85±5 ohm	A/R	M
NO.	PART NAME	SPEC DESCRIPTION	QT'Y	UNIT

A	INITIAL RELEASE			26/06/27				
REV	DESCRIPTION OF CHANGE			DATE				
TOLERANCE			DIKWAN® 东 莞 市 蔼 群 实 业 有 限 公 司 DONGGUAN AIQUN INDUSTRIAL CO.,LTD					
INCHES MM								
. X	. 015	. 30						
. XX	. 010	. 10						
. XXX	. 005	. 05	SCALE	NONE		REV	A	
DRAWN BY WXF			UNIT	MM				
CHECK BY			SHEET	1/1	CUSTOMER:			
APPD BY			DATE	26/06/27	DWG NO:			
CUSTOMER P/N:			TITLE: SLIMSAS 8654 4I-8611					
			P/N: 1. AMS980010010					