
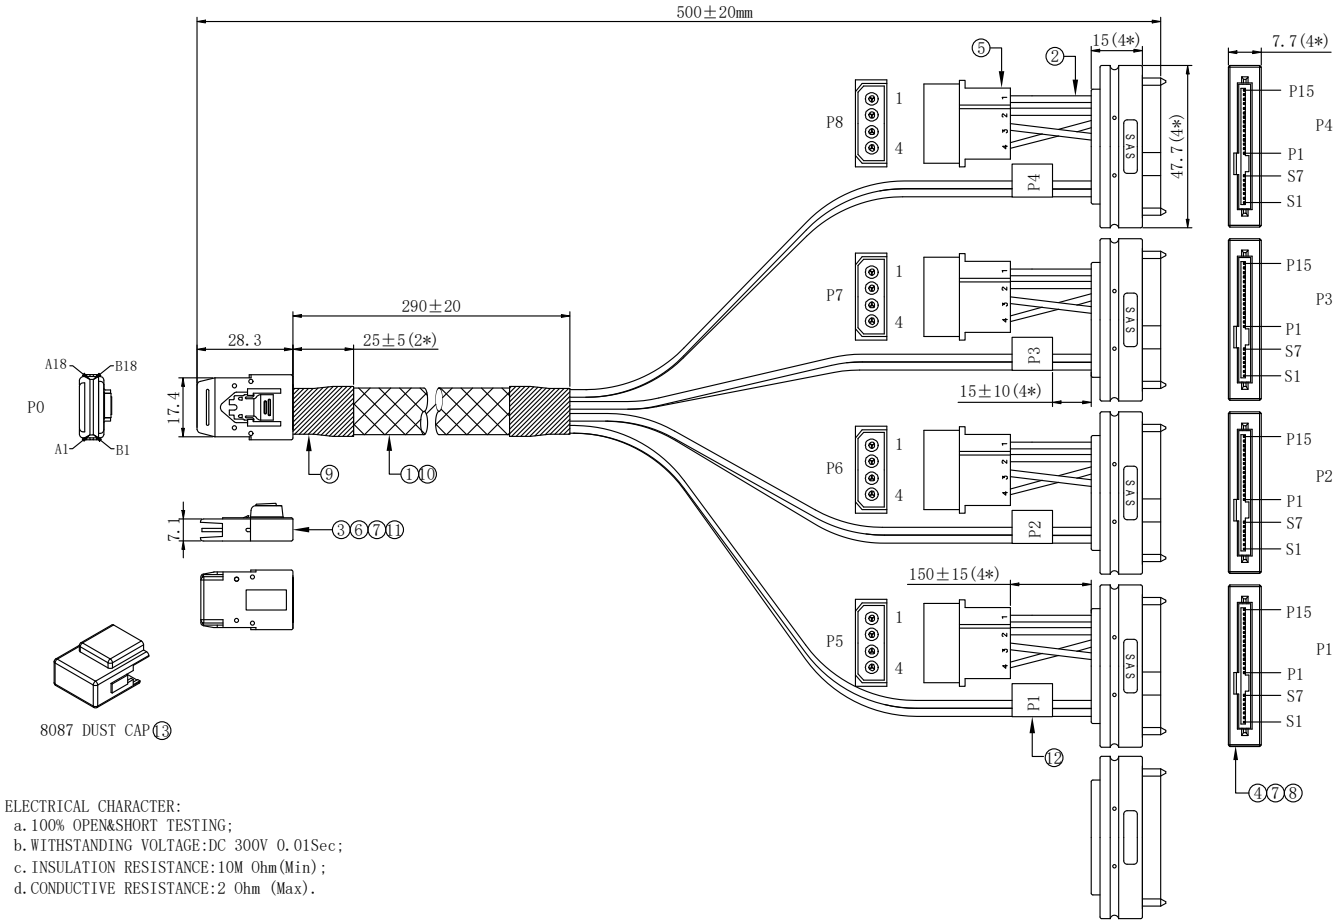


PIN ASSIGNMENT:

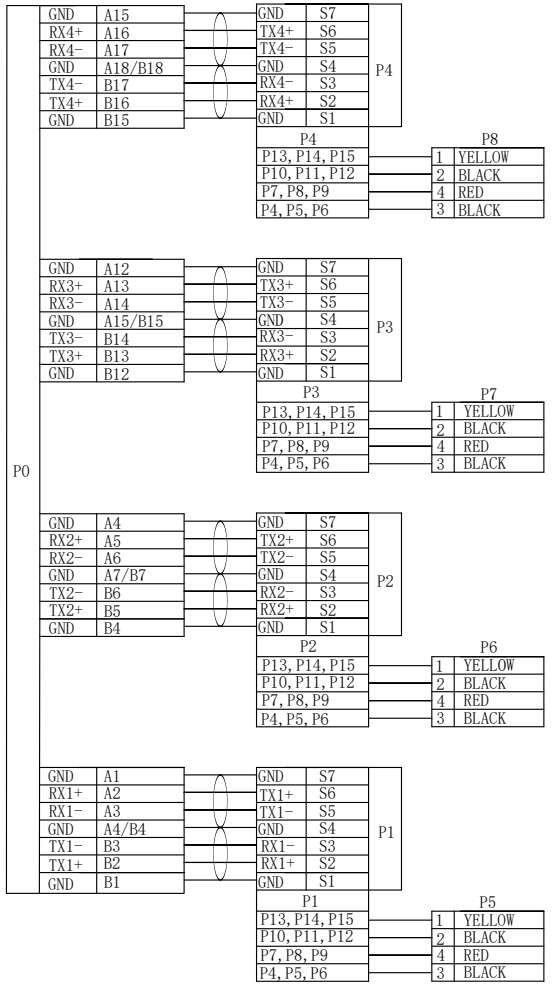

ELECTRICAL CHARACTER:
a. 100% OPEN&SHORT TESTING;
b. WITHSTANDING VOLTAGE:DC 300V 0.01Sec;
c. INSULATION RESISTANCE:10M Ohm(Min);
d. CONDUCTIVE RESISTANCE:2 Ohm (Max).

NO.	PART NAME	SPEC DESCRIPTION	QT'Y	UNIT
13	DUST CAP	8087 DUST CAP	1	PCS
12	LABEL	WHITE SYNTHETIC PAPER LABEL WITH BLACK TEXT "P1&P2&P3&P4"	4	PCS
11	LATCH	STAINLESS STEEL	1	PCS
10	EXPANDO	PET OD: 10mm, BLACK	A/R	M
9	ACETATE TAPE	W=25±5mm, BLACK	A/R	M
8	MOLDING	45P PVC BLACK	A/R	G
7	MOLDING	LDPE, NATURAL	A/R	G
6	MOLDING	PBT+20%GF, BLACK	A/R	G
5	CONNECTOR	4P, NATURAL, PH5.08, PIN:G/F	4	PCS
4	CONNECTOR	SAS 29P/F, PIN:G/F	4	PCS
3	PCBA	MINISAS 8087 PCB, PIN:Au 15U" 100±10 ohm	1	PCS
2	CABLE	20AWG CABLE(YELLOW/BLACK/RED/BLACK)	A/R	M
1	CABLE	30AWG*1P+32AWG*2C, OD:0.95*2.25MM, 100±5 ohm	A/R	M

REV	DESCRIPTION OF CHANGE	DATE
A	INITIAL RELEASE	26/06/11

TOLERANCE	INCHES	MM
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05

DRAWN BY	WXF
CHECK BY	
APPD BY	
CUSTOMER P/N:	

OIKWAN® 东莞市蔼群实业有限公司
DONGGUAN AIQUN INDUSTRIAL CO.,LTD

SCALE	NONE	REV	A
UNIT	MM		
SHEET	1/1	CUSTUMER:	
DATE	26/06/11	DWG NO:	

TITLE: MINISAS 8087-4*8482+4P

P/N: 1.AMS150P10001