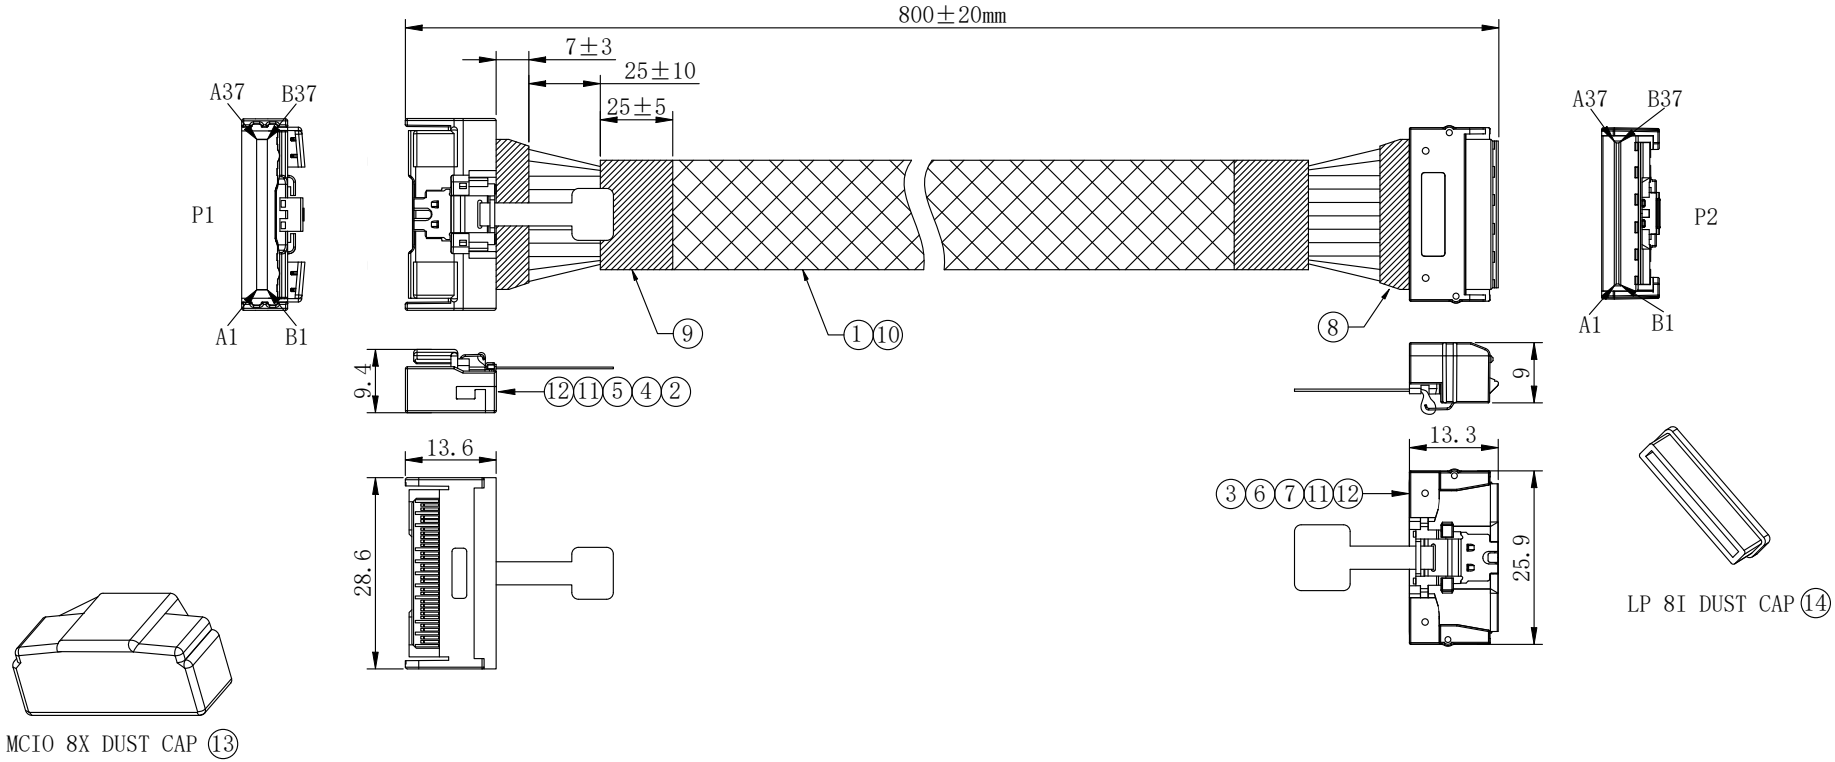


NO.	PART NAME	SPEC DESCRIPTION	QT'Y	UNIT
14	DUST CAP	LP 8I DUST CAP	1	PCS
13	DUST CAP	MCIO 8X DUST CAP	1	PCS
12	PULL TAB	PULL TAB	2	PCS
11	LATCH	STAINLESS STEEL	2	PCS
10	BRAIDED SLEEVING	PET OD: 10mm, BLACK	A/R	M
9	ACETATE TAPE	W=25±5mm, BLACK	A/R	M
8	ACETATE TAPE	W=10±3mm, BLACK	A/R	M
7	MOLDING	LDPE, NATURAL	A/R	G
6	MOLDING	PBT+20%GF, BLACK	A/R	G
5	MOLDING	PA, BLACK	A/R	G
4	HOUSING	MCIO 8X PA66+20%GF BLACK ANTI-SKEW HOUSING	1	PCS
3	PCB	LP SLIMSAS 8I PCB, PIN:Au 15U", 88±8 ohm	1	PCS
2	PCB	MCIO 8X PCB, PIN:Au 15U", 88±8 ohm	1	PCS
1	CABLE	30AWG*1P+34AWG*2C OD:0.8*1.76, 85±5 ohm	A/R	M

ELECTRICAL CHARACTER:
a. 100% OPEN&SHORT TESTING;
b. WITHSTANDING VOLTAGE:DC 300V 0.01Sec;
c. INSULATION RESISTANCE:10M Ohm(Min);
d. CONDUCTIVE RESISTANCE:2 Ohm (Max).

REV	DESCRIPTION OF CHANGE	DATE
A	INITIAL RELEASE	26/08/06

TOLERANCE	INCHES	MM
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05


DRAWN BY	WXF
CHECK BY	
APPD BY	
CUSTOMER P/N:	

OIKWAN® 东莞市蔼群实业有限公司
DONGGUAN AIQUN INDUSTRIAL CO.,LTD

SCALE	NONE	REV	A
UNIT	MM		
SHEET	1/2	CUSTUMER:	
DATE	26/08/06	DWG NO:	

TITLE: MCIO 8X-LP 8I

P/N:1.AMSDE0F10003

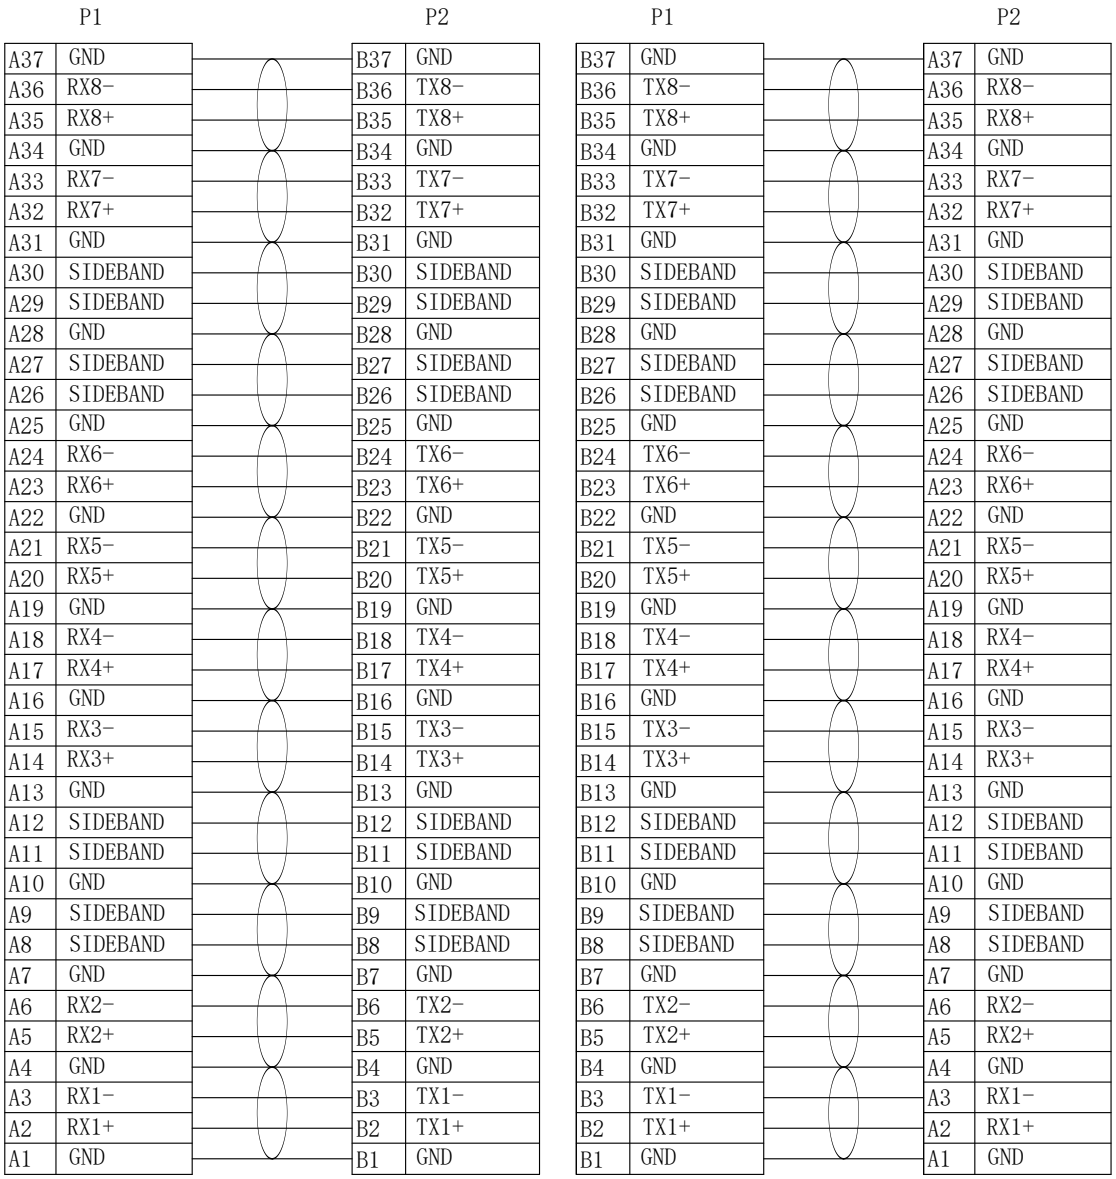

REV	DESCRIPTION OF CHANGE	DATE
A	INITIAL RELEASE	26/08/06

TOLERANCE	INCHES	MM
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05

DRAWN BY	WXF
CHECK BY	
APPD BY	
CUSTOMER P/N:	

OIKWAN® 东莞市蔼群实业有限公司
DONGGUAN AIQUN INDUSTRIAL CO.,LTD

SCALE	NONE	REV	A
UNIT	MM		
SHEET	2/2	CUSTUMER:	
DATE	26/08/06	DWG NO:	

TITLE: MCIO 8X-LP 8I

P/N:1.AMSDE0F10003