


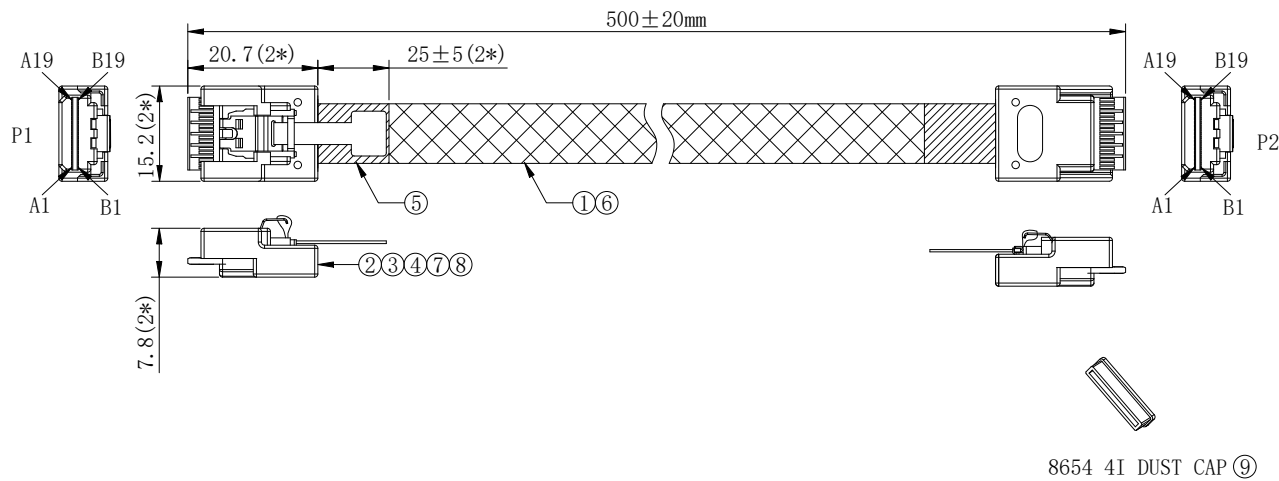

ELECTRICAL CHARACTER:

- 100% OPEN&SHORT TESTING;
- WITHSTANDING VOLTAGE:DC 300V 0.01Sec;
- INSULATION RESISTANCE:10M Ohm (Min);
- CONDUCTIVE RESISTANCE:2 Ohm (Max).

P1			P2	
B19	GND		A19	GND
B18	TX3-		A18	RX3-
B17	TX3+		A17	RX3+
B16	GND		A16	GND
B15	TX2-		A15	RX2-
B14	TX2+		A14	RX2+
B13	GND		A13	GND
B12	SIDEBAND		A12	SIDEBAND
B11	SIDEBAND		A11	SIDEBAND
B10	GND		A10	GND
B9	SIDEBAND		A9	SIDEBAND
B8	SIDEBAND		A8	SIDEBAND
B7	GND		A7	GND
B6	TX1-		A6	RX1-
B5	TX1+		A5	RX1+
B4	GND		A4	GND
B3	TX0-		A3	RX0-
B2	TX0+		A2	RX0+
B1	GND		A1	GND
A19	GND		B19	GND
A18	RX3-		B18	TX3-
A17	RX3+		B17	TX3+
A16	GND		B16	GND
A15	RX2-		B15	TX2-
A14	RX2+		B14	TX2+
A13	GND		B13	GND
A12	SIDEBAND		B12	SIDEBAND
A11	SIDEBAND		B11	SIDEBAND
A10	GND		B10	GND
A9	SIDEBAND		B9	SIDEBAND
A8	SIDEBAND		B8	SIDEBAND
A7	GND		B7	GND
A6	RX1-		B6	TX1-
A5	RX1+		B5	TX1+
A4	GND		B4	GND
A3	RX0-		B3	TX0-
A2	RX0+		B2	TX0+
A1	GND		B1	GND

9	DUST CAP	8654 4I DUST CAP	2	PCS													
8	PULL TAB	PULL TAB	2	PCS	A	INITIAL RELEASE							26/08/04				
7	LATCH	STAINLESS STEEL	2	PCS	REV	DESCRIPTION OF CHANGE							DATE				
6	EXPANDO	PET OD:10mm, BLACK	A/R	M	TOLERANCE			DIKWAN® 东莞市蔼群实业有限公司 DONGGUAN AIQUN INDUSTRIAL CO.,LTD									
5	ACETATE TAPE	W=25±5mm, BLACK	A/R	M	INCHES												
4	MOLDING	PBT+20%GF BLACK	A/R	G	MM												
3	MOLDING	LDPE, NATURAL	A/R	G													
2	PCB	SLIMSAS 8654 4I PCB, PIN: Au 15U" 88±8 ohm	2	PCS	. X			.015	.30	SCALE				NONE		REV	A
1	CABLE	32AWG*1P+32AWG*2C, ODO. 65*1.54mm, 85±5 ohm	A/R	M	. XX			.010	.10					UNIT			
NO.	PART NAME	SPEC DESCRIPTION	Q' TY	UNITS	DRAWN BY			WXF		SHEET		1/1		CUSTOMER:			
					CHECK BY					DATE		26/08/04		DWG NO:			
					APPD BY					TITLE: SLIMSAS 8654 4I-4I							
					CUSTOMER P/N:					P/N: 1. AMS99FF10002							