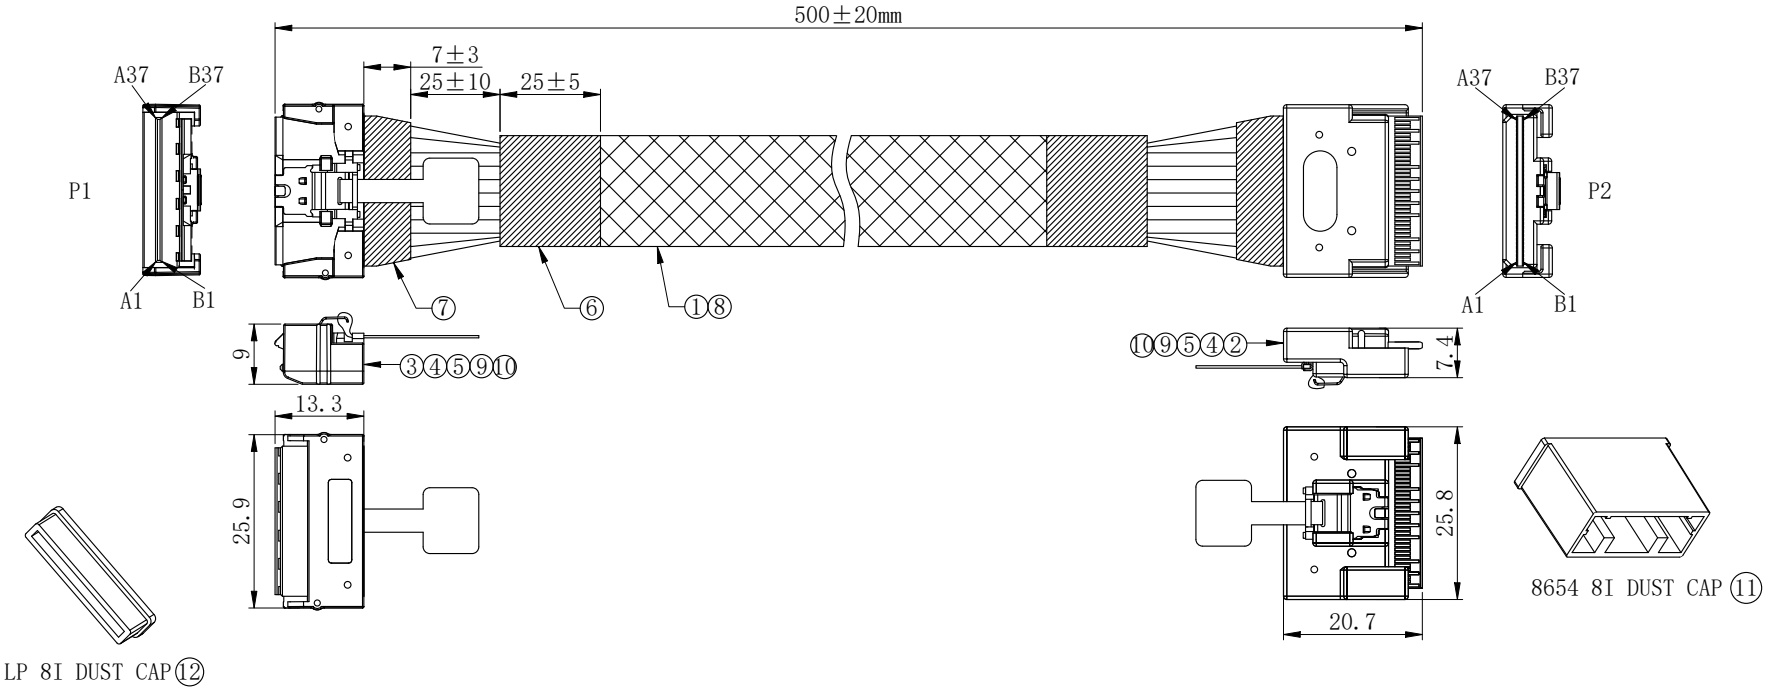


NO.	PART NAME	SPEC DESCRIPTION	QT'Y	UNIT
12	DUST CAP	LP 8I DUST CAP	1	PCS
11	DUST CAP	8654 8I DUST CAP	1	PCS
10	PULL TAB	PULL TAB	2	PCS
9	LATCH	STAINLESS STEEL	2	PCS
8	BRAIDED SLEEVING	PET OD:10mm, BLACK	A/R	M
7	ACETATE TAPE	W=7±3mm,BLACK	A/R	M
6	ACETATE TAPE	W=25±5mm,BLACK	A/R	M
5	MOLDING	PBT+20%GF,BLACK	A/R	G
4	MOLDING	LDPE,NATURAL	A/R	G
3	PCB	LP SLIMSAS 8I PCB, PIN:Au 15U" 88±8 ohm	1	PCS
2	PCB	SLIMSAS 8654 8I PCB,PIN:Au 15U" 88±8 ohm	1	PCS
1	CABLE	32AWG*1P+32AWG*2C, OD0.65*1.54mm,85±5 ohm	A/R	M

ELECTRICAL CHARACTER:
a. 100% OPEN&SHORT TESTING;
b. WITHSTANDING VOLTAGE:DC 300V 0.01Sec;
c. INSULATION RESISTANCE:10M Ohm(Min);
d. CONDUCTIVE RESISTANCE:2 Ohm (Max).

REV	DESCRIPTION OF CHANGE	DATE
A	INITIAL RELEASE	26/08/05

TOLERANCE	INCHES	MM
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05


DRAWN BY	WXF
CHECK BY	
APPD BY	
CUSTOMER P/N:	

OIKWAN® 东莞市蔼群实业有限公司
DONGGUAN AIQUN INDUSTRIAL CO.,LTD

SCALE	NONE	REV	A
UNIT	MM		
SHEET	1/2	CUSTUMER:	
DATE	26/08/05	DWG NO:	

TITLE: LP 8I-8654 8I

P/N: 1.AMSDA0F10003

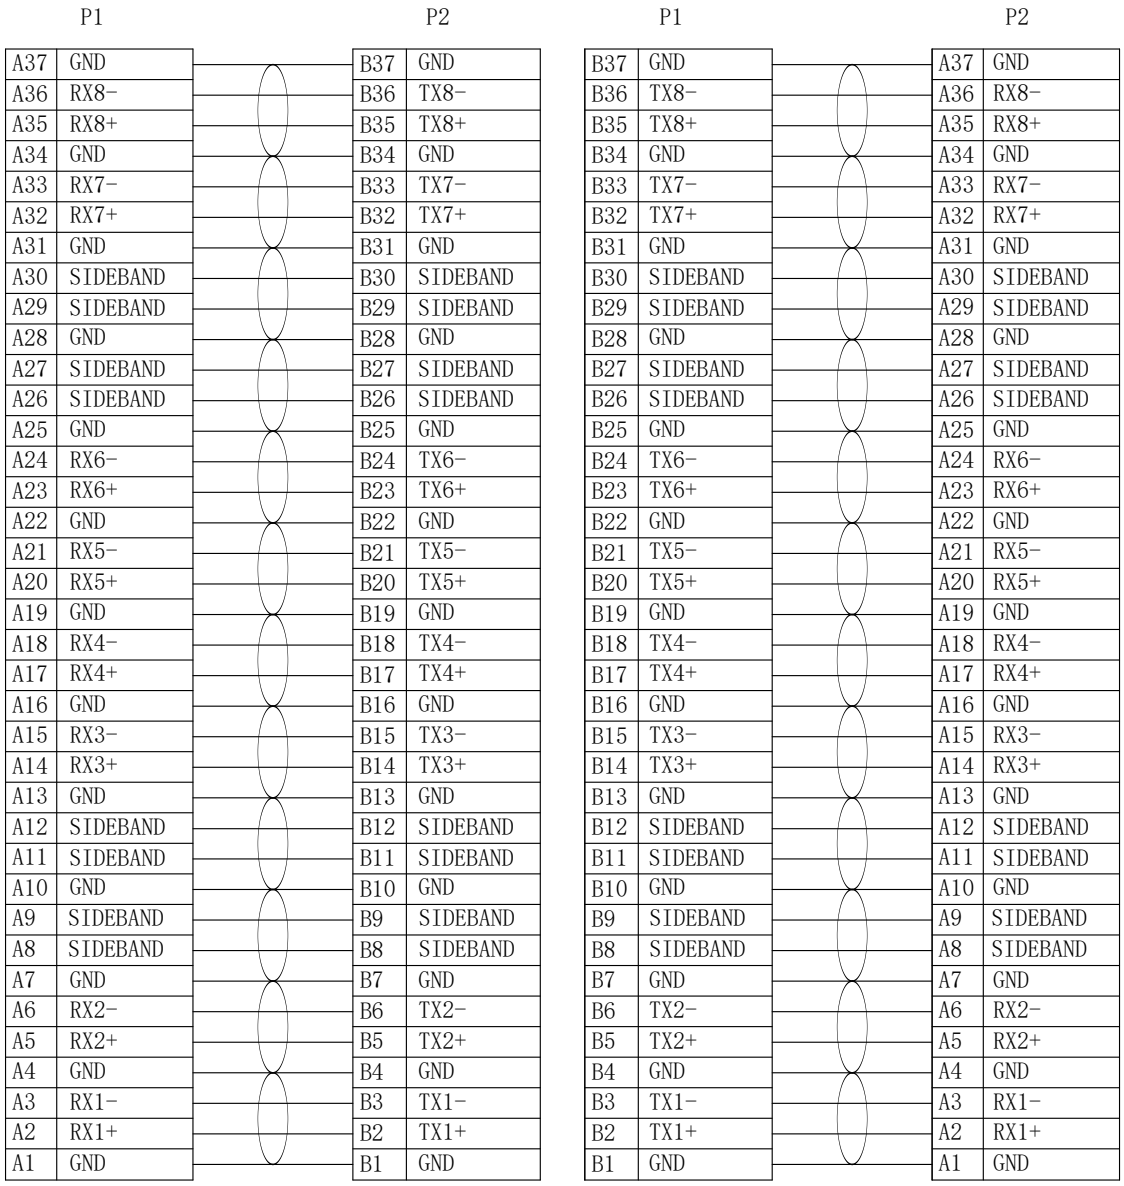

REV	DESCRIPTION OF CHANGE	DATE
A	INITIAL RELEASE	26/08/05

TOLERANCE	INCHES	MM
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05

DRAWN BY: WXF
CHECK BY:
APPD BY:
CUSTOMER P/N:

OIKWAN® 东莞市鸿群实业有限公司
DONGGUAN AIQUN INDUSTRIAL CO.,LTD

SCALE	NONE	REV	A
UNIT	MM		
SHEET	2/2	CUSTUMER:	
DATE	26/08/05	DWG NO:	

TITLE: LP 8I-8654 8I
P/N: 1.AMSDAOF10003