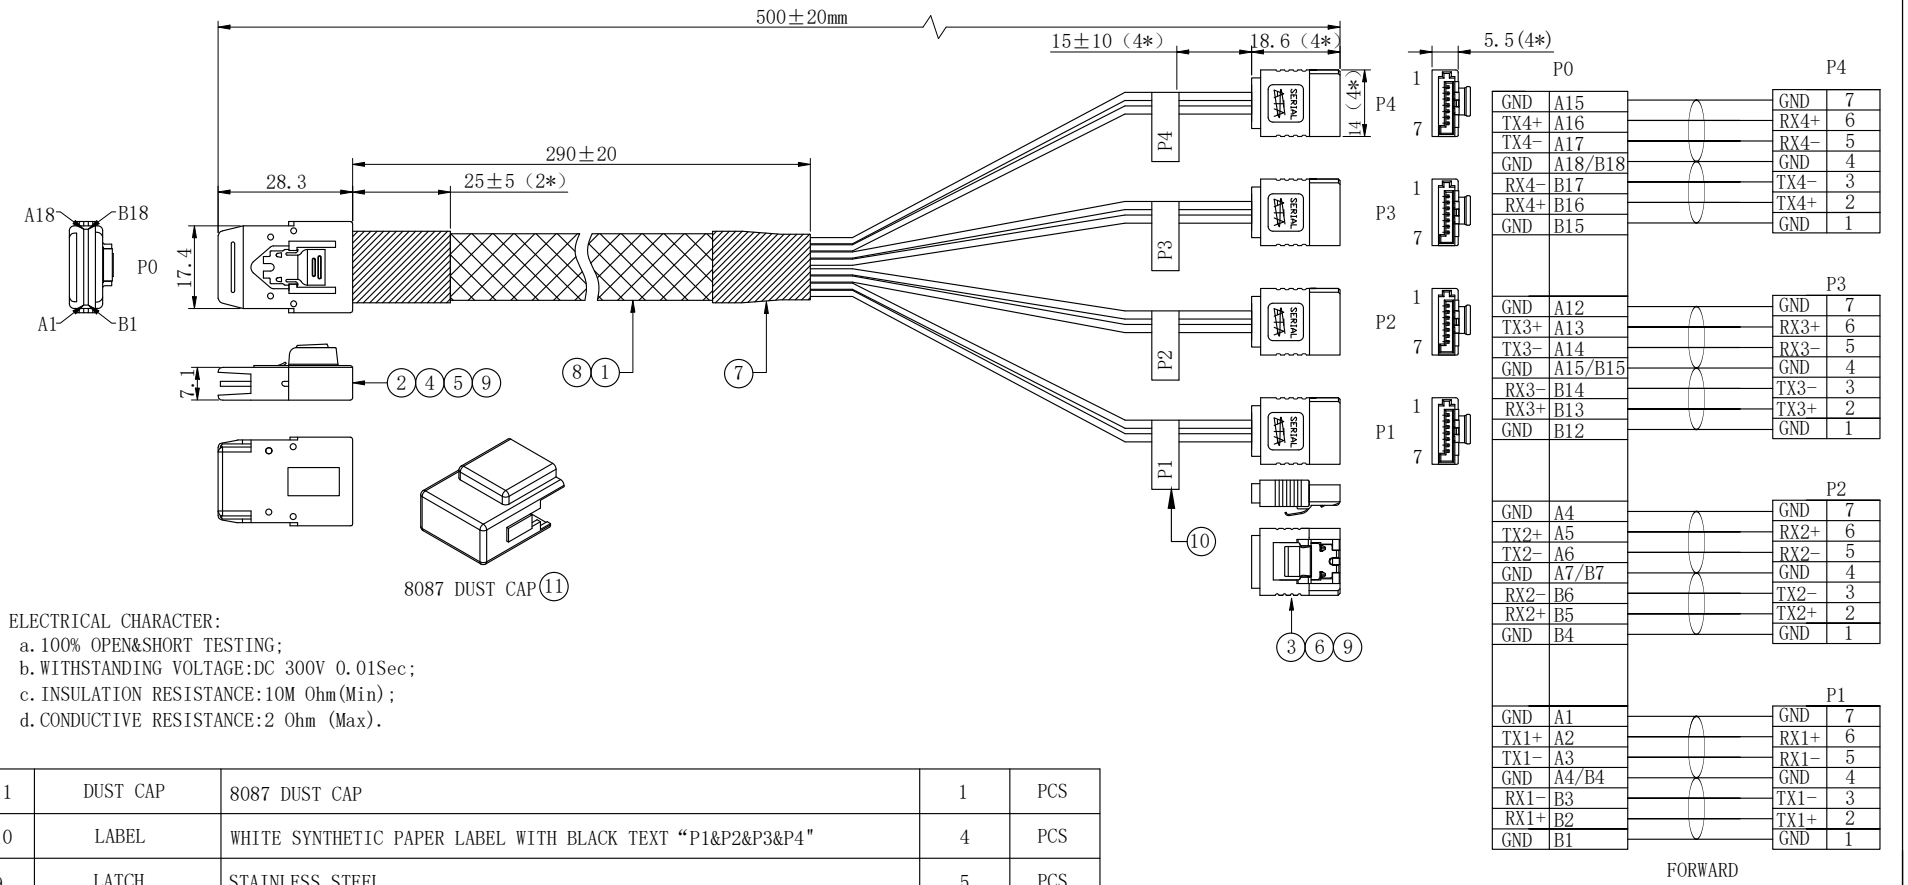


ELECTRICAL CHARACTER:

a. 100% OPEN&SHORT TESTING;

b. WITHSTANDING VOLTAGE:DC 300V 0.01Sec;

c. INSULATION RESISTANCE:10M Ohm(Min);

d. CONDUCTIVE RESISTANCE:2 Ohm (Max).

NO.	PART NAME	SPEC DESCRIPTION	QT'Y	UNIT
11	DUST CAP	8087 DUST CAP	1	PCS
10	LABEL	WHITE SYNTHETIC PAPER LABEL WITH BLACK TEXT "P1&P2&P3&P4"	4	PCS
9	LATCH	STAINLESS STEEL	5	PCS
8	EXPANDO	PET OD: 10mm, BLACK	A/R	M
7	ACETATE TAPE	W=25±10mm,BLACK	A/R	M
6	MOLDING	45P PVC BLACK	A/R	G
5	MOLDING	LDPE,NATURAL	A/R	G
4	MOLDING	PBT+20%GF BLACK	A/R	G
3	CONNECTOR	SATA 7P/F,PIN:G/F	4	PCS
2	PCB	MINISAS 8087 PCB, PIN:Au 15U", 100±10 ohm	1	PCS
1	CABLE	30AWG*1P+32AWG*2C,OD:0.95*2.25MM,100±5 ohm	A/R	M

REV	DESCRIPTION OF CHANGE	DATE
A	INITIAL RELEASE	25/09/20

TOLERANCE	INCHES	MM
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05

DRAWN BY	WXF
CHECK BY	
APPD BY	
CUSTOMER P/N:	

OIKWAN® 东莞市蔼群实业有限公司
DONGGUAN AIQUN INDUSTRIAL CO.,LTD

SCALE	NONE	REV	A
UNIT	MM		
SHEET	1/1	CUSTUMER:	
DATE	25/09/20	DWG NO:	

TITLE: MINISAS 8087-4*SATA

P/N:1.AMS1S0010001