


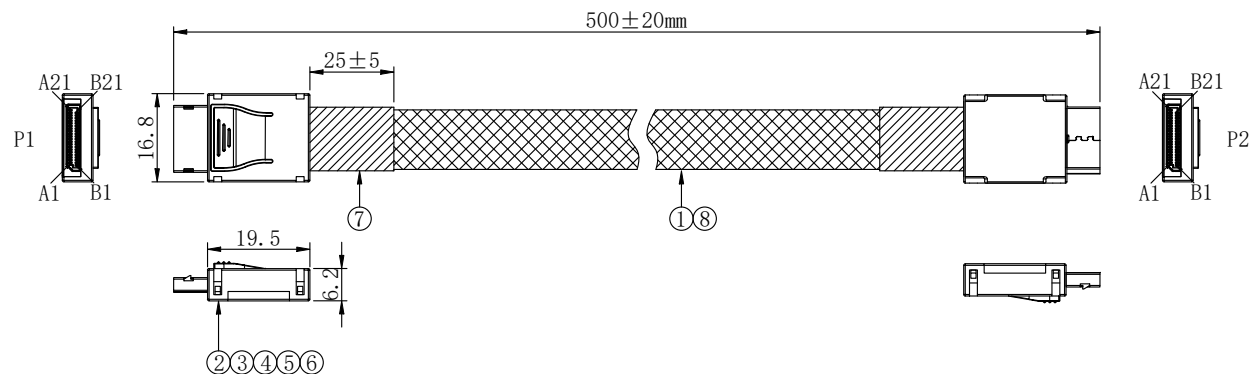

ELECTRICAL CHARACTER:

- 100% OPEN&SHORT TESTING;
- WITHSTANDING VOLTAGE:DC 300V 0.01Sec;
- INSULATION RESISTANCE:10M Ohm (Min) ;
- CONDUCTIVE RESISTANCE:2 Ohm (Max).

WIRING TABLF

P1		P2	
A1	NC	B1	NC
A2	GND	B2	GND
A3	RX1+	B3	TX1+
A4	RX1-	B4	TX1-
A5	GND	B5	GND
A6	RX2+	B6	TX2+
A7	RX2-	B7	TX2-
A8	GND	B8	GND
A9	SIDEBAND	B9	SIDEBAND
A10	SIDEBAND	B10	SIDEBAND
A11	GND	B11	GND
A12	SIDEBAND	B12	SIDEBAND
A13	SIDEBAND	B13	SIDEBAND
A14	GND	B14	GND
A15	RX3+	B15	TX3+
A16	RX3-	B16	TX3-
A17	GND	B17	GND
A18	RX4+	B18	TX4+
A19	RX4-	B19	TX4-
A20	GND	B20	GND
A21	NC	B21	NC
B1	NC	A1	NC
B2	GND	A2	GND
B3	TX1+	A3	RX1+
B4	TX1-	A4	RX1-
B5	GND	A5	GND
B6	TX2+	A6	RX2+
B7	TX2-	A7	RX2-
B8	GND	A8	GND
B9	SIDEBAND	A9	SIDEBAND
B10	SIDEBAND	A10	SIDEBAND
B11	GND	A11	GND
B12	SIDEBAND	A12	SIDEBAND
B13	SIDEBAND	A13	SIDEBAND
B14	GND	A14	GND
B15	TX3+	A15	RX3+
B16	TX3-	A16	RX3-
B17	GND	A17	GND
B18	TX4+	A18	RX4+
B19	TX4-	A19	RX4-
B20	GND	A20	GND
B21	NC	A21	NC

8	EXPANDO	PET OD: 10mm, BLACK	A/R	M	A	INITIAL RELEASE					26/06/18	
7	ACETATE TAPE	W=25±5mm, BLACK	A/R	M	REV	DESCRIPTION OF CHANGE					DATE	
6	MOLDING	LDPE, NATURAL	A/R	G	TOLERANCE			DIKWAN® 东莞市蔼群实业有限公司 DONGGUAN AIQUN INDUSTRIAL CO.,LTD				
5	HOUSING	OCULINK 4I TOP COVER PA66, BLACK	2	PCS	INCHES MM							
4	HOUSING	OCULINK 4I BOTTOM COVER PA66, BLACK	2	PCS	. X	. 015	. 30					
3	CONNECTOR	OCULINK 4I CONN	2	PCS	. XX	. 010	. 10					
2	PCB	OCULINK 4I PCB 88±8 ohm	2	PCS	. XXX	. 005	. 05	SCALE	NONE		REV	A
1	CABLE	32AWG*1P+32AWG*2C, ODO.65*1.54mm, 85±5 ohm	A/R	M	DRAWN BY	W XF		UNIT	MM			
NO.	PART NAME	SPEC DESCRIPTION	QT' Y	UNIT	CUSTOMER P/N:	P/N: 1. AMS880010009						

DIKWAN® 东莞市莞群实业有限公司
DONGGUAN AIQUN INDUSTRIAL CO.,LTD