


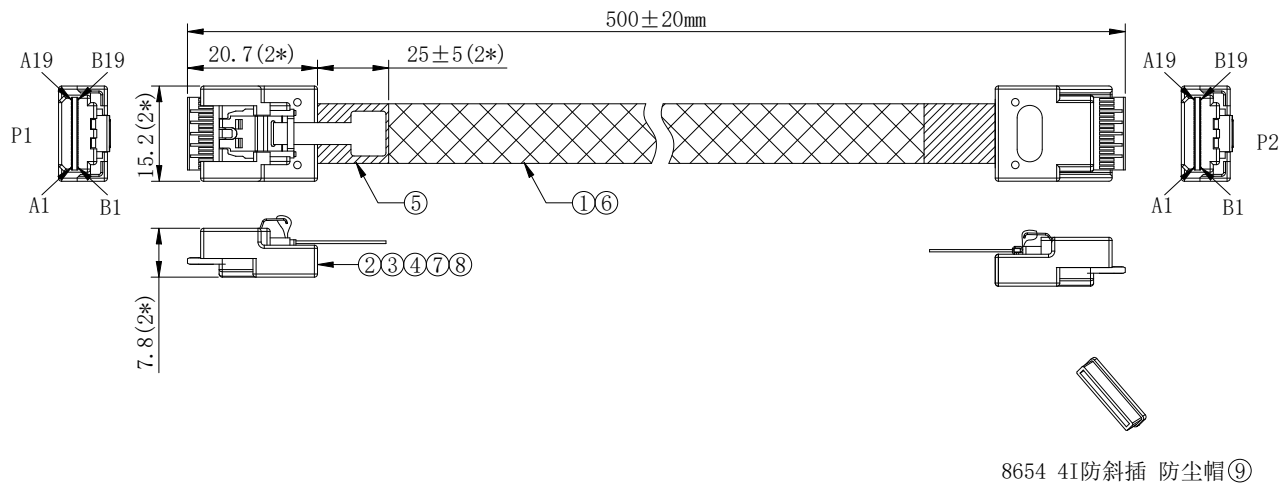

电气特性:

1. 100%开路、短路、断路测试。
2. 绝缘阻抗: 10M Ohm Min
3. 导通阻抗: 2 Ohm MAX
4. 耐压: DC 300V, 0.01/Sec

P1		P2	
B19	GND	A19	GND
B18	TX3-	A18	RX3-
B17	TX3+	A17	RX3+
B16	GND	A16	GND
B15	TX2-	A15	RX2-
B14	TX2+	A14	RX2+
B13	GND	A13	GND
B12	SIDEBAND	A12	SIDEBAND
B11	SIDEBAND	A11	SIDEBAND
B10	GND	A10	GND
B9	SIDEBAND	A9	SIDEBAND
B8	SIDEBAND	A8	SIDEBAND
B7	GND	A7	GND
B6	TX1-	A6	RX1-
B5	TX1+	A5	RX1+
B4	GND	A4	GND
B3	TX0-	A3	RX0-
B2	TX0+	A2	RX0+
B1	GND	A1	GND
A19	GND	B19	GND
A18	RX3-	B18	TX3-
A17	RX3+	B17	TX3+
A16	GND	B16	GND
A15	RX2-	B15	TX2-
A14	RX2+	B14	TX2+
A13	GND	B13	GND
A12	SIDEBAND	B12	SIDEBAND
A11	SIDEBAND	B11	SIDEBAND
A10	GND	B10	GND
A9	SIDEBAND	B9	SIDEBAND
A8	SIDEBAND	B8	SIDEBAND
A7	GND	B7	GND
A6	RX1-	B6	TX1-
A5	RX1+	B5	TX1+
A4	GND	B4	GND
A3	RX0-	B3	TX0-
A2	RX0+	B2	TX0+
A1	GND	B1	GND

9	防尘帽	8654 4I 防斜插 防尘帽	2	PCS									
8	拉环	拉环	2	PCS	A	INITIAL RELEASE							26/08/04
7	弹片	不锈钢弹片	2	PCS	REV	DESCRIPTION OF CHANGE							DATE
6	网管	PET OD:10mm, 黑色	A/R	M	TOLERANCE			DIKWAN® 东莞市蔼群实业有限公司 DONGGUAN AIQUN INDUSTRIAL CO.,LTD					
5	醋酸胶布	W=25±5mm, 黑色	A/R	M	INCHES MM								
4	胶料	PBT+20%GF, 黑色	A/R	G	. X	.015	.30						
3	胶料	LDPE, NATURAL	A/R	G	. XX	.010	.10						
2	PCB	SLIMSAS 8654 4I PCB, PIN: Au 15U" 88±8 ohm	2	PCS	. XXX	.005	.05	SCALE	NONE		REV	A	
1	线材	32AWG*1P+32AWG*2C, ODO. 65*1.54mm, 85±5 ohm	A/R	M	DRAWN BY		WXF	UNIT	MM				
NO. PART NAME	SPEC DESCRIPTION		Q' TY	UNITS	CHECK BY		SHEET		1/1	CUSTOMER:			
					APPD BY		DATE		26/08/04	DWG NO:			
							TITLE: SLIMSAS 8654 4I防斜插-4I防斜插						
					CUSTOMER P/N:		P/N: 1. AMS99FF10002						