



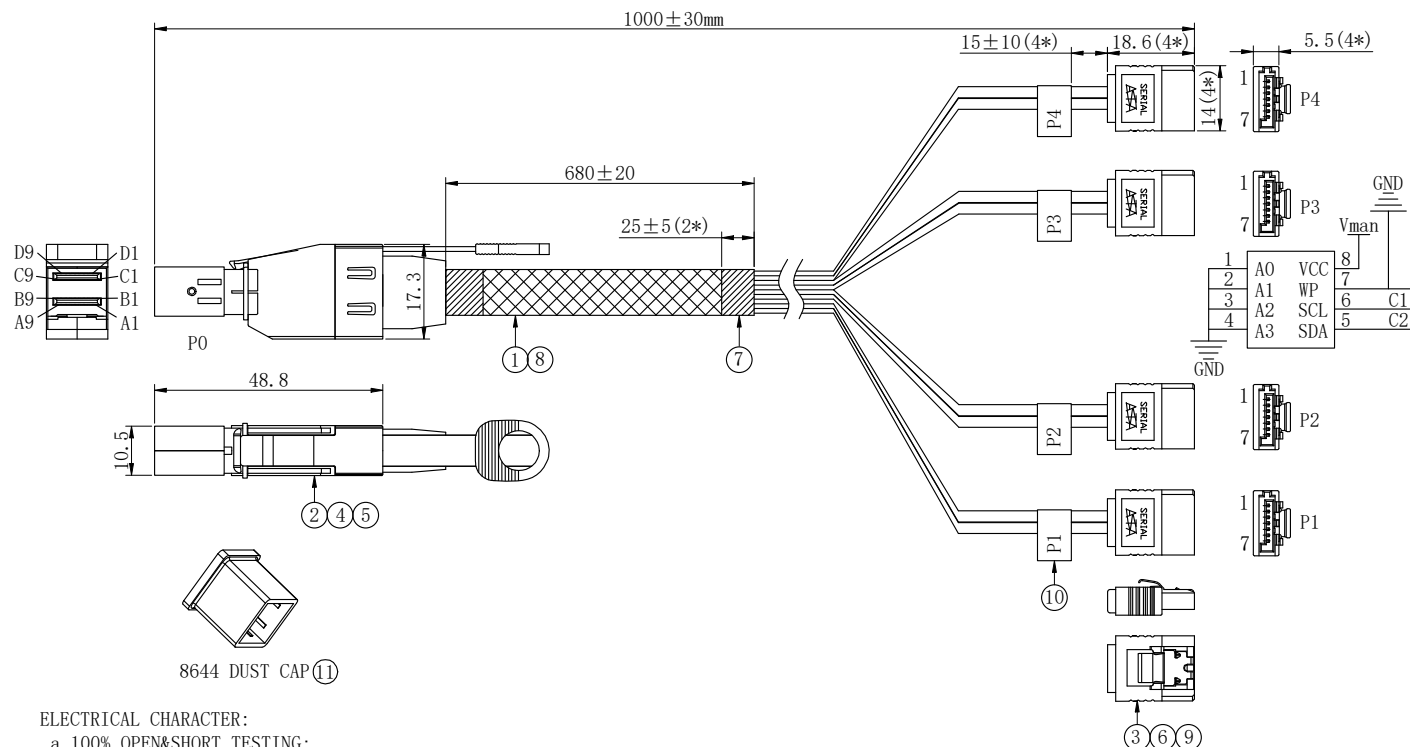

ELECTRICAL CHARACTER:

- a. 100% OPEN&SHORT TESTING;
- b. WITHSTANDING VOLTAGE:DC 300V 0.01Sec;
- c. INSULATION RESISTANCE:10M Ohm (Min) ;
- d. CONDUCTIVE RESISTANCE:2 Ohm (Max).

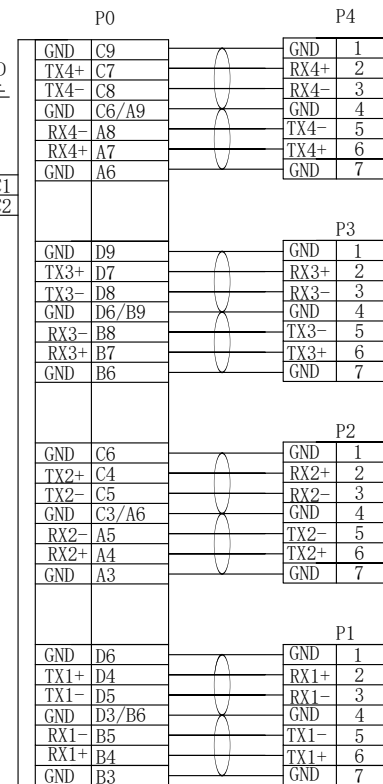

FORWARD

11	DUST CAP	8644 DUST CAP	1	PCS
10	LABEL	WHITE SYNTHETIC PAPER LABEL WITH BLACK TEXT “P1&P2&P3&P4”	4	PCS
9	LATCH	STAINLESS STEEL	4	PCS
8	EXPANDO	PET OD: 10mm, BLACK	A/R	M
7	ACETATE TAPE	W=25±5mm, BLACK	A/R	M
6	MOLDING	45P PVC BLACK	A/R	G
5	MOLDING	PA, BLACK	A/R	G
4	ASSEMBLY FITTINGS	MINISAS HD COMPONENTS (ZINC ALLOY COVER, HOOK, PULL TAB, RUBBER RING)	1	PCS
3	CONNECTOR	SATA 7P/F, PIN:G/F	4	PCS
2	PCB	MINISAS HD 4X PCBA, PIN: Au 15U”, 100±10 Ohm	2	PCS
1	CABLE	30AWG*1P+32AWG*2C, OD:0.95*2.25MM, 100±5 ohm	A/R	M
NO.	PART NAME	SPEC DESCRIPTION	QT’ Y	UNIT

A	INITIAL RELEASE		26/06/30				
REV	DESCRIPTION OF CHANGE		DATE				
TOLERANCE			DIKWAN® 东莞市蔼群实业有限公司 DONGGUAN AIQUN INDUSTRIAL CO.,LTD				
INCHES MM							
. X	. 015	. 30					
. XX	. 010	. 10					
. XXX	. 005	. 05					
DRAWN BY	WXF		SCALE	NONE		REV	A
CHECK BY			UNIT	MM			
APPD BY			SHEET	1/1	CUSTOMER:		
CUSTOMER P/N:			DATE	26/06/30	DWG NO:		
			TITLE:8644-4*SATA				
			P/N: 1. AMS4S0010003				

FORWARD