
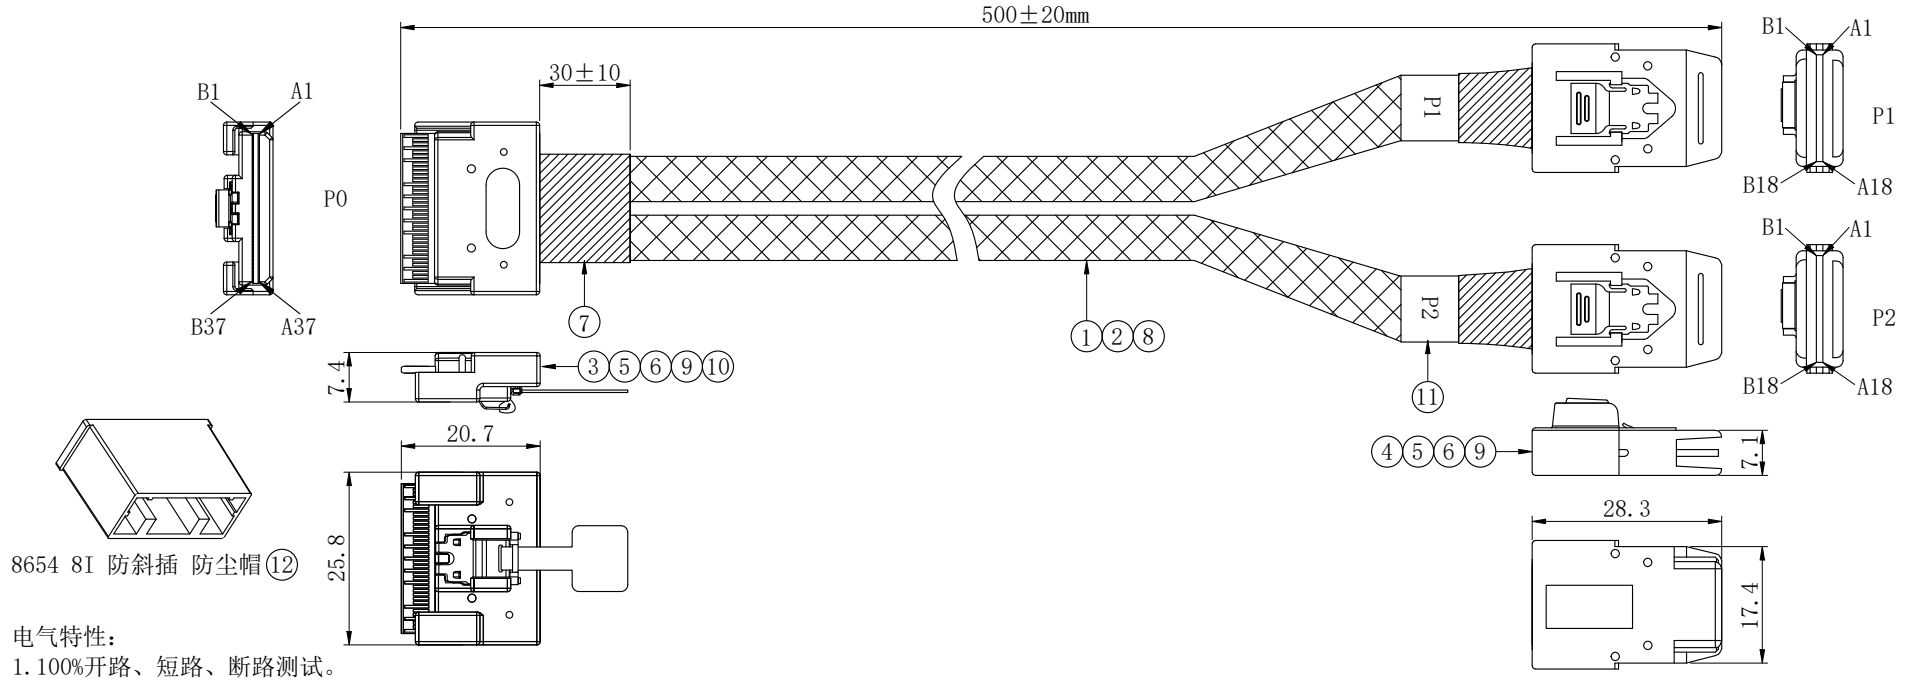


8654 8I 防斜插 防尘帽⑫



8087防尘帽 ⑬

电气特性：
1.100%开路、短路、断路测试。
2.绝缘阻抗：10M Ohm Min
3.导通阻抗：2 Ohm MAX
4.耐压：DC 300V,0.01/Sec

NO.	PART NAME	SPEC DESCRIPTION	Q'TY	UNITS
13	防尘盖	8087 防尘盖	2	PCS
12	防尘盖	8654 8I 防斜插防尘帽	1	PCS
11	标签	白底黑字“P1/P2”合成纸	2	PCS
10	拉环	拉环	1	PCS
9	弹片	不锈钢弹片	3	PCS
8	网管	PET OD：10mm，黑色	A/R	M
7	醋酸胶布	W=25±5mm,黑色	A/R	M
6	胶料	PBT+20%GF，黑色	A/R	G
5	胶料	LDPE,NATURAL	A/R	G
4	PCB	SAS 8087 PCB，PIN:Au 15U″ 100±10 ohm	2	PCS
3	PCB	SLIMSAS 8654 8I PCB,PIN:Au 15U″ 88±8 ohm	1	PCS
2	线材	30AWG 电子线(白/橙/红/白/蓝)	A/R	M
1	线材	32AWG*1P+32AWG*2C，OD0.65*1.54mm,85±5 ohm	A/R	M

REV	DESCRIPTION OF CHANGE	DATE
A	INITIAL RELEASE	26/08/03

TOLERANCE	INCHES	MM
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05


DRAWN BY	WXF
CHECK BY	
APPD BY	
CUSTOMER P/N:	

OIKWAN® 东莞市蔼群实业有限公司
DONGGUAN AIQUN INDUSTRIAL CO.,LTD

SCALE	NONE	REV	A
UNIT	MM		
SHEET	1/2	CUSTUMER:	
DATE	26/08/03	DWG NO:	

TITLE: SLIMSAS 8654 8I防斜插-2*8087

P/N: 1.AMSA1F010001

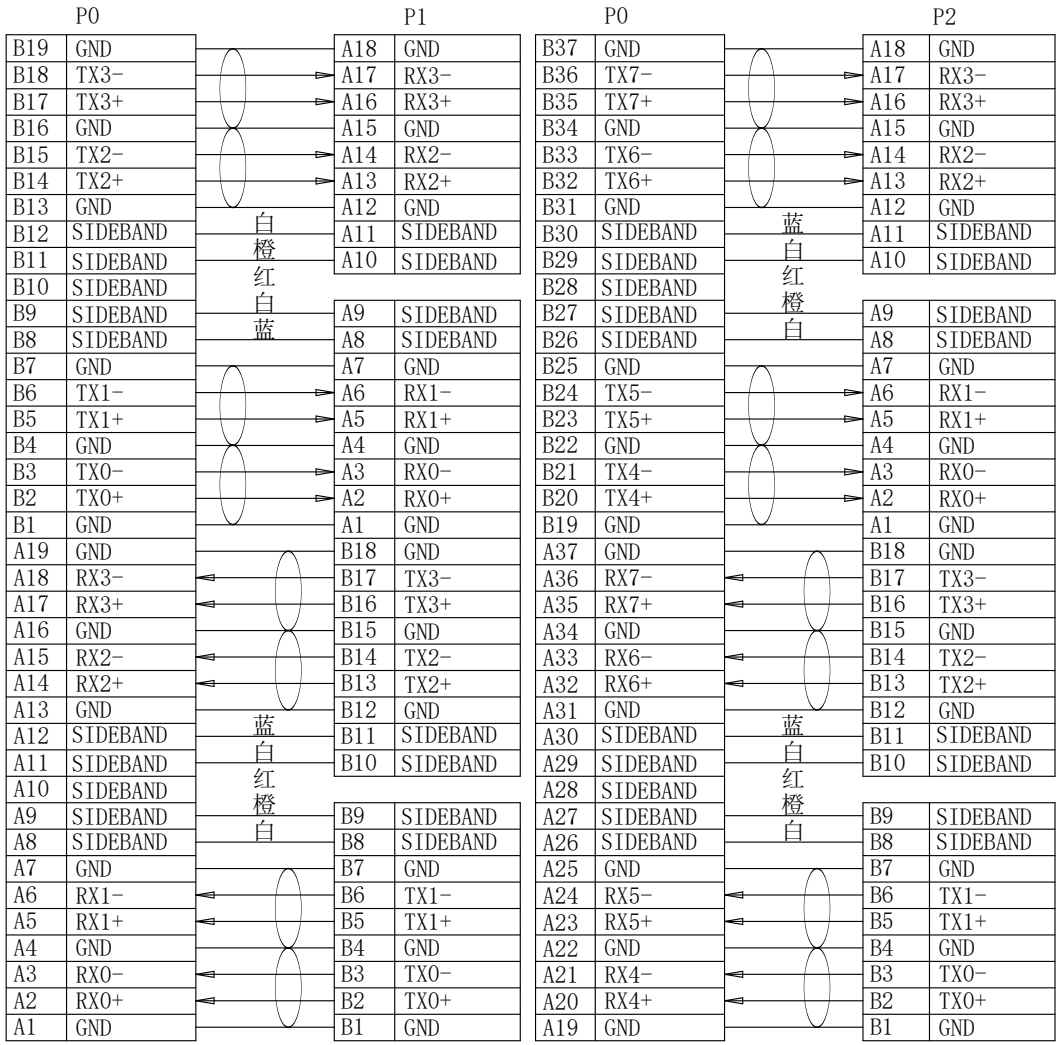

A	INITIAL RELEASE	26/08/03
REV	DESCRIPTION OF CHANGE	DATE

TOLERANCE	INCHES	MM
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05
DRAWN BY	WXF	
CHECK BY		
APPD BY		
CUSTOMER P/N:		

OIKWAN® 东莞市蔼群实业有限公司
DONGGUAN AIQUN INDUSTRIAL CO.,LTD

SCALE	NONE	REV	A
UNIT	MM		
SHEET	2/2	CUSTUMER:	
DATE	26/08/03	DWG NO:	

TITLE: SLIMSAS 8654 8I防斜插-2*8087

P/N:1.AMSA1F010001