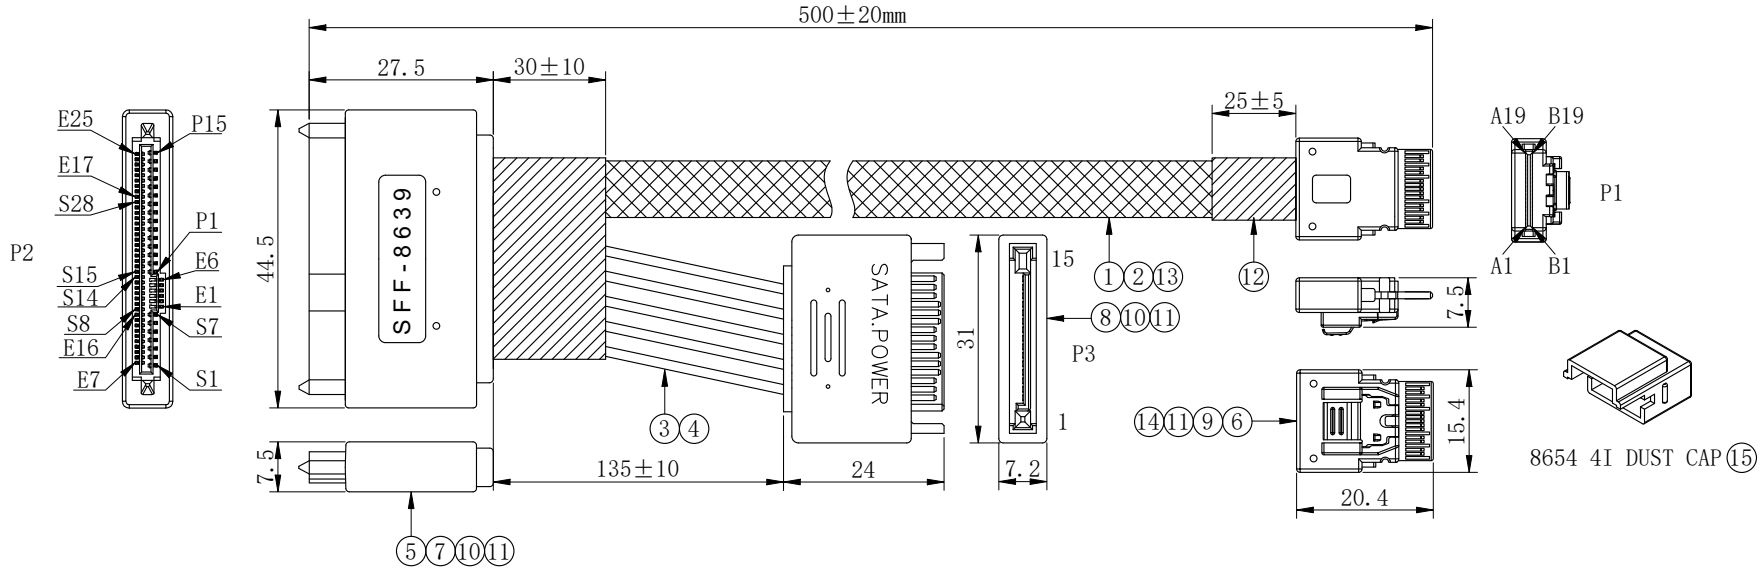


ELECTRICAL CHARACTER:

a. 100% OPEN&SHORT TESTING;
b. WITHSTANDING VOLTAGE:DC 300V 0.01Sec;
c. INSULATION RESISTANCE:10M Ohm(Min);
d. CONDUCTIVE RESISTANCE:2 Ohm (Max).

NO.	PART NAME	MATERIAL DESCRIPTION	Q'TY	UNIT
15	DUST CAP	8654 4I DUST CAP	1	PCS
14	LATCH	STAINLESS STEEL	1	PCS
13	EXPANDO	PET OD：10mm，BLACK	A/R	M
12	ACETATE TAPE	W=25±5mm，BLACK	A/R	M
11	MOLDING	LDPE,NATURAL	A/R	G
10	MOLDING	45P PVC BLACK	A/R	G
9	MOLDING	PBT+20%GF,BLACK	A/R	G
8	CONNECTOR	SATA 15P/M G/F BLACK	1	PCS
7	CONNECTOR	SAS 68P/F WELDED 180° BLACK	1	PCS
6	PCB	SLIMSAS 8654 4I PCB, PIN:Au 15U″, 88±8 ohm	1	PCS
5	PCB	MINISAS 8639 PCB, PIN:Au 1U″, 88±8 ohm	1	PCS
4	CABLE	24AWG CABLE(RED/BLACK)	A/R	M
3	CABLE	20AWG CABLE(BLACK/RED/YELLOW)	A/R	M
2	CABLE	30AWG CABLE(RED/WHITE/BLUE)(WHITE/GREEN)(BLUE)	A/R	M
1	CABLE	32AWG*1P+32AWG*2C，OD0.65*1.54mm,85±5 ohm	A/R	M

REV	DESCRIPTION OF CHANGE	DATE
A	INITIAL RELEASE	26/06/25

TOLERANCE	INCHES	MM
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05


DRAWN BY	WXF
CHECK BY	
APPD BY	
CUSTOMER P/N:	

OIKWAN® 东莞市蔼群实业有限公司
DONGGUAN AIQUN INDUSTRIAL CO.,LTD

SCALE	NONE	REV	A
UNIT	MM		
SHEET	1/2	CUSTUMER:	
DATE	26/06/25	DWG NO:	

TITLE: SLIMSAS 8654 4I-8639

P/N: 1.AMS970E10001

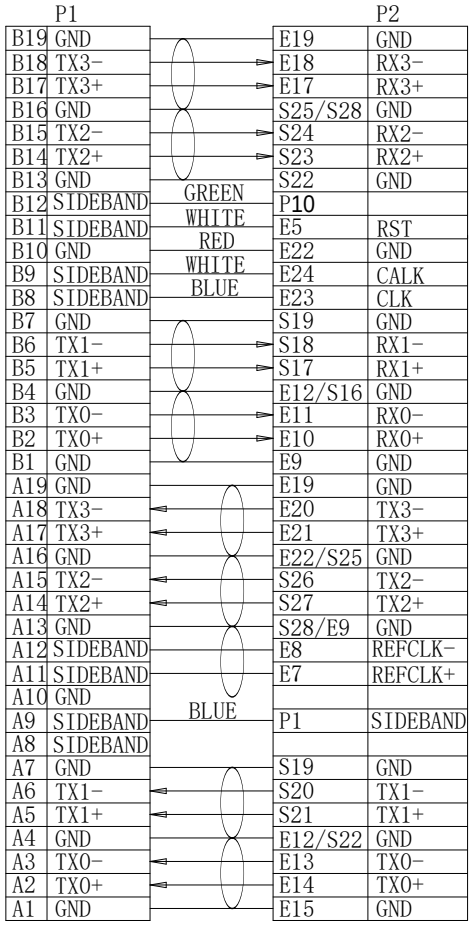

P2	E3	P5	P6	P7	P8	P9	P12	P13	P14	P15
P3	P1P2P3	P4P5P6		P7P8P9			P10P11P12	P13P14P15		
SYMBOL	3.3V	GND		5V			GND	12V		
WIRE AWG	24AWG RED	20AWG BLACK		20AWG RED			24AWG BLACK	20AWG YELLOW		

REV	DESCRIPTION OF CHANGE	DATE
A	INITIAL RELEASE	26/06/25

TOLERANCE	INCHES	MM
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05

OIKWAN® 东莞市蔼群实业有限公司
DONGGUAN AIQUN INDUSTRIAL CO.,LTD

SCALE	NONE	REV	A
UNIT	MM		
SHEET	2/2	CUSTUMER:	
DATE	26/06/25	DWG NO:	
DRAWN BY	WXF	TITLE: SLIMSAS 8654 4I-8639	
CHECK BY			
APPD BY			
CUSTOMER P/N:		P/N: 1.AMS970E10001	