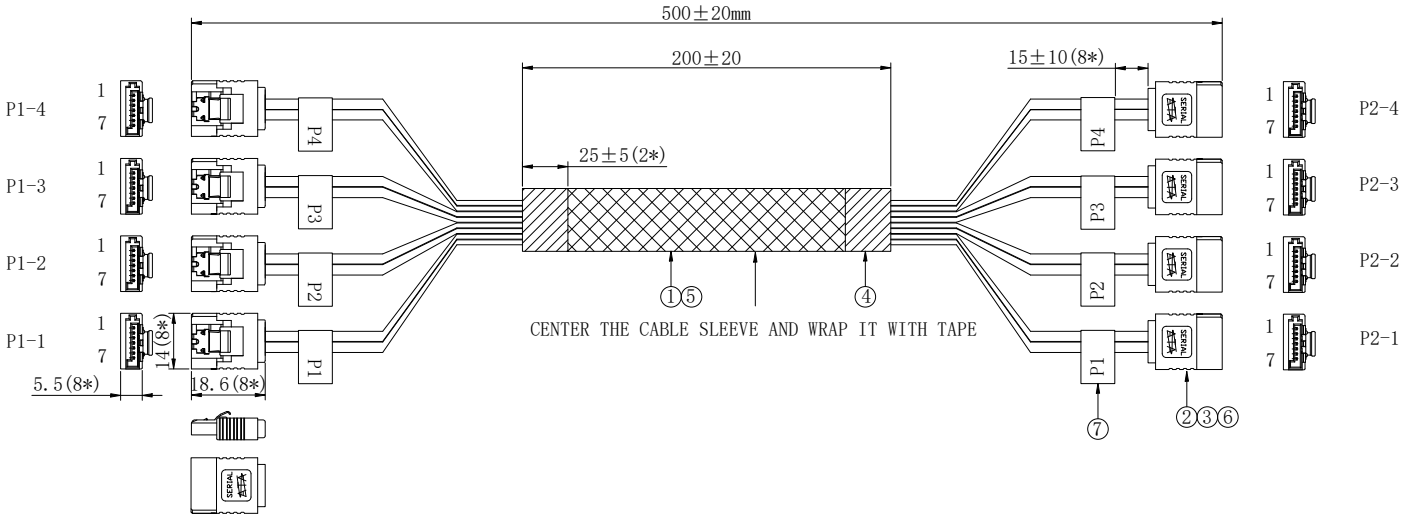


WIRING TABLE

P1-4		P2-4
7	DRAIN WIRE	7
6		6
5		5
4	DRAIN WIRE	4
3		3
2		2
1	DRAIN WIRE	1

P1-3		P2-3
7	DRAIN WIRE	7
6		6
5		5
4	DRAIN WIRE	4
3		3
2		2
1	DRAIN WIRE	1

P1-2		P2-2
7	DRAIN WIRE	7
6		6
5		5
4	DRAIN WIRE	4
3		3
2		2
1	DRAIN WIRE	1

P1-1		P2-1
7	DRAIN WIRE	7
6		6
5		5
4	DRAIN WIRE	4
3		3
2		2
1	DRAIN WIRE	1

ELECTRICAL CHARACTER:
a. 100% OPEN&SHORT TESTING;
b. WITHSTANDING VOLTAGE:DC 300V 0.01Sec;
c. INSULATION RESISTANCE:10M Ohm(Min);
d. CONDUCTIVE RESISTANCE:2 Ohm (Max).

NO.	NAME	SPEC DESCRIPTION	QT'Y	UNIT
7	LABEL	WHITE SYNTHETIC PAPER LABEL WITH BLACK TEXT "P1&P2&P3&P4"	8	PCS
6	LATCH	STAINLESS STEEL	8	PCS
5	EXPANDO	PET OD: 10mm, BLACK	A/R	M
4	ACETATE TAPE	W=25±5mm,BLACK	A/R	M
3	MOLDING	45P PVC BLACK	A/R	G
2	CONNECTOR	SATA 7P/F,PIN:G/F	8	PCS
1	CABLE	30AWG*1P+32AWG*2C,OD:0.95*2.25MM,100±5 ohm	A/R	M

REV	DESCRIPTION OF CHANGE	DATE
A	INITIAL RELEASE	26/06/23

TOLERANCE	INCHES	MM
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05

DRAWN BY	WXF
CHECK BY	
APPD BY	
CUSTOMER P/N:	

OIKWAN® 东莞市蔻群实业有限公司
DONGGUAN AIQUN INDUSTRIAL CO.,LTD

SCALE	NONE	REV	A
UNIT	MM		
SHEET	1/1	CUSTUMER:	
DATE	26/06/23	DWG NO:	

TITLE: 4*SATA TO 4*SATA

P/N: 1.AMSSS0040001