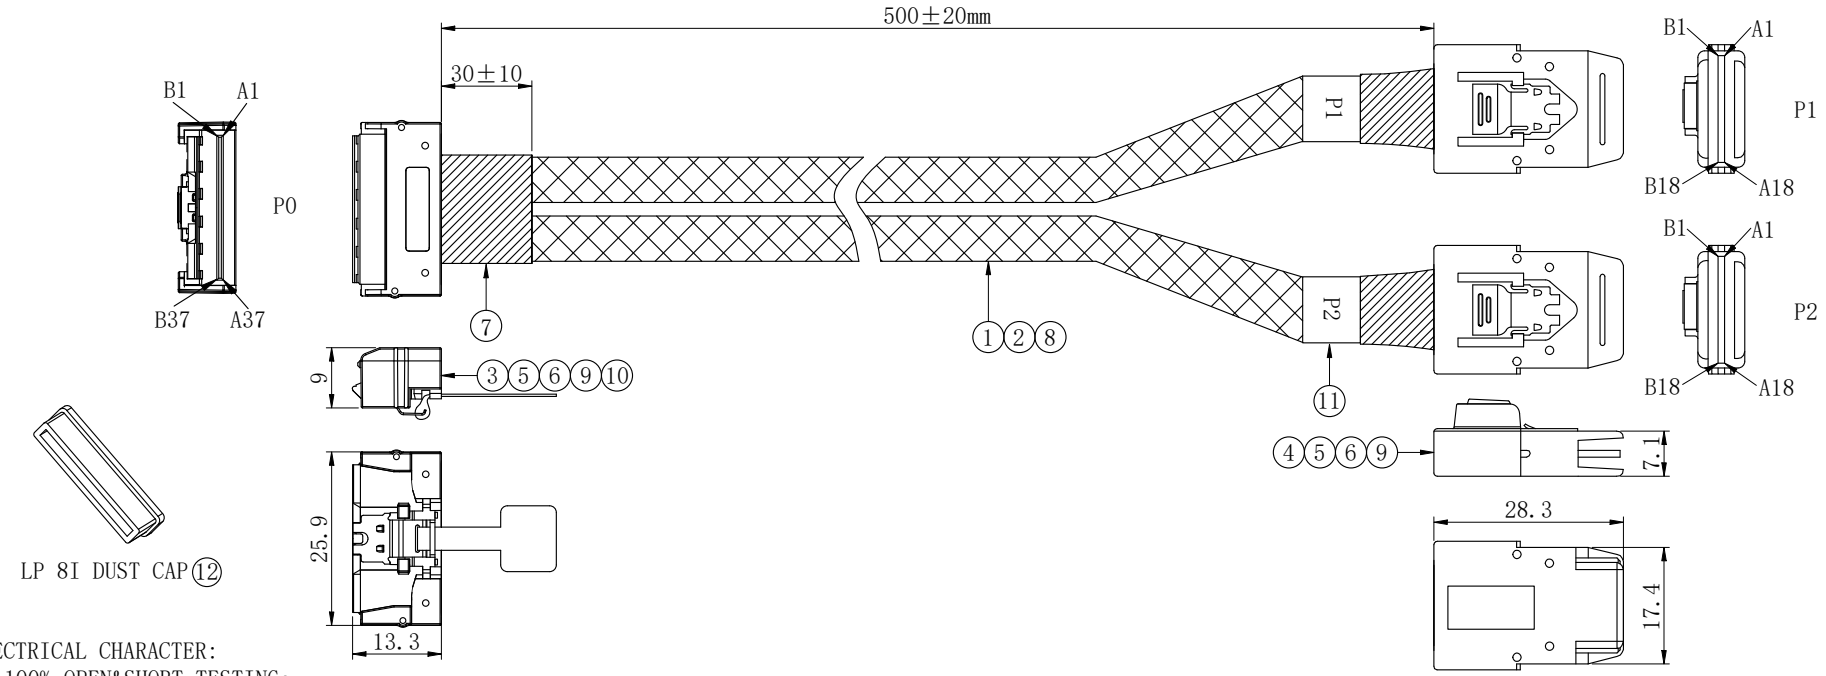



LP 8I DUST CAP (12)

ELECTRICAL CHARACTER:

a. 100% OPEN&SHORT TESTING;
b. WITHSTANDING VOLTAGE:DC 300V 0.01Sec;
c. INSULATION RESISTANCE:10M Ohm(Min);
d. CONDUCTIVE RESISTANCE:2 Ohm (Max).

| NO. | PART NAME | SPEC DESCRIPTION | Q'TY | UNITS |
|---|---|---|---|---|
| 13 | DUST CAP | 8087 DUST CAP | 2 | PCS |
| 12 | DUST CAP | LP 8I DUST CAP | 1 | PCS |
| 11 | LABEL | WHITE SYNTHETIC PAPER LABEL WITH BLACK TEXT "P1/P2" | 2 | PCS |
| 10 | PULL TAB | PULL TAB | 1 | PCS |
| 9 | LATCH | STAINLESS STEEL | 3 | PCS |
| 8 | BRAIDED SLEEVING | PET OD: 10mm, BLACK | A/R | M |
| 7 | ACETATE TAPE | W=25±5mm,BLACK | A/R | M |
| 6 | MOLDING | PBT+20%GF, BLACK | A/R | G |
| 5 | MOLDING | LDPE,NATURAL | A/R | G |
| 4 | PCB | SAS 8087 PCB, PIN:Au 15U" 100±10 ohm | 2 | PCS |
| 3 | PCB | LP SLIMSAS 8I PCB,PIN:Au 15U" ,88±8 ohm | 1 | PCS |
| 2 | CABLE | 30AWG CABLE(WHITE/ORANGE/RED/WHITE/BLUE) | A/R | M |
| 1 | CABLE | 32AWG*1P+32AWG*2C, OD0.65*1.54mm,85±5 ohm | A/R | M |

8087 DUST CAP (13)

| REV | DESCRIPTION OF CHANGE | DATE |
|---|---|---|
| A | INITIAL RELEASE | 26/08/05 |

| TOLERANCE | INCHES | MM |
|---|---|---|
| .X | .015 | .30 |
| .XX | .010 | .10 |
| .XXX | .005 | .05 |


| | |
|---|---|
| DRAWN BY | WXF |
| CHECK BY | |
| APPD BY | |
| CUSTOMER P/N: | |

OIKWAN® 东莞市蔼群实业有限公司
DONGGUAN AIQUN INDUSTRIAL CO.,LTD

| | | | |
|---|---|---|---|
| SCALE | NONE | REV | A |
| UNIT | MM | | |
| SHEET | 1/2 | CUSTUMER: | |
| DATE | 26/08/05 | DWG NO: | |

TITLE: LP 8I-2*8087

P/N: 1.AMSD10010001

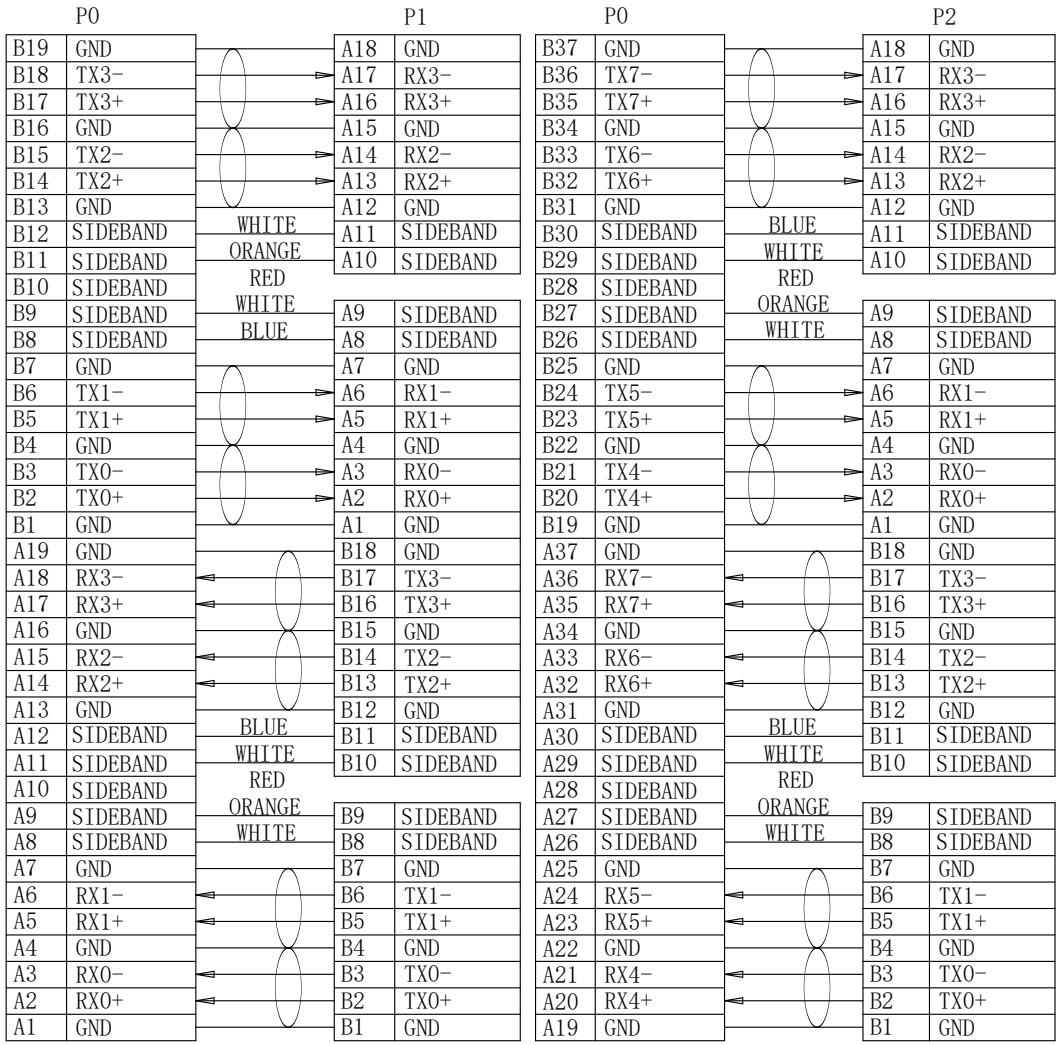


| REV | DESCRIPTION OF CHANGE | DATE |
|---|---|---|
| A | INITIAL RELEASE | 26/08/05 |

| TOLERANCE | INCHES | MM |
|---|---|---|
| .X | .015 | .30 |
| .XX | .010 | .10 |
| .XXX | .005 | .05 |

| | |
|---|---|
| DRAWN BY | WXF |
| CHECK BY | |
| APPD BY | |
| CUSTOMER P/N: | |

OIKWAN® 东莞市蔼群实业有限公司
DONGGUAN AIQUN INDUSTRIAL CO.,LTD

| | | | |
|---|---|---|---|
| SCALE | NONE | REV | A |
| UNIT | MM | | |
| SHEET | 2/2 | CUSTUMER: | |
| DATE | 26/08/05 | DWG NO: | |

TITLE: LP 8I-2*8087

P/N:1.AMSD10010001