


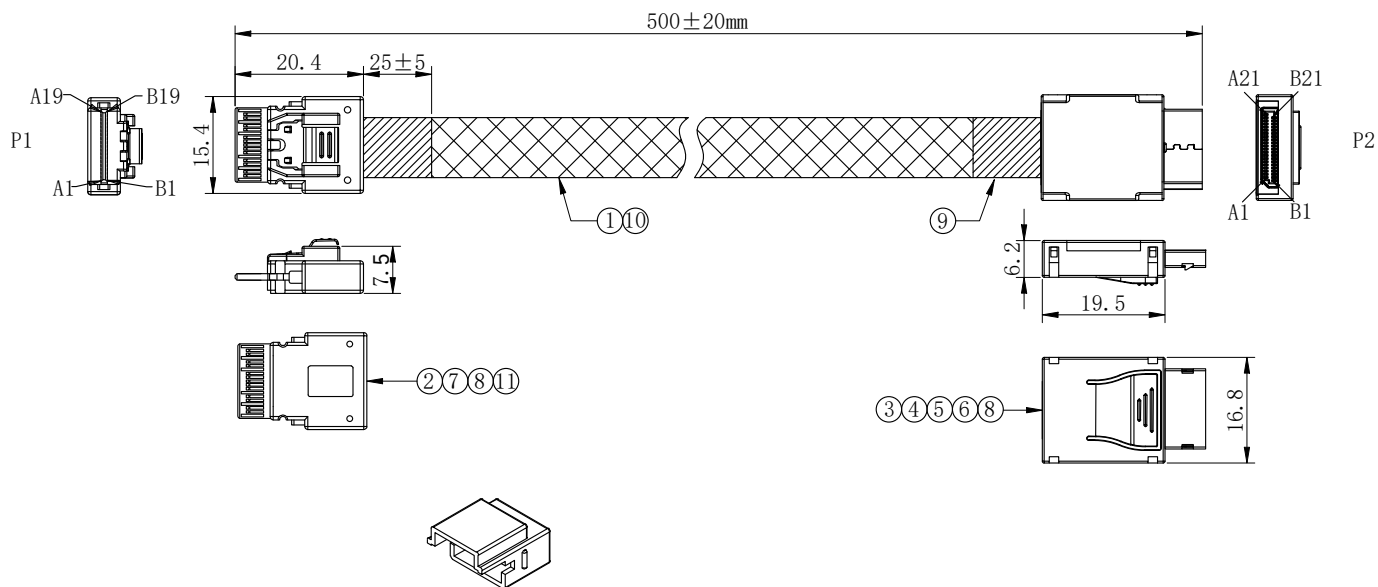


8654 4I DUST CAP⑫

ELECTRICAL CHARACTER:

- 100% OPEN&SHORT TESTING;
- WITHSTANDING VOLTAGE:DC 300V 0.01Sec;
- INSULATION RESISTANCE:10M Ohm(Min);
- CONDUCTIVE RESISTANCE:2 Ohm (Max).

12	DUST CAP	8654 4I DUST CAP	1	PCS
11	LATCH	STAINLESS STEEL	1	PCS
10	EXPANDO	PET OD: 10mm, BLACK	A/R	M
9	ACETATE TAPE	W=25±5mm, BLACK	A/R	M
8	MOLDING	LDPE, NATURAL	A/R	G
7	MOLDING	PBT+20%GF, BLACK	A/R	G
6	HOUSING	OCULINK 4I TOP COVER PA66, BLACK	1	PCS
5	HOUSING	OCULINK 4I BOTTOM COVER PA66, BLACK	1	PCS
4	CONNECTOR	OCULINK 4I CONN	1	PCS
3	PCB	OCULINK 4I PCB 88±8 ohm	1	PCS
2	PCB	SLIMSAS 8654 4I PCB, PIN: Au 15U" 88±8 ohm	1	PCS
1	CABLE	32AWG*1P+32AWG*2C, ODO. 65*1.54mm, 85±5 ohm	A/R	M
NO.	PART NAME	SPEC DESCRIPTION	QT'Y	UNIT

P1		P2	
B19	GND	A20	GND
B18	TX3-	A19	RX3-
B17	TX3+	A18	RX3+
B16	GND	A17	GND
B15	TX2-	A16	RX2-
B14	TX2+	A15	RX2+
B13	GND	A14	GND
B12	SIDEBAND	A13	SIDEBAND
B11	SIDEBAND	A12	SIDEBAND
B10	GND	A11	GND
B9	SIDEBAND	A10	SIDEBAND
B8	SIDEBAND	A9	SIDEBAND
B7	GND	A8	GND
B6	TX1-	A7	RX1-
B5	TX1+	A6	RX1+
B4	GND	A5	GND
B3	TX0-	A4	RX0-
B2	TX0+	A3	RX0+
B1	GND	A2	GND
A19	GND	B20	GND
A18	RX3-	B19	TX3-
A17	RX3+	B18	TX3+
A16	GND	B17	GND
A15	RX2-	B16	TX2-
A14	RX2+	B15	TX2+
A13	GND	B14	GND
A12	SIDEBAND	B13	SIDEBAND
A11	SIDEBAND	B12	SIDEBAND
A10	GND	B11	GND
A9	SIDEBAND	B10	SIDEBAND
A8	SIDEBAND	B9	SIDEBAND
A7	GND	B8	GND
A6	RX1-	B7	TX1-
A5	RX1+	B6	TX1+
A4	GND	B5	GND
A3	RX0-	B4	TX0-
A2	RX0+	B3	TX0+
A1	GND	B2	GND

A	INITIAL RELEASE				26/06/27		
REV	DESCRIPTION OF CHANGE				DATE		
TOLERANCE			DIKWAN® 东莞市蔼群实业有限公司 DONGGUAN AIQUN INDUSTRIAL CO.,LTD				
INCHES							
MM							
.X	.015	.30					
.XX	.010	.10					
.XXX	.005	.05					
DRAWN BY	WXF	SCALE		NONE		REV	A
		UNIT		MM			
CHECK BY		SHEET		1/1	CUSTOMER:		
		DATE	26/06/27	DWG NO:			
APPD BY		TITLE: SLIMSAS 8654 4I-8611					
CUSTOMER P/N:			P/N: 1.AMS980010010				