



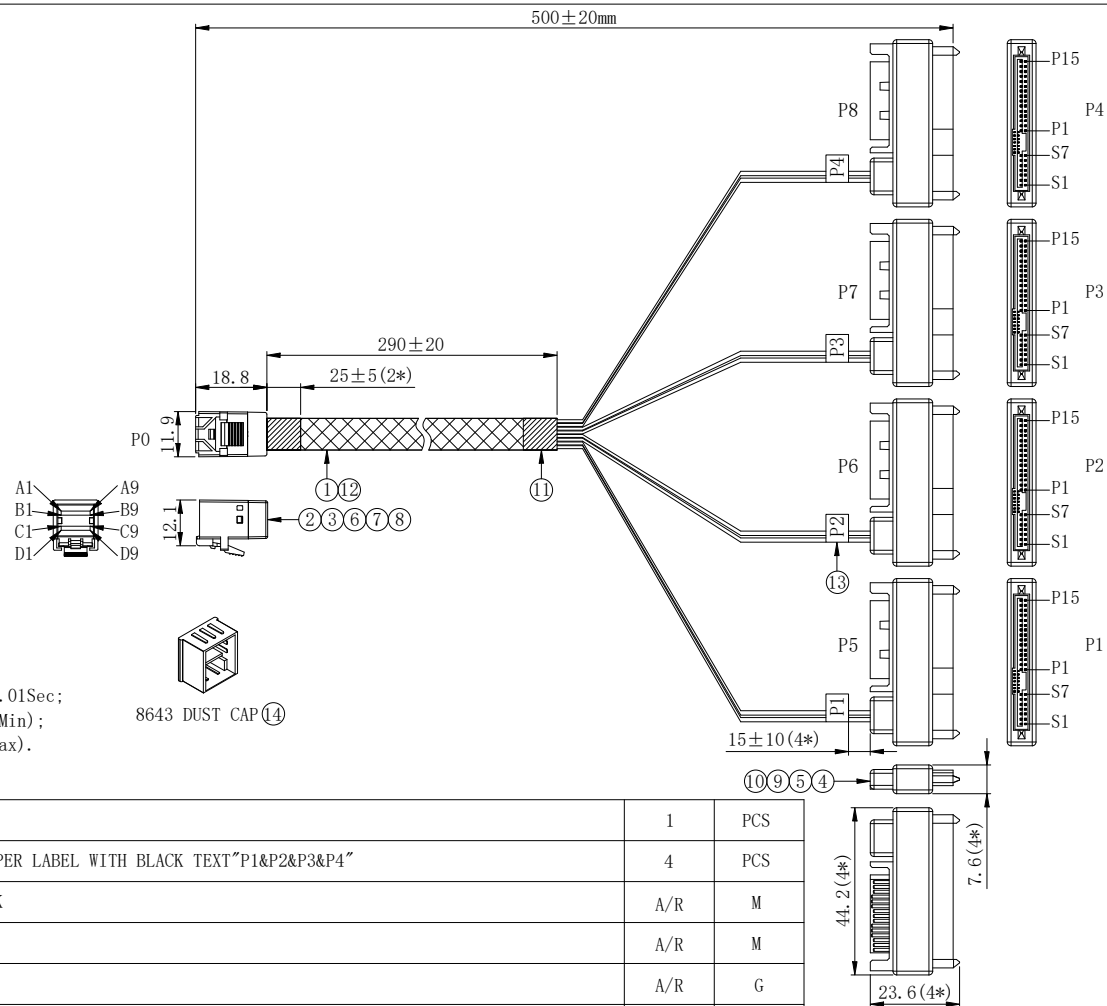


ELECTRICAL CHARACTER:

- 100% OPEN&SHORT TESTING;
- WITHSTANDING VOLTAGE:DC 300V 0.01Sec;
- INSULATION RESISTANCE:10M Ohm(Min);
- CONDUCTIVE RESISTANCE:2 Ohm (Max).

14	DUST CAP	8643 DUST CAP	1	PCS
13	LABEL	WHITE SYNTHETIC PAPER LABEL WITH BLACK TEXT“P1&P2&P3&P4”	4	PCS
12	EXPANDO	PET OD: 10mm, BLACK	A/R	M
11	ACETATE TAPE	W=25±5mm, BLACK	A/R	M
10	MOLDING	LDPE, NATURAL	A/R	G
9	MOLDING	PVC 45P BLACK	A/R	G
8	MOLDING	PA, BLACK	A/R	G
7	HOUSING	MINISAS HD 4I PC BLACK REAR PLUG HOUSING	1	PCS
6	HOUSING	MINISAS HD 4I PC BLACK MAIN BODY HOUSING	1	PCS
5	CONNECTOR	SATA 15P/M G/F BLACK	4	PCS
4	CONNECTOR	SAS 29P/F, PIN:G/F	4	PCS
3	PCB	MINISAS HD 4I PCB(A/B), PIN: Au 15U〃, 100±10 ohm	1	PCS
2	PCB	MINISAS HD 4I PCB(C/D), PIN: Au 15U〃, 100±10 ohm	1	PCS
1	CABLE	30AWG*1P+32AWG*2C, OD:0.95*2.25MM, 100±5 ohm	A/R	M
NO.	PART NAME	SPEC DESCRIPTION	QT'Y	UNIT



A	INITIAL RELEASE			26/06/18			
REV	DESCRIPTION OF CHANGE			DATE			
TOLERANCE			DIKWAN® 东莞市蔼群实业有限公司 DONGGUAN AIQUN INDUSTRIAL CO.,LTD				
INCHES							
MM							
.X	.015	.30					
.XX	.010	.10					
.XXX	.005	.05					
DRAWN BY	WXF		SCALE	NONE		REV	A
			UNIT	MM			
CHECK BY			SHEET	1/2	CUSTOMER:		
			DATE	26/06/18	DWG NO:		
APPD BY			TITLE:8643-4*8482 ALL-IN-ONE				
CUSTOMER P/N:			P/N: 1.AMS350Y10001				

