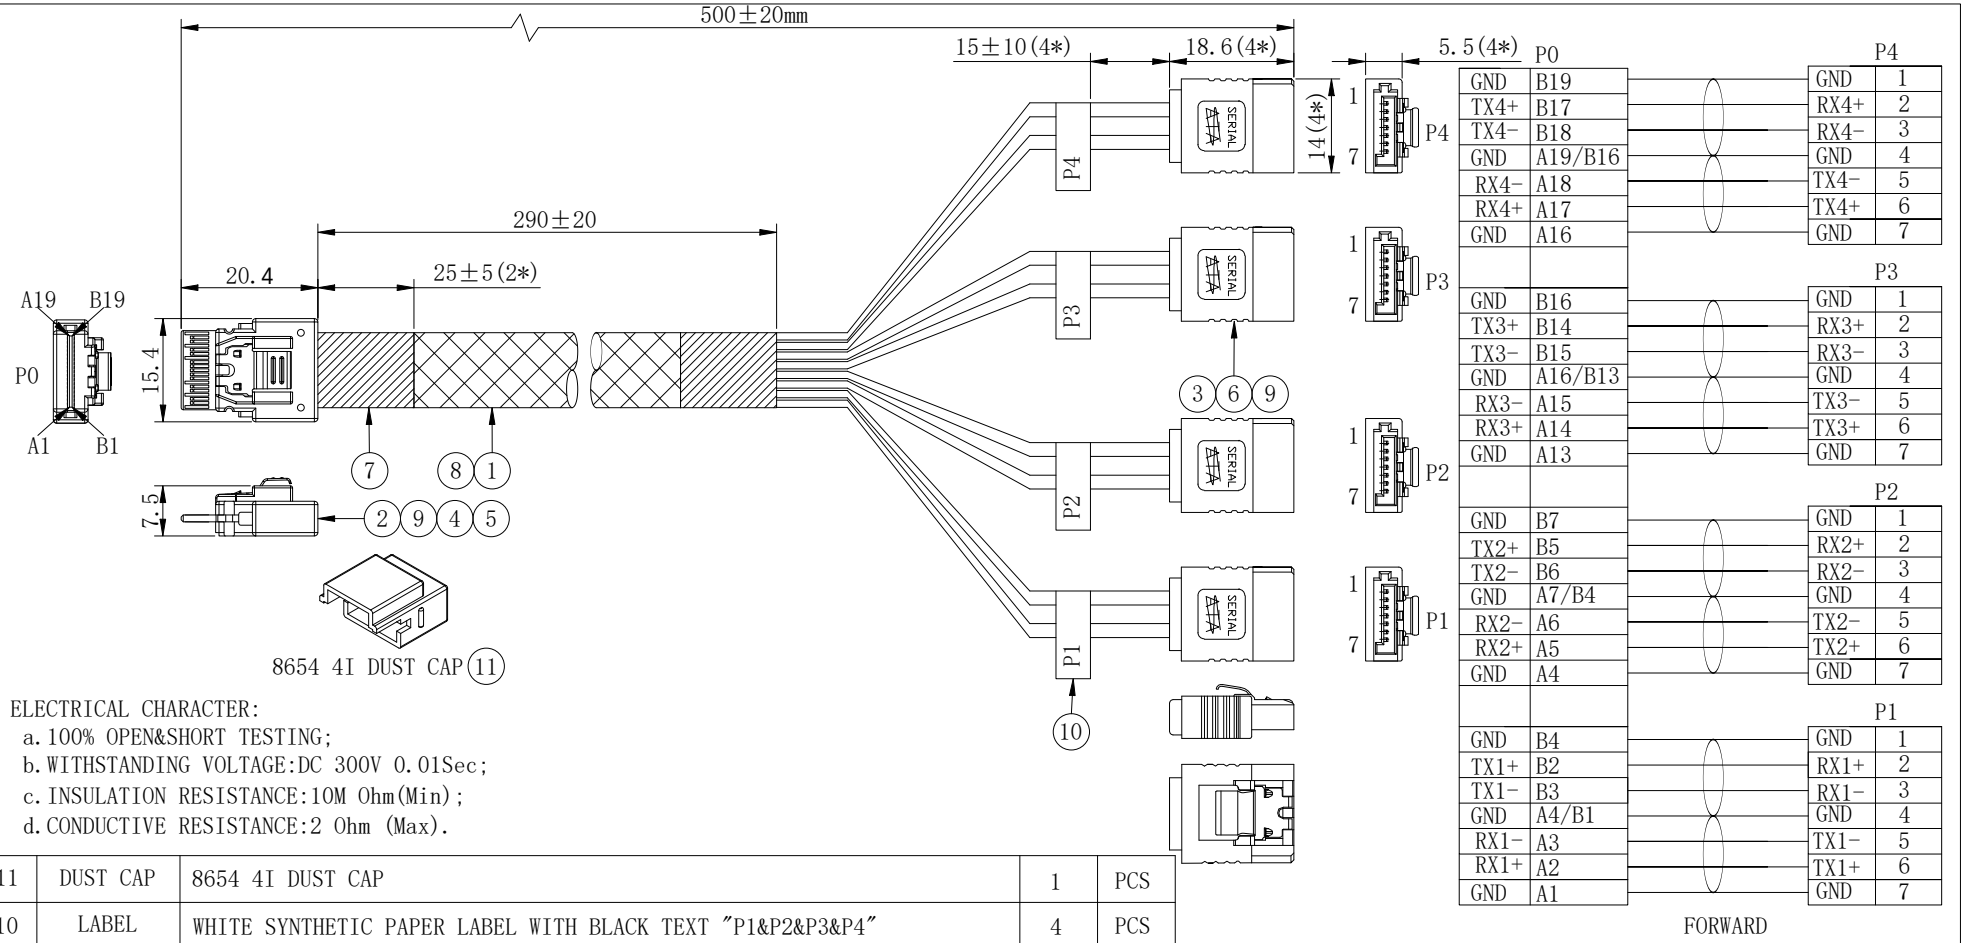


P0		P4	
GND	B19	GND	1
TX4+	B17	RX4+	2
TX4-	B18	RX4-	3
GND	A19/B16	GND	4
RX4-	A18	TX4-	5
RX4+	A17	TX4+	6
GND	A16	GND	7
		P3	
GND	B16	GND	1
TX3+	B14	RX3+	2
TX3-	B15	RX3-	3
GND	A16/B13	GND	4
RX3-	A15	TX3-	5
RX3+	A14	TX3+	6
GND	A13	GND	7
		P2	
GND	B7	GND	1
TX2+	B5	RX2+	2
TX2-	B6	RX2-	3
GND	A7/B4	GND	4
RX2-	A6	TX2-	5
RX2+	A5	TX2+	6
GND	A4	GND	7
		P1	
GND	B4	GND	1
TX1+	B2	RX1+	2
TX1-	B3	RX1-	3
GND	A4/B1	GND	4
RX1-	A3	TX1-	5
RX1+	A2	TX1+	6
GND	A1	GND	7

NO.	PART NAME	SPEC DESCRIPTION	QT'Y	UNIT
11	DUST CAP	8654 4I DUST CAP	1	PCS
10	LABEL	WHITE SYNTHETIC PAPER LABEL WITH BLACK TEXT "P1&P2&P3&P4"	4	PCS
9	LATCH	STAINLESS STEEL	5	PCS
8	EXPANDO	PET OD: 10mm, BLACK	A/R	M
7	ACETATE TAPE	W=25±5mm,BLACK	A/R	M
6	MOLDING	45P PVC BLACK	A/R	G
5	MOLDING	LDPE,NATURAL	A/R	G
4	MOLDING	PBT+20%GF,BLACK	A/R	G
3	CONNECTOR	SATA 7P/F,PIN:G/F	4	PCS
2	PCB	SLIMSAS 8654 4I PCB,PIN:Au 15U" 88±8 ohm	1	PCS
1	CABLE	30AWG*1P+32AWG*2C,OD:0.95*2.25MM,100±5 ohm	A/R	M

REV	DESCRIPTION OF CHANGE	DATE
A	INITIAL RELEASE	26/06/06

TOLERANCE	INCHES	MM
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05

DRAWN BY	WXF
CHECK BY	
APPD BY	
CUSTOMER P/N:	

OIKWAN® 东莞市蔼群实业有限公司
DONGGUAN AIQUN INDUSTRIAL CO.,LTD

SCALE	NONE	REV	A
UNIT	MM		
SHEET	1/1	CUSTUMER:	
DATE	26/06/06	DWG NO:	

TITLE: SLIMSAS 8654 4I-4*SATA

P/N: 1.AMS9S0010001