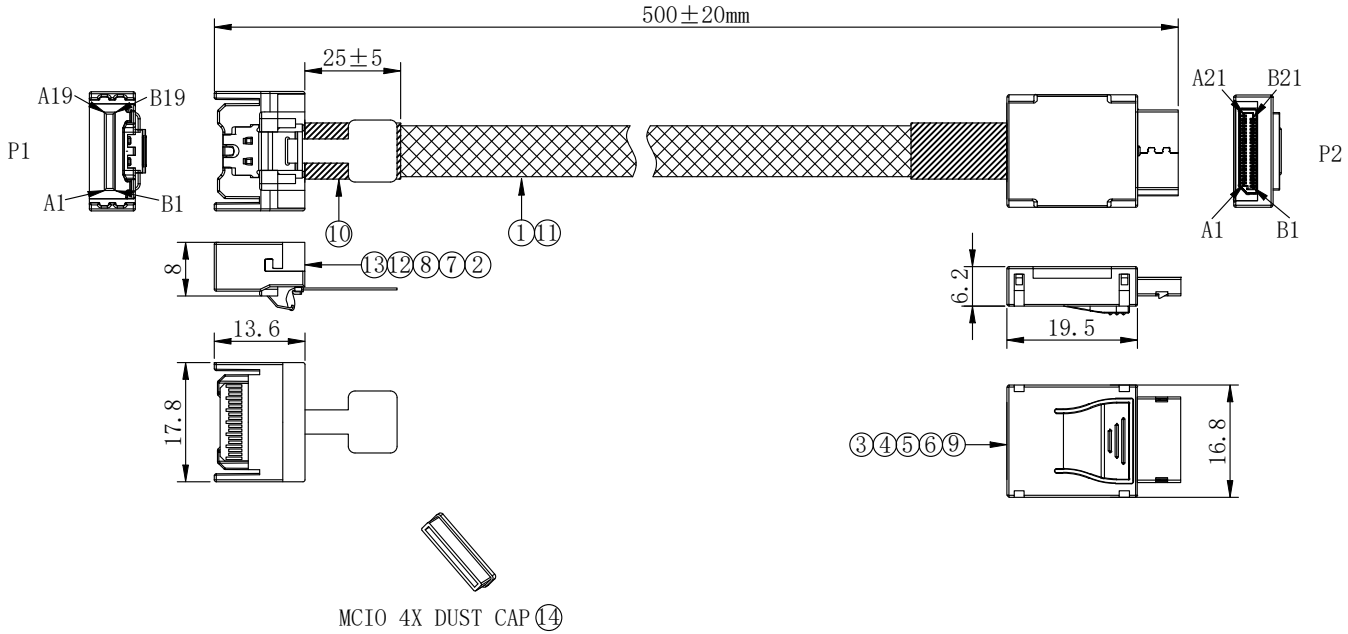


ELECTRICAL CHARACTER:

a. 100% OPEN&SHORT TESTING;

b. WITHSTANDING VOLTAGE:DC 300V 0.01Sec;

c. INSULATION RESISTANCE:10M Ohm(Min);

d. CONDUCTIVE RESISTANCE:2 Ohm (Max).

P1		P2	
B19	GND	A20	GND
B18	TX3-	A19	RX3-
B17	TX3+	A18	RX3+
B16	GND	A17	GND
B15	TX2-	A16	RX2-
B14	TX2+	A15	RX2+
B13	GND	A14	GND
B12	SIDEBAND	A13	SIDEBAND
B11	SIDEBAND	A12	SIDEBAND
B10	GND	A11	GND
B9	SIDEBAND	A10	SIDEBAND
B8	SIDEBAND	A9	SIDEBAND
B7	GND	A8	GND
B6	TX1-	A7	RX1-
B5	TX1+	A6	RX1+
B4	GND	A5	GND
B3	TX0-	A4	RX0-
B2	TX0+	A3	RX0+
B1	GND	A2	GND
A19	GND	B20	GND
A18	RX3-	B19	TX3-
A17	RX3+	B18	TX3+
A16	GND	B17	GND
A15	RX2-	B16	TX2-
A14	RX2+	B15	TX2+
A13	GND	B14	GND
A12	SIDEBAND	B13	SIDEBAND
A11	SIDEBAND	B12	SIDEBAND
A10	GND	B11	GND
A9	SIDEBAND	B10	SIDEBAND
A8	SIDEBAND	B9	SIDEBAND
A7	GND	B8	GND
A6	RX1-	B7	TX1-
A5	RX1+	B6	TX1+
A4	GND	B5	GND
A3	RX0-	B4	TX0-
A2	RX0+	B3	TX0+
A1	GND	B2	GND

NO.	PART NAME	SPEC DESCRIPTION	QT'Y	UNIT
14	DUST CAP	MCIO 4X DUST CAP	1	PCS
13	PULL TAB	PULL TAB	1	PCS
12	LATCH	STAINLESS STEEL	1	PCS
11	BRAIDED SLEEVING	PET OD: 10mm,BLACK	A/R	M
10	ACETATE TAPE	W=25±5mm, BLACK	A/R	M
9	MOLDING	LDPE,NATURAL	A/R	G
8	MOLDING	PA,BLACK	A/R	G
7	HOUSING	MCIO 4X PA66+20%GF BLACK HOUSING	1	PCS
6	HOUSING	OCULINK 4I TOP COVER PA66,BLACK	1	PCS
5	HOUSING	OCULINK 4I BOTTOM COVER PA66,BLACK	1	PCS
4	CONNECTOR	OCULINK 4I CONN	1	PCS
3	PCB	OCULINK 4I PCB 88±8 ohm	1	PCS
2	PCB	MCIO 4X PCB,PIN:Au 15U" 88±8 ohm	1	PCS
1	CABLE	30AWG*1P+34AWG*2C OD:0.8*1.76, 85±5 ohm	A/R	M

REV	DESCRIPTION OF CHANGE	DATE
A	INITIAL RELEASE	26/08/06

TOLERANCE	INCHES	MM
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05

DRAWN BY	WXF
CHECK BY	
APPD BY	
CUSTOMER P/N:	

OIKWAN® 东莞市鸿群实业有限公司 DONGGUAN AIQUN INDUSTRIAL CO.,LTD

SCALE	NONE	REV	A
UNIT	MM		
SHEET	1/1	CUSTUMER:	
DATE	26/08/06	DWG NO:	

TITLE: MCIO 4X-8611

P/N:1.AMSF80010001