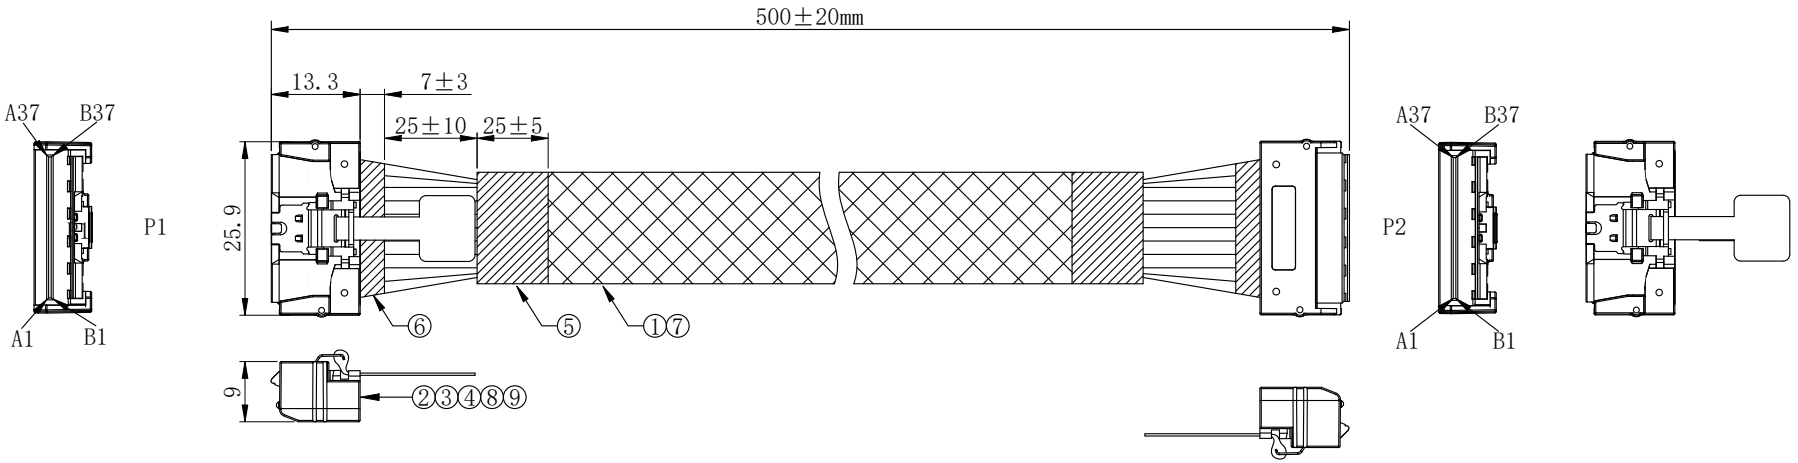



LP 8I DUST CAP⑩

ELECTRICAL CHARACTER:
a. 100% OPEN&SHORT TESTING;
b. WITHSTANDING VOLTAGE:DC 300V 0.01Sec;
c. INSULATION RESISTANCE:10M Ohm(Min);
d. CONDUCTIVE RESISTANCE:2 Ohm (Max).

| NO. | PART NAME | SPEC DESCRIPTION | QT'Y | UNIT |
|---|---|---|---|---|
| 10 | DUST CAP | LP 8I DUST CAP | 2 | PCS |
| 9 | PULL TAB | PULL TAB | 2 | PCS |
| 8 | LATCH | STAINLESS STEEL | 2 | PCS |
| 7 | BRAIDED SLEEVING | PET OD:10mm, BLACK | A/R | M |
| 6 | ACETATE TAPE | W=7±3mm,BLACK | A/R | M |
| 5 | ACETATE TAPE | W=25±5mm,BLACK | A/R | M |
| 4 | MOLDING | PBT+20%GF,BLACK | A/R | G |
| 3 | MOLDING | LDPE,NATURAL | A/R | G |
| 2 | PCB | LP SLIMSAS 8I PCB, PIN:Au 15U" 88±8 ohm | 2 | PCS |
| 1 | CABLE | 32AWG*1P+32AWG*2C, OD0.65*1.54mm,85±5 ohm | A/R | M |

| REV | DESCRIPTION OF CHANGE | DATE |
|---|---|---|
| A | INITIAL RELEASE | 26/08/05 |

| TOLERANCE | INCHES | MM |
|---|---|---|
| .X | .015 | .30 |
| .XX | .010 | .10 |
| .XXX | .005 | .05 |


| | |
|---|---|
| DRAWN BY | WXF |
| CHECK BY | |
| APPD BY | |
| CUSTOMER P/N: | |

OIKWAN® 东莞市蔼群实业有限公司
DONGGUAN AIQUN INDUSTRIAL CO.,LTD

| | | | |
|---|---|---|---|
| SCALE | NONE | REV | A |
| UNIT | MM | | |
| SHEET | 1/2 | CUSTUMER: | |
| DATE | 26/08/05 | DWG NO: | |

TITLE: LP SLIMSAS 8I-8I

P/N: 1.AMSDD0010001

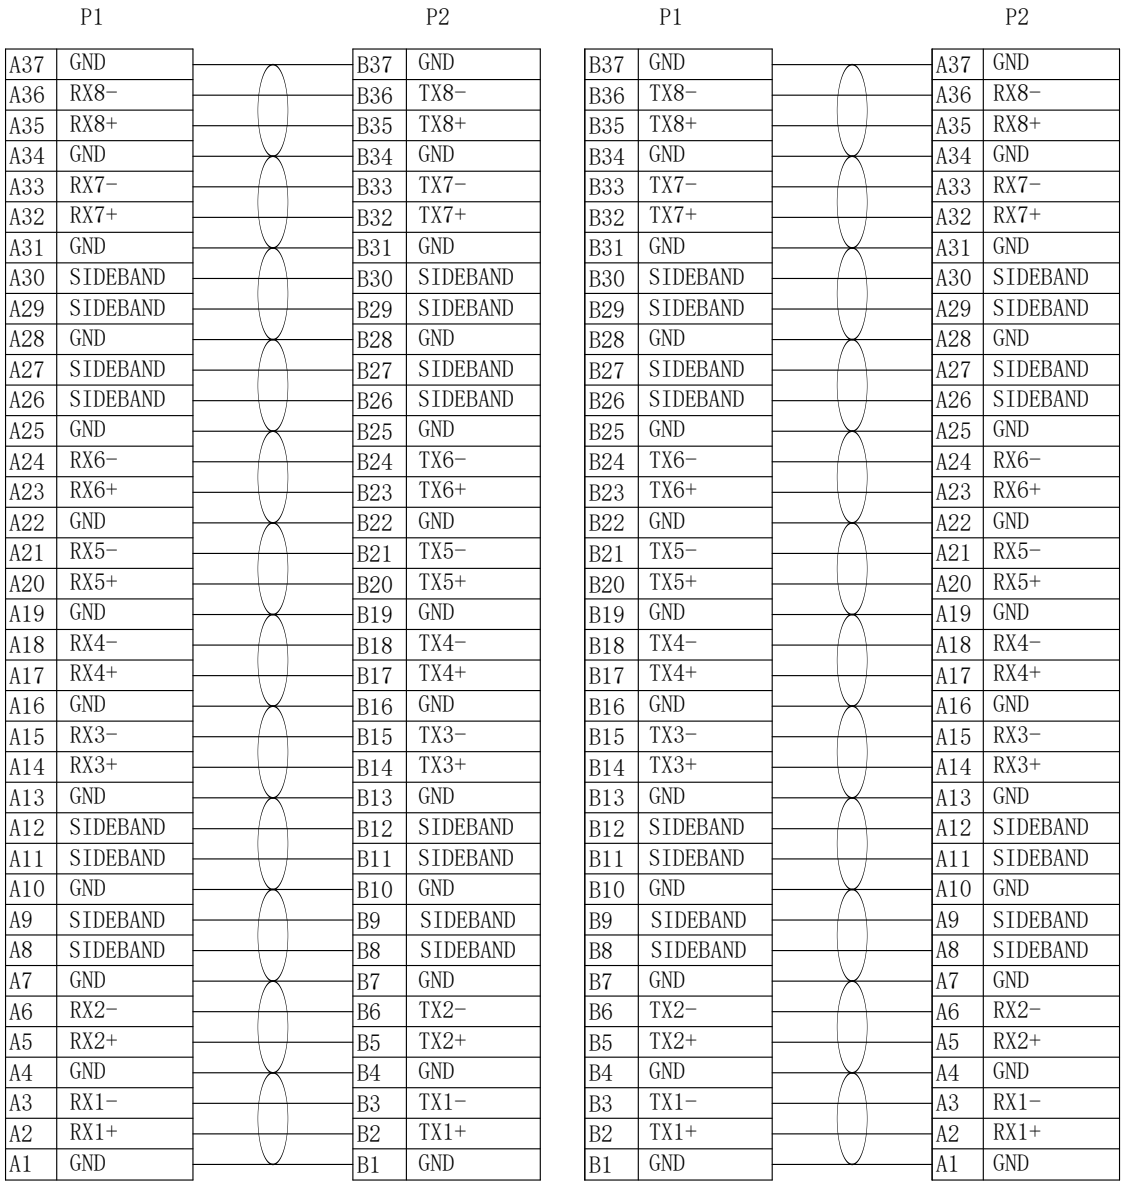


| REV | DESCRIPTION OF CHANGE | DATE |
|---|---|---|
| A | INITIAL RELEASE | 26/08/05 |

| TOLERANCE | INCHES | MM |
|---|---|---|
| .X | .015 | .30 |
| .XX | .010 | .10 |
| .XXX | .005 | .05 |

DRAWN BY: WXF
CHECK BY:
APPD BY:
CUSTOMER P/N:

OIKWAN® 东莞市蔼群实业有限公司
DONGGUAN AIQUN INDUSTRIAL CO.,LTD

| | | | |
|---|---|---|---|
| SCALE | NONE | REV | A |
| UNIT | MM | | |
| SHEET | 2/2 | CUSTUMER: | |
| DATE | 26/08/05 | DWG NO: | |

TITLE: LP SLIMSAS 8I-8I

P/N: 1.AMSDD0010001