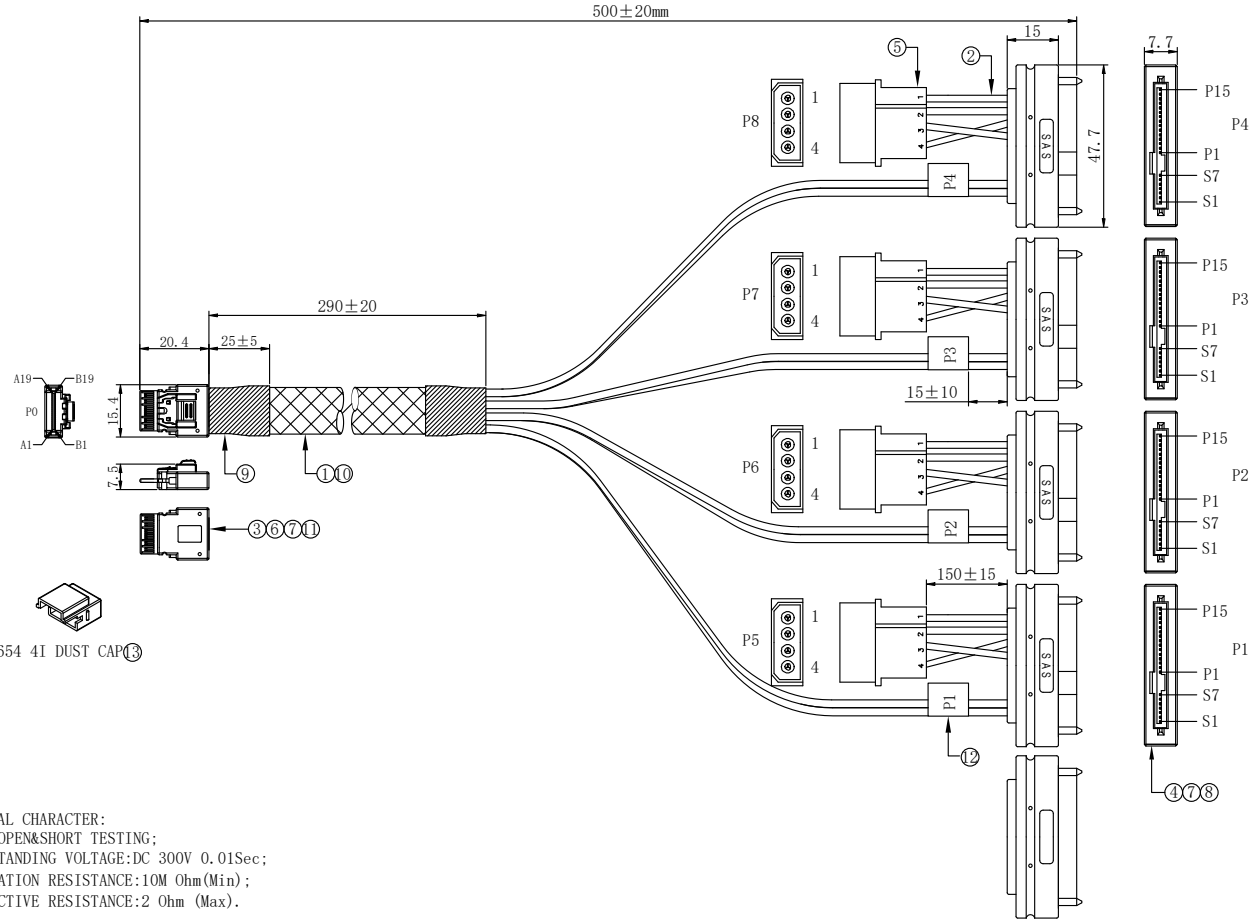



PIN ASSIGNMENT:

| P0 | | P4 | | P8 | |
|---|---|---|---|---|---|
| GND | B19 | GND | S1 | P13, P14, P15 | 1 YELLOW |
| TX4+ | B17 | RX4+ | S2 | P10, P11, P12 | 2 BLACK |
| TX4− | B18 | RX4− | S3 | P7, P8, P9 | 4 RED |
| GND | A19/B16 | GND | S4 | P4, P5, P6 | 3 BLACK |
| RX4− | A18 | TX4− | S5 | | |
| RX4+ | A17 | TX4+ | S6 | | |
| GND | A16 | GND | S7 | | |

| P0 | | P3 | | P7 | |
|---|---|---|---|---|---|
| GND | B16 | GND | S1 | P13, P14, P15 | 1 YELLOW |
| TX3+ | B14 | RX3+ | S2 | P10, P11, P12 | 2 BLACK |
| TX3− | B15 | RX3− | S3 | P7, P8, P9 | 4 RED |
| GND | A16/B13 | GND | S4 | P4, P5, P6 | 3 BLACK |
| RX3− | A15 | TX3− | S5 | | |
| RX3+ | A14 | TX3+ | S6 | | |
| GND | A13 | GND | S7 | | |

| P0 | | P2 | | P6 | |
|---|---|---|---|---|---|
| GND | B7 | GND | S1 | P13, P14, P15 | 1 YELLOW |
| TX2+ | B5 | RX2+ | S2 | P10, P11, P12 | 2 BLACK |
| TX2− | B6 | RX2− | S3 | P7, P8, P9 | 4 RED |
| GND | A7/B4 | GND | S4 | P4, P5, P6 | 3 BLACK |
| RX2− | A6 | TX2− | S5 | | |
| RX2+ | A5 | TX2+ | S6 | | |
| GND | A4 | GND | S7 | | |

| P0 | | P1 | | P5 | |
|---|---|---|---|---|---|
| GND | B4 | GND | S1 | P13, P14, P15 | 1 YELLOW |
| TX1+ | B2 | RX1+ | S2 | P10, P11, P12 | 2 BLACK |
| TX1− | B3 | RX1− | S3 | P7, P8, P9 | 4 RED |
| GND | A4/B1 | GND | S4 | P4, P5, P6 | 3 BLACK |
| RX1− | A3 | TX1− | S5 | | |
| RX1+ | A2 | TX1+ | S6 | | |
| GND | A1 | GND | S7 | | |

ELECTRICAL CHARACTER:
a. 100% OPEN&SHORT TESTING;
b. WITHSTANDING VOLTAGE:DC 300V 0.01Sec;
c. INSULATION RESISTANCE:10M Ohm(Min);
d. CONDUCTIVE RESISTANCE:2 Ohm (Max).

| NO. | PART NAME | SPEC DESCRIPTION | QT'Y | UNIT |
|---|---|---|---|---|
| 13 | DUST CAP | 8654 4I DUST CAP | 1 | PCS |
| 12 | LABEL | WHITE SYNTHETIC PAPER LABEL WITH BLACK TEXT "P1&P2&P3&P4" | 4 | PCS |
| 11 | LATCH | STAINLESS STEEL | 1 | PCS |
| 10 | EXPANDO | PET OD: 10mm, BLACK | A/R | M |
| 9 | ACETATE TAPE | W=25±5mm, BLACK | A/R | M |
| 8 | MOLDING | 45P PVC BLACK | A/R | G |
| 7 | MOLDING | LDPE, NATURAL | A/R | G |
| 6 | MOLDING | PBT+20%GF, BLACK | A/R | G |
| 5 | CONNECTOR | 4P, NATURAL, PH5.08, PIN:G/F | 4 | PCS |
| 4 | CONNECTOR | SAS 29P/F, PIN:G/F | 4 | PCS |
| 3 | PCB | SLIMSAS 8654 4I PCB, PIN:Au 15U" 88±8 ohm | 1 | PCS |
| 2 | CABLE | 20AWG CABLE(YELLOW/BLACK/RED/BLACK) | A/R | M |
| 1 | CABLE | 32AWG*1P+32AWG*2C, OD0.65*1.54mm, 85±5 ohm | A/R | M |

| REV | DESCRIPTION OF CHANGE | DATE |
|---|---|---|
| A | INITIAL RELEASE | 26/06/06 |

| TOLERANCE | INCHES | MM |
|---|---|---|
| .X | .015 | .30 |
| .XX | .010 | .10 |
| .XXX | .005 | .05 |

DRAWN BY: WXF
CHECK BY:
APPD BY:
CUSTOMER P/N:

OIKWAN® 东莞市蔼群实业有限公司
DONGGUAN AIQUN INDUSTRIAL CO.,LTD

| | | | |
|---|---|---|---|
| SCALE | NONE | REV | A |
| UNIT | MM | | |
| SHEET | 1/1 | CUSTUMER: | |
| DATE | 26/06/06 | DWG NO: | |

TITLE: MLIMSAS 8654 4I-4*8482+大4P
P/N: 1.AMS950P10001