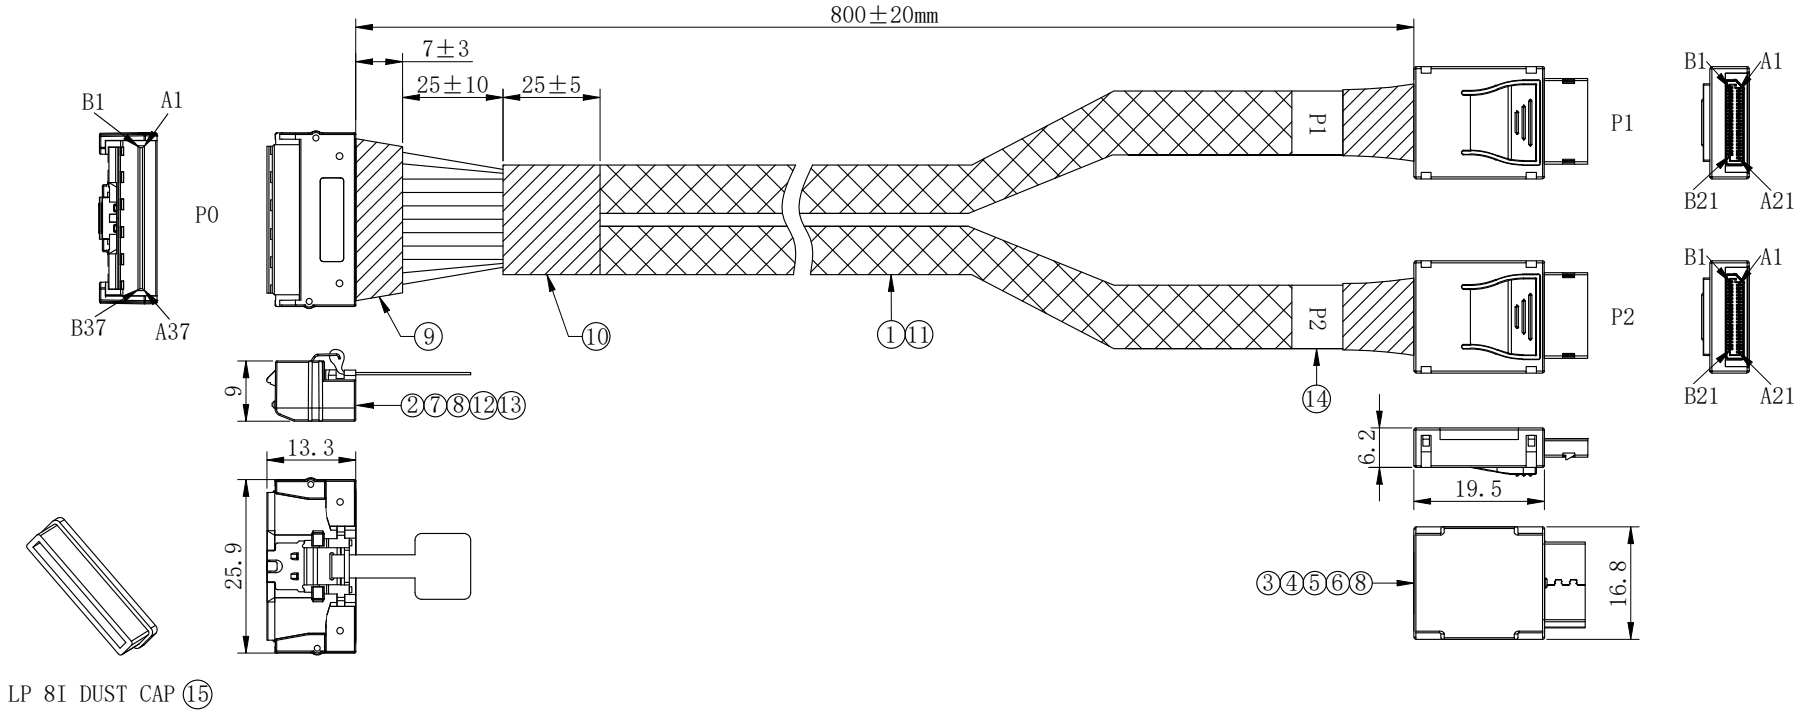


LP 8I DUST CAP ⑮

NO.	PART NAME	SPEC DESCRIPTION	QT'Y	UNIT
15	DUST CAP	LP 8I DUST CAP	1	PCS
14	LABEL	WHITE SYNTHETIC PAPER LABEL WITH BLACK TEXT "P1/P2"	2	PCS
13	PULL TAB	PULL TAB	1	PCS
12	LATCH	STAINLESS STEEL	1	PCS
11	BRAIDED SLEEVING	PET BALCK OD: 10mm	A/R	M
10	ACETATE TAPE	W=25±5mm, BALCK	A/R	M
9	ACETATE TAPE	W=7±3mm, BALCK	A/R	M
8	MOLDING	LDPE,NATURAL	A/R	G
7	MOLDING	PBT+20%GF, BALCK	A/R	G
6	HOUSING	OCULINK 4I TOP COVER PA66,BALCK	2	PCS
5	HOUSING	OCULINK 4I BOTTOM COVE PA66,BALCK	2	PCS
4	CONNECTOR	OCULINK 4I CONN	2	PCS
3	PCB	OCULINK 4I PCB 88±8 ohm	2	PCS
2	PCB	LP SLIMSAS 8I PCB, PIN:Au 15U" 88±8 ohm	1	PCS
1	CABLE	32AWG*1P+32AWG*2C, OD0.65*1.54mm,85±5 ohm	A/R	M

ELECTRICAL CHARACTER:
a. 100% OPEN&SHORT TESTING;
b. WITHSTANDING VOLTAGE:DC 300V 0.01Sec;
c. INSULATION RESISTANCE:10M Ohm(Min);
d. CONDUCTIVE RESISTANCE:2 Ohm (Max).


REV	DESCRIPTION OF CHANGE	DATE
A	INITIAL RELEASE	26/08/05

TOLERANCE	INCHES	MM
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05

OIKWAN® 东莞市蔻群实业有限公司
DONGGUAN AIQUN INDUSTRIAL CO.,LTD

DRAWN BY	WXF	SCALE	NONE
CHECK BY		UNIT	MM
APPD BY		SHEET	1/2
CUSTOMER P/N:		DATE	26/08/05

REV A
CUSTUMER:
DWG NO:
TITLE: LP 8I-2*8611
P/N:1.AMSD80010001

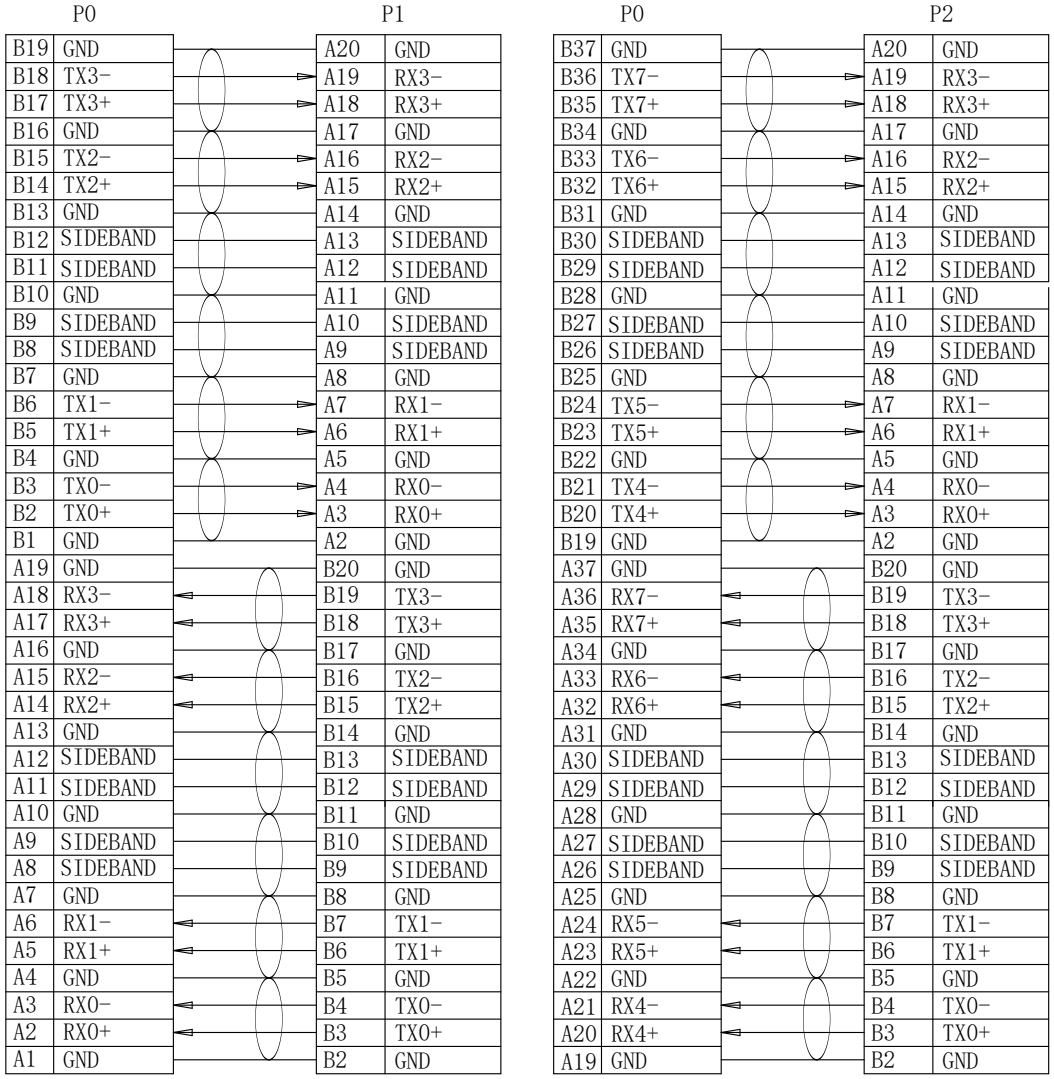

A	INITIAL RELEASE	26/08/05
REV	DESCRIPTION OF CHANGE	DATE

TOLERANCE	INCHES	MM
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05
DRAWN BY	WXF	
CHECK BY		
APPD BY		
CUSTOMER P/N:		

OIKWAN® 东莞市蔼群实业有限公司
DONGGUAN AIQUN INDUSTRIAL CO.,LTD

SCALE	NONE	REV	A
UNIT	MM		
SHEET	2/2	CUSTUMER:	
DATE	26/08/05	DWG NO:	

TITLE: LP 8I-2*8611

P/N:1.AMSD80010001