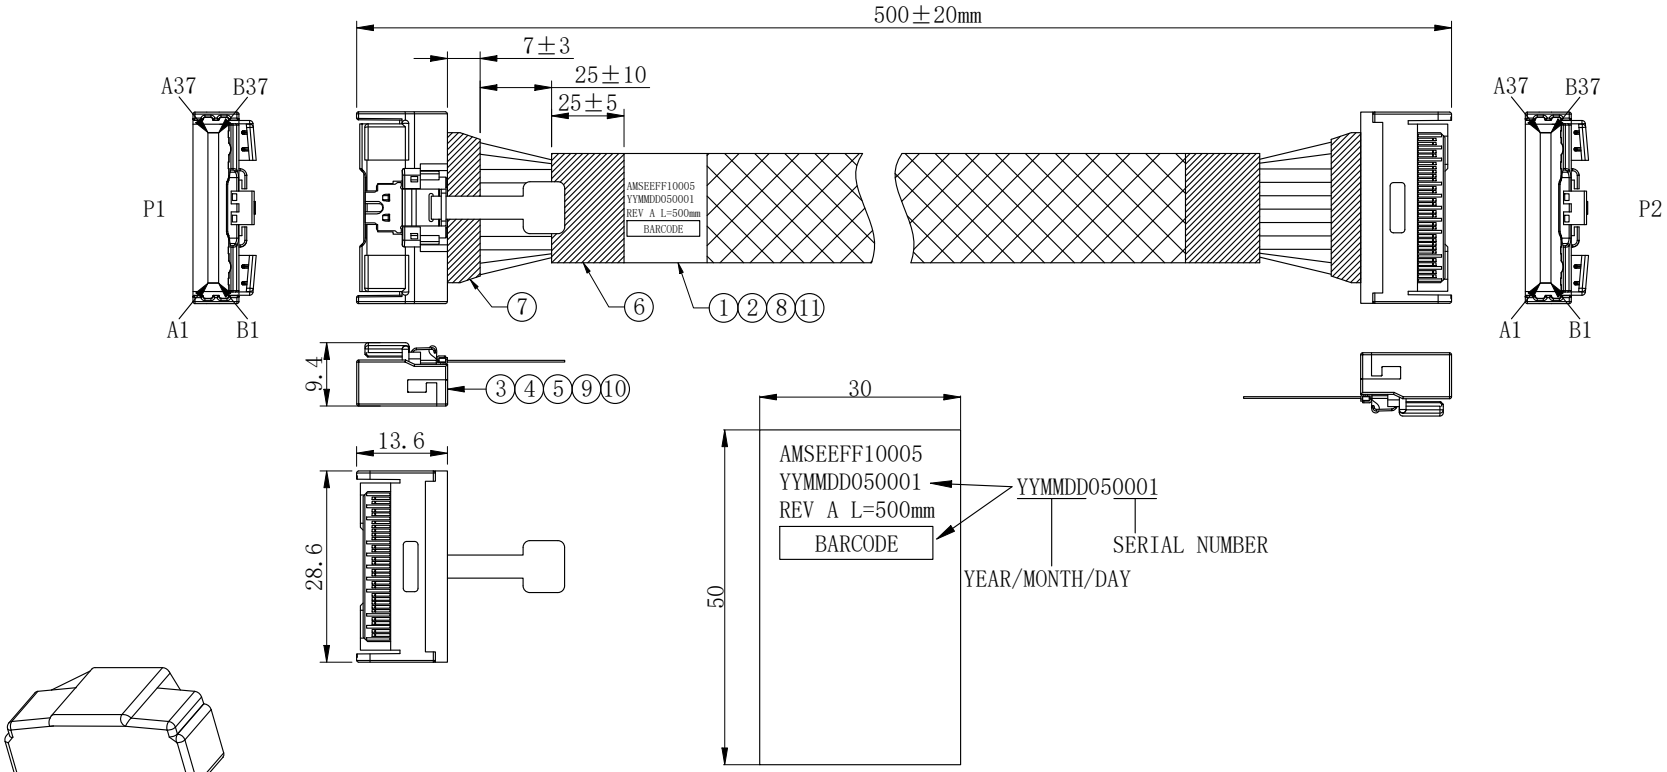


MCIO 8X DUST CAP ⑫

ELECTRICAL CHARACTER:
a. 100% OPEN&SHORT TESTING;
b. WITHSTANDING VOLTAGE:DC 300V 0.01Sec;
c. INSULATION RESISTANCE:10M Ohm(Min);
d. CONDUCTIVE RESISTANCE:2 Ohm (Max).

NO.	PART NAME	SPEC DESCRIPTION	QT'Y	UNIT
12	DUST CAP	MCIO 8X DUST CAP	2	PCS
11	LABEL	WHITE SYNTHETIC PAPER LABEL WITH BLACK TEXT	1	PCS
10	PULL TAB	PULL TAB	2	PCS
9	LATCH	STAINLESS STEEL	2	PCS
8	BRAIDED SLEEVING	PET OD：10mm,BLACK	A/R	M
7	ACETATE TAPE	W=10±3mm,BLACK	A/R	M
6	ACETATE TAPE	W=25±5mm,BLACK	A/R	M
5	MOLDING	PA,BLACK	A/R	G
4	HOUSING	MCIO 8X PA66+20%GF BLACK ANTI-SKEW HOUSING	2	PCS
3	PCB	MCIO 8X PCB,PIN:Au 15U″,88±8 ohm	2	PCS
2	CABLE	SAS 3.0 (30AWG*1P+34AWG*2C) OD0.81*1.79,85±5 ohm	A/R	M
1	CABLE	PCIE 5.0 (30AWG*1P+34AWG*2C) OD0.88*1.78,85±5 ohm	A/R	M

REV	DESCRIPTION OF CHANGE	DATE
A	INITIAL RELEASE	26/08/05

TOLERANCE	INCHES	MM
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05


DRAWN BY	WXF
CHECK BY	
APPD BY	
CUSTOMER P/N:	

OIKWAN® 东莞市蔻群实业有限公司
DONGGUAN AIQUN INDUSTRIAL CO.,LTD

SCALE	NONE	REV	A
UNIT	MM		
SHEET	1/2	CUSTUMER:	
DATE	26/08/05	DWG NO:	

TITLE: MCIO 8X-MCIO 8X

P/N: 1.AMSEEFF10005

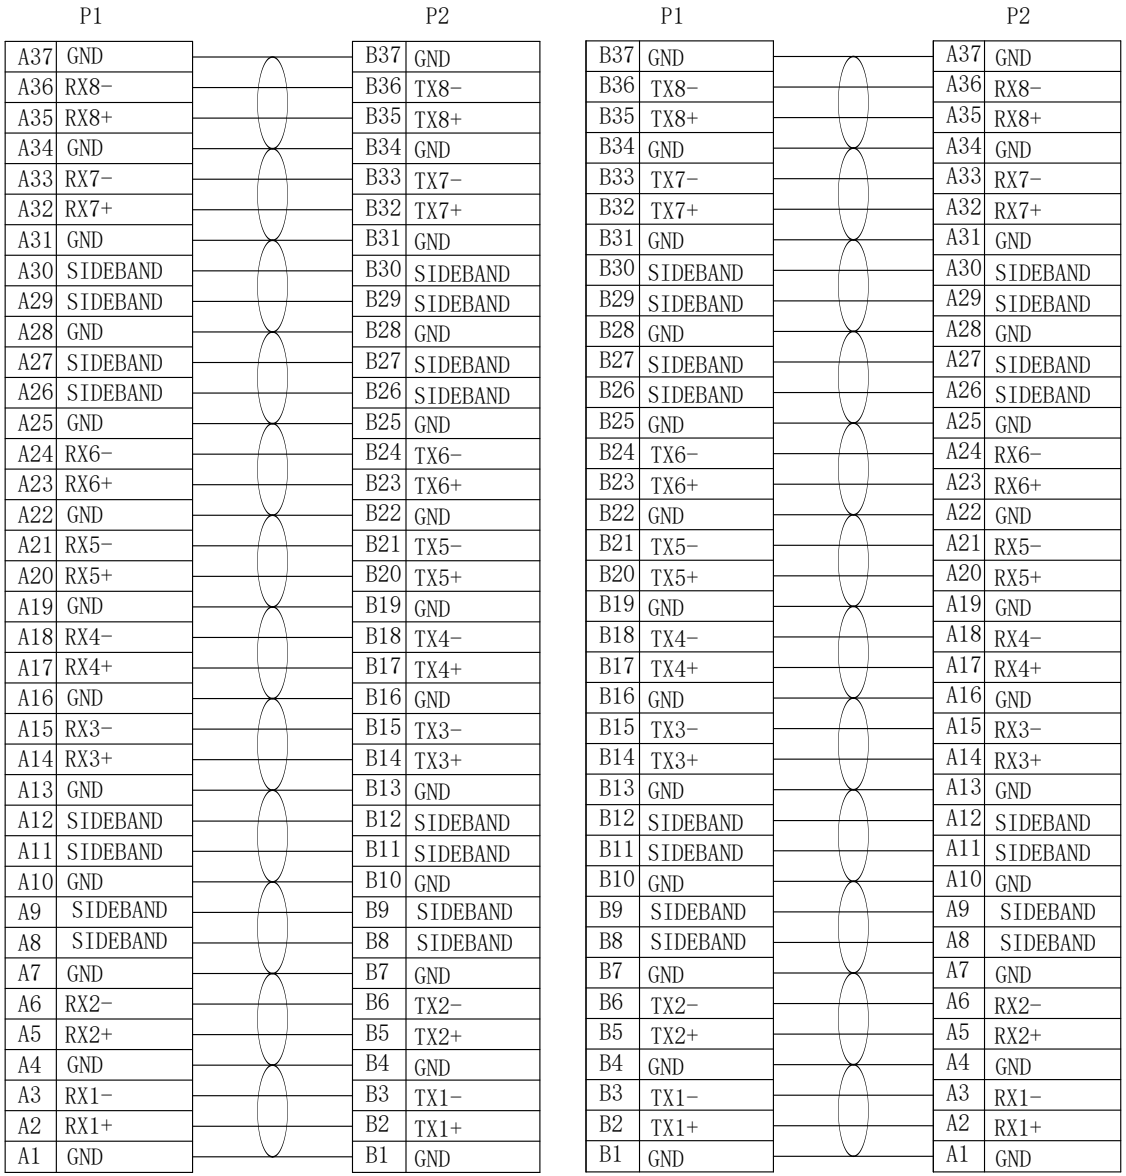

REV	DESCRIPTION OF CHANGE	DATE
A	INITIAL RELEASE	26/08/05

TOLERANCE	INCHES	MM
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05

DRAWN BY	WXF
CHECK BY	
APPD BY	
CUSTOMER P/N:	

OIKWAN® 东莞市蔼群实业有限公司
DONGGUAN AIQUN INDUSTRIAL CO.,LTD

SCALE	NONE	REV	A
UNIT	MM		
SHEET	2/2	CUSTUMER:	
DATE	26/08/05	DWG NO:	

TITLE: MCIO 8X-MCIO 8X

P/N: 1.AMSEEFF10005