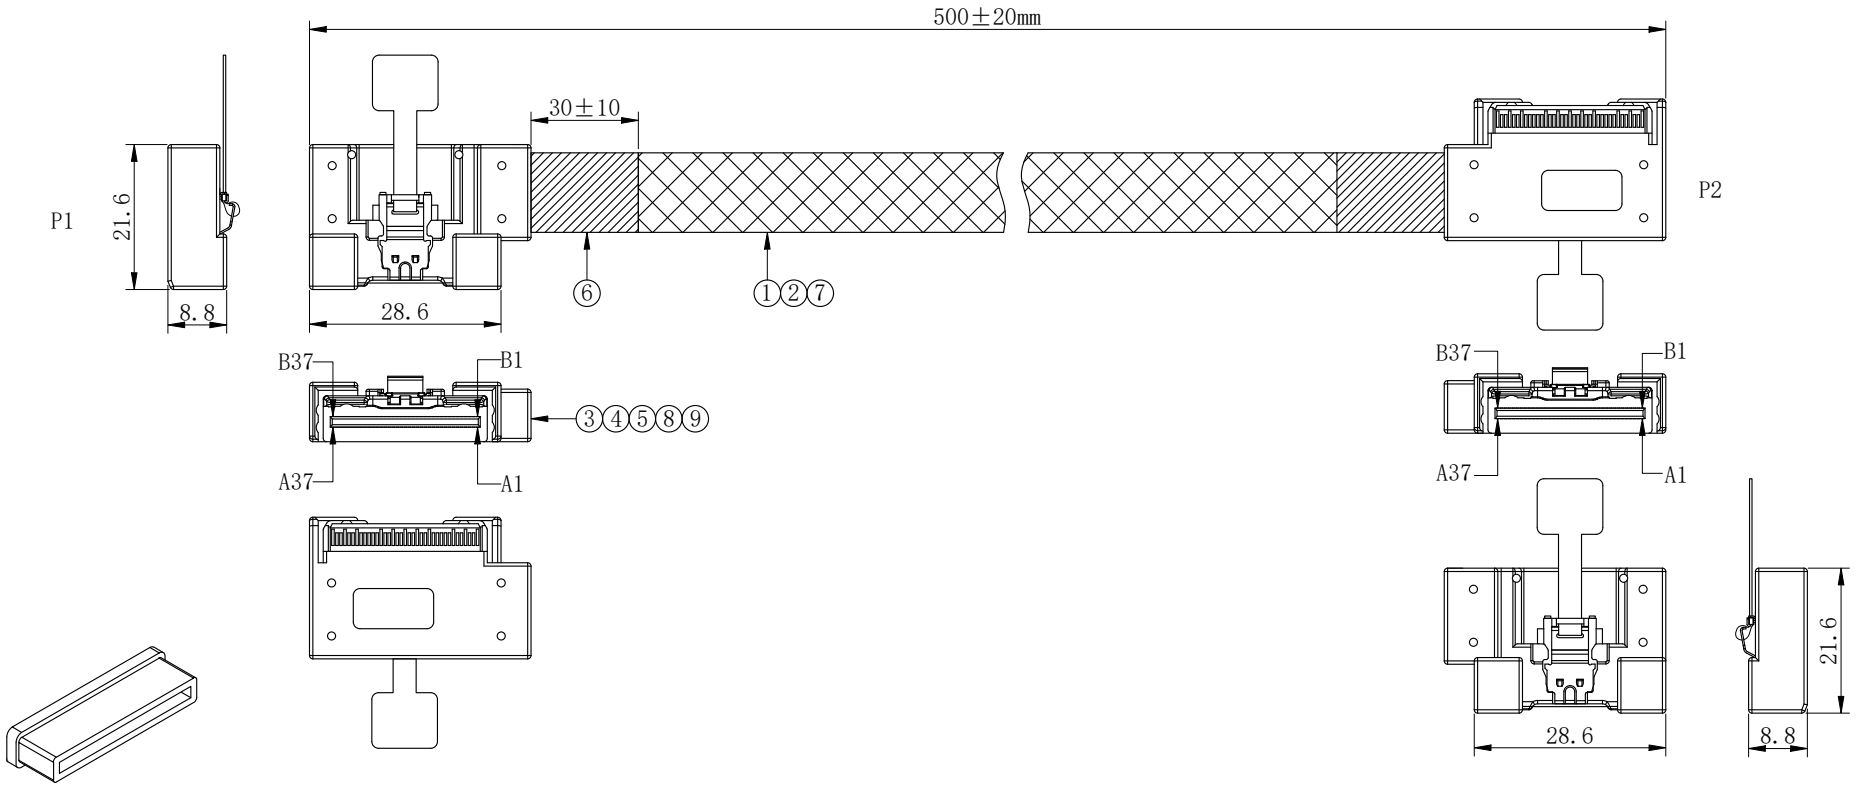


MCIO 8X DUST CAP ⑩

ELECTRICAL CHARACTER:
a. 100% OPEN&SHORT TESTING;
b. WITHSTANDING VOLTAGE:DC 300V 0.01Sec;
c. INSULATION RESISTANCE:10M Ohm(Min);
d. CONDUCTIVE RESISTANCE:2 Ohm (Max).

NO.	PART NAME	SPEC DESCRIPTION	QT'Y	UNIT
10	DUST CAP	MCIO 8X DUST CAP	2	PCS
9	PULL TAB	PULL TAB	2	PCS
8	LATCH	STAINLESS STEEL	2	PCS
7	BRAIDED SLEEVING	PET OD: 10mm, BALCK	A/R	M
6	ACETATE TAPE	W=25±5mm, BLACK	A/R	M
5	MOLDING	LDPE, NATURAL	A/R	G
4	MOLDING	PBT+20%GF, BLACK	A/R	G
3	PCB	MCIO 8X PCB, PIN:Au 15U", 88±8 ohm SIDE EXIT	2	PCS
2	CABLE	SAS 3.0 (30AWG*1P+34AWG*2C) OD0.81*1.79, 85±5 ohm	A/R	M
1	CABLE	PCIE 5.0 (30AWG*1P+34AWG*2C) OD0.88*1.78, 85±5 ohm	A/R	M

REV	DESCRIPTION OF CHANGE	DATE
A	INITIAL RELEASE	26/08/06

TOLERANCE	INCHES	MM
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05


DRAWN BY	WXF
CHECK BY	
APPD BY	
CUSTOMER P/N:	

OIKWAN® 东莞市蔼群实业有限公司
DONGGUAN AIQUN INDUSTRIAL CO.,LTD

SCALE	NONE	REV	A
UNIT	MM		
SHEET	1/2	CUSTUMER:	
DATE	26/08/06	DWG NO:	

TITLE:MCIO 8X LEFT TURN-8X RIGHT TURN

P/N:1.AMSEE2310003

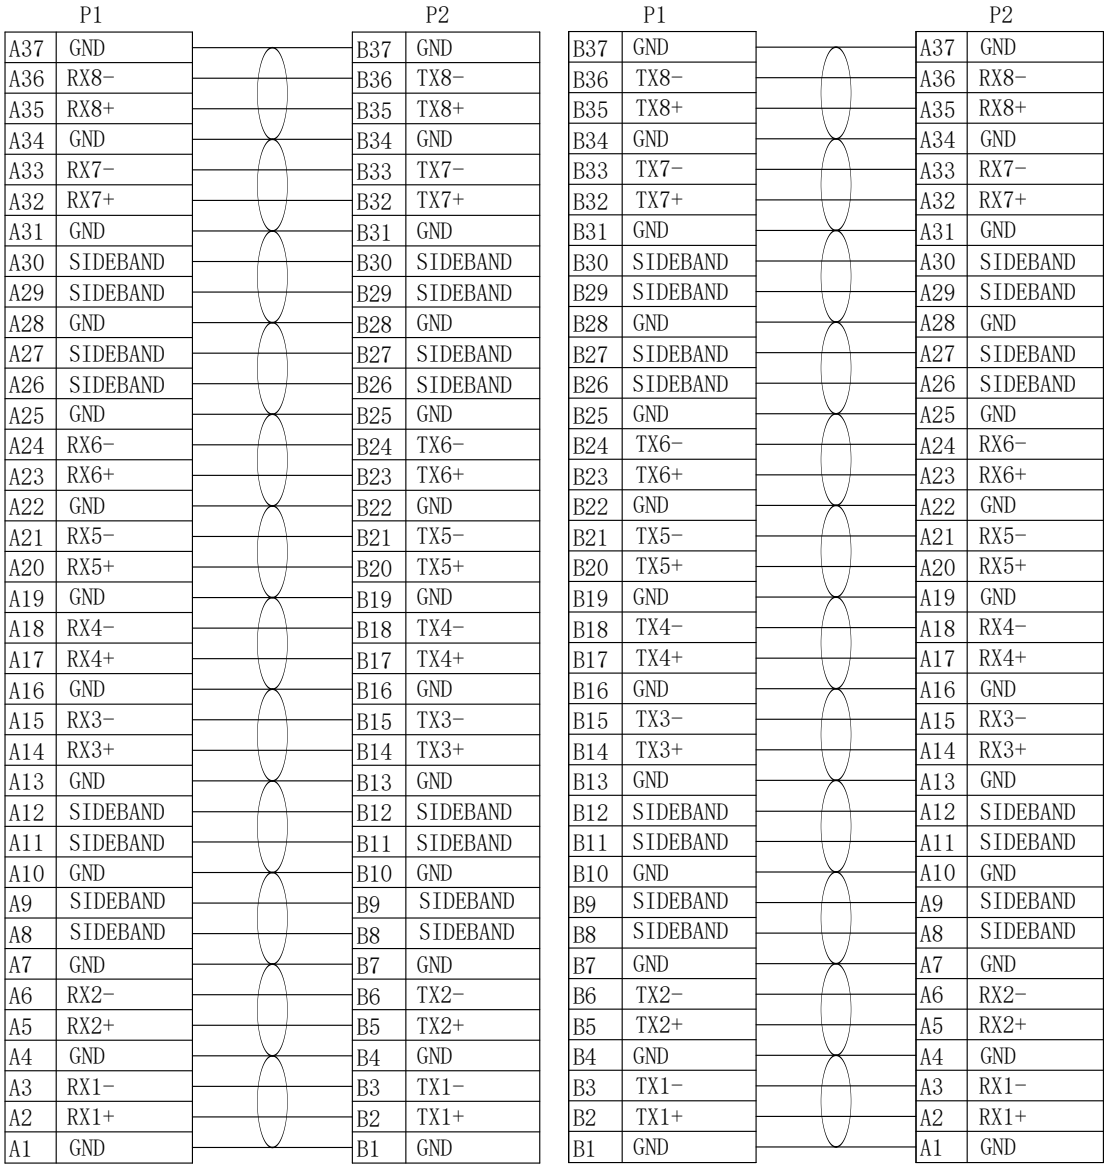

REV	DESCRIPTION OF CHANGE	DATE
A	INITIAL RELEASE	26/08/06

TOLERANCE	INCHES	MM
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05

DRAWN BY	WXF
CHECK BY	
APPD BY	
CUSTOMER P/N:	

OIKWAN® 东莞市蔼群实业有限公司
DONGGUAN AIQUN INDUSTRIAL CO.,LTD

SCALE	NONE	REV	A
UNIT	MM		
SHEET	2/2	CUSTUMER:	
DATE	26/08/06	DWG NO:	

TITLE:MCIO 8X LEFT TURN-8X RIGHT TURN

P/N:1.AMSEE2310003